

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE


**INLEC.COM**

# DATA-SHEET



Nationwide Low Call  
**0333 6000 600**

**WHY BUY**  
WHEN YOU CAN HIRE

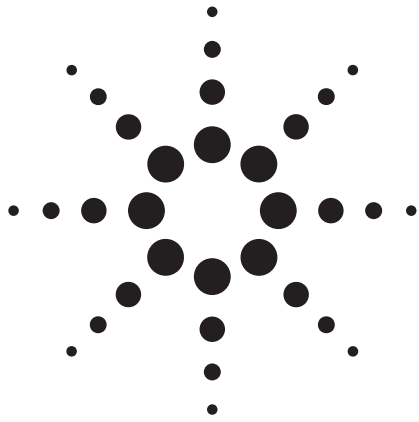


# Agilent 33120A

## Function/Arbitrary Waveform Generator

Data Sheet



- 15 MHz sine and square wave outputs
- Sine, triangle, square, ramp, noise and more
- 12-bit, 40MSa/s, 16,000-point deep arbitrary waveforms
- Direct digital synthesis for excellent stability

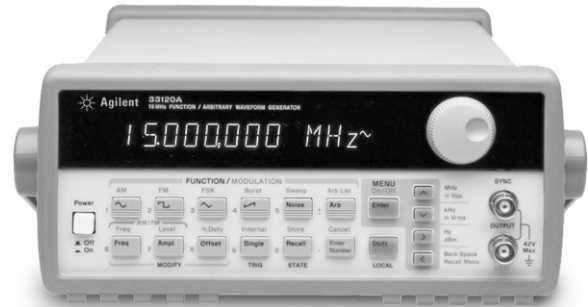

### Uncompromising performance for standard waveforms

The Agilent Technologies 33120A Function/Arbitrary Waveform Generator uses direct digital-synthesis techniques to create a stable, accurate output signal for clean, low-distortion sine waves. It also gives you fast rise- and fall-time square wave, and linear ramp waveforms down to 100  $\mu$ Hz.

### Custom waveform generation

Use the 33120A to generate complex custom waveforms such as a heart-beat or the output of a mechanical transducer. With 12-bit resolution, and a sampling rate of 40 MSa/s, the 33120A gives you the flexibility to create any waveform you need. It also lets you store up to four 16,000-deep waveforms in nonvolatile memory.

### Easy-to-use functionality

Front-panel operation of the 33120A is straightforward and intuitive.

You can access any of ten major functions with a single key press or two, then use a simple knob to adjust frequency, amplitude and offset. To save time, you can enter voltage values directly in Vp-p, Vrms or dBm.

Internal AM, FM, FSK and burst modulation make it easy to modulate waveforms without the need for a separate modulation source.

Linear and log sweeps are also built in, with sweep rates selectable from 1 ms to 500 s. GPIB and RS-232 interfaces are both standard, plus you get full programmability using SCPI commands.

### Optional phase-lock capability

The Option 001 phase lock/TCXO timebase gives you the ability to generate synchronized phase-offset signals. An external clock input/output lets you synchronize with up to three other 33120As or with an external 10-MHz clock.

Option 001 also gives you a TCXO timebase for increased frequency stability. With accuracy of 4 ppm/yr, the TCXO timebase make a 33120A ideal for frequency calibrations and other demanding applications.

With Option 001, new commands let you perform phase changes on the fly, via the front panel or from a computer, allowing precise phase calibration and adjustment.

### Link the Agilent 33120A to your PC

The included Agilent IntuiLink software allows you to easily create, edit, and download complex waveforms using the IntuiLink Arbitrary Waveform Editor. Or you can capture a waveform using IntuiLink Oscilloscope or DMM and send it to the 33120A for output. For programmers, ActiveX components can be used to control the instrument using SCPI commands. IntuiLink provides the tools to easily create, download, and manage waveforms for your 33120A. To find out more about IntuiLink, visit [www.agilent.com/find/intuilink](http://www.agilent.com/find/intuilink).

The 33120A can also be used in conjunction with the 34811A BenchLink Arb software. This Windows®-based program lets you create and edit waveforms on your PC and download them to the 33120A.



## Waveforms

<b>Standard</b>	Sine, square, triangle, ramp, noise, sin(x)/x, exponential rise exponential fall, cardiac, dc volts.
-----------------	------------------------------------------------------------------------------------------------------

<b>Arbitrary</b>	
Waveform length	8 to 16,000 points
Amplitude resolution	12 bits (including sign)
Sample rate	40 MSa/s
Non-volatile memory	Four (4) 16,000 waveforms

## Frequency Characteristics

Sine	100 $\mu$ Hz - 15 MHz
Square	100 $\mu$ Hz - 15 MHz
Triangle	100 $\mu$ Hz - 100 kHz
Ramp	100 $\mu$ Hz - 100 kHz
White noise	10 MHz bandwidth
Resolution	10 $\mu$ Hz or 10 digits
Accuracy	10 ppm in 90 days, 20 ppm in 1 year, 18°C - 28°C
Temp. Coeff	< 2 ppm/°C
Aging	< 10 ppm/yr

## Sinewave Spectral Purity

<b>Harmonic distortion</b>	
dc to 20 kHz	-70 dBc
20 kHz to 100 kHz	-60 dBc
100 kHz to 1 MHz	-45 dBc
1 MHz to 15 MHz	-35 dBc

<b>Spurious (non-harmonic)</b>	
DC to 1 MHz	< -65 dBc
1 MHz to 15 MHz	< -65 dBc + 6 dB/octave

<b>Total harmonic distortion</b>	
DC to 20 kHz	<0.04%

<b>Phase noise</b>	<55 dBc in a 30 kHz band
--------------------	--------------------------

## Signal Characteristics

<b>Squarewave</b>	
Rise/Fall time	< 20 ns
Overshoot	4%
Asymmetry	1% + 5ns
Duty cycle	20% to 80% (to 5 MHz) 40% to 60% (to 15 MHz)

<b>Triangle, Ramp, Arb</b>	
Rise/Fall time	40 ns (typical)
Linearity	<0.1% of peak output
Setting Time	<250 ns to 0.5% of final value
Jitter	<25ns

## Output Characteristics

<b>Amplitude</b> (into 50 $\Omega$ )	50 mVpp - 10 Vpp <sup>[1]</sup>
Accuracy (at 1 kHz)	$\pm$ 1% of specified output
Flatness ( <i>sinewave relative to 1 kHz</i> )	
< 100 kHz	$\pm$ 1% (0.1 dB)
100 kHz to 1 MHz	$\pm$ 1.5% (0.15 dB)
1 Mz to 15 MHz	$\pm$ 2% (0.2 dB) Ampl $\geq$ 3Vrms $\pm$ 3.5% (0.3 dB) Ampl < 3Vrms
Output Impedance	50 $\Omega$ (fixed)
Offset (into 50 $\Omega$ ) <sup>[2]</sup>	+ 5 Vpk ac + dc
Accuracy	$\pm$ 2% of setting + 2 mV
Resolution	3 digits, amplitude and offset
Units	Vpp, Vrms, dBm
Isolation	42 Vpk maximum to earth
Protection	Short circuit protected $\pm$ 15 Vpk overdrive < 1 minute

<b>Modulation</b>	
<b>AM</b>	
Carrier -3dB Freq.	10 MHz (typical)
Modulation	any internal waveform including Arb
Frequency	10 MHz - 20 kHz
Depth	0% - 120%
Source	Internal/External

<b>FM</b>	
Modulation	any internal waveform including Arb
Frequency	10 MHz - 10 kHz
Deviation	10 MHz - 15 MHz
Source	Internal only

<b>FSK</b>	
Internal rate	10 MHz - 50 kHz
Frequency Range	10 MHz - 15 MHz
Source	Internal/External (1 MHz max.)

<b>Burst</b>	
Carrier Freq.	5 MHz max.
Count	1 to 50,000 cycles or infinite
Start Phase	-360° to +360°
Internal Rate	10 MHz - 50 kHz $\pm$ 1%
Gate Source	Internal/External Gate
Trigger	Single, External or Internal Rate

<b>Sweep</b>	
Type	Linear or Logarithmic
Direction	Up or Down
Start F/Stop F	10 MHz - 15 MHz
Speed	1 ms to 500 s $\pm$ 0.1%
Trigger	Single, External, or Internal

<b>Rear Panel Inputs</b>	
Ext. AM Modulation	$\pm$ 5 Vpk = 100% modulation 5k $\Omega$ input resistance
External Trigger/ FSK/Burst Gate	TTL low true

## System Characteristics<sup>[3]</sup>

<b>Configuration Times<sup>[4]</sup></b>	
Function Change: <sup>[5]</sup>	80 ms
Frequency Change: <sup>[5]</sup>	30 ms
Amplitude Change:	30 ms
Offset Change:	10 ms
Select User Arb:	100 ms
Modulation Parameter Change:	<350 ms

## Arb Download Times over GPIB

Arb Length	Binary	ASCII Integer	ASCII Real <sup>[8]</sup>
16,000 points	8 sec	81 sec	100 sec
8,192 points	4 sec	42 sec	51 sec
4,096 points	2.5 sec	21 sec	26 sec
2,048 points	1.5 sec	11 sec	13 sec

## Arb Download Times over RS-232 at 9600 Baud:<sup>[7]</sup>

Arb Length	Binary	ASCII Integer	ASCII Real <sup>[8]</sup>
16,000 points	35 sec	101 sec	134 sec
8,192 points	18 sec	52 sec	69 sec
4,096 points	10 sec	27 sec	35 sec
2,048 points	6 sec	14 sec	18 sec

[1] 100 mVpp - 20 Vpp into open circuit

[2] Offset  $\leq$  2x pk - pk amplitude

[3] Times are typical. May vary based on controller performance

[4] Time to change parameter and output the new signal.

[5] Modulation or sweep off

[6] Times for 5-digit and 12-digit numbers

[7] For 4800 baud, multiply the download times by two; For 2400 baud, multiply the download times by four, etc.

[8] Time for 5-digit numbers; for 12-digit numbers, multiply the 5-digit numbers by two



### Option 001 Phaselock/TCXO Timebase


Timebase Accuracy	
Setability	< 0.01 ppm
Stability	$\pm 1$ ppm $0^\circ - 50^\circ$
Aging	< 2ppm in first 30 days (continuous operation) 0.1 ppm/month (after first 30 days)
External Reference Input	
Lock Range	10 MHz $\pm$ 50 Hz
Level	-10 dBm to + 15 dBm +25 dBm or 10 Vpp max input
Impedance	50 $\Omega$ $\pm$ 2%, 42 Vpk isolation to earth
Lock Time	< 2 seconds
Internal Reference Output	
Frequency	10 MHz
Level	> 1 Vpp into 50 $\Omega$
Phase Offset	
Range	+ 360 $^\circ$ to - 360 $^\circ$
Resolution	0.001 $^\circ$
Accuracy	25 ns
Trigger Output	
Level	5V zero-going pulse
Pulse Width	> 2 $\mu$ s typical
Fanout	Capable of driving up to three 33120As

### Ordering Information


Agilent 33120A Function/Arb Generator  
Opt. 001 Phase Lock/TCXO Timebase Option

### General

Power Supply	110V/120V/220V/240V $\pm$ 10%
Power Line Frequency	45 Hz to 66 Hz and 360 Hz to 440 Hz
Power Consumption	50VA peak (28 W average)
Operating Environment	0 $^\circ$ C to 55 $^\circ$ C
Storage Environment	-40 $^\circ$ C to 70 $^\circ$ C
State Storage Memory	Power Off state automatically saved, 3 User Configurable Stored States
Interface	IEEE-488 and RS-232 standard
Language	SCPI - 1993, IEEE-488.2
Dimensions (W x H x D)	
Bench top	254.4mm x 103.6mm x 374mm
Rack mount	212.6mm x 88.5mm x 348.3mm
Weight	4 kg (8.8 lbs)
Safety Designed to	UL-1244, CSA 1010, EN61010
EMC Tested to	MIL-461C, EN55011, EN50082-1
Vibration and Shock	MIL-T-28800, Type III, Class 5
Acoustic Noise	30 dBa
Warm-up Time	1 hour
Warranty	1 year

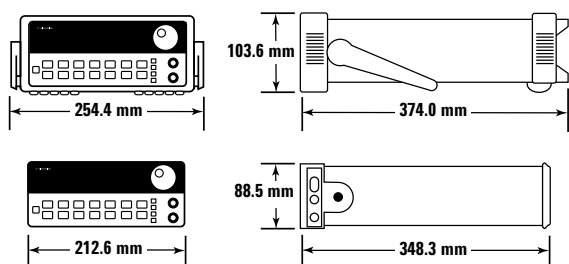

# INLEC, supporting you to deliver a world class service, every day, in every sector ...

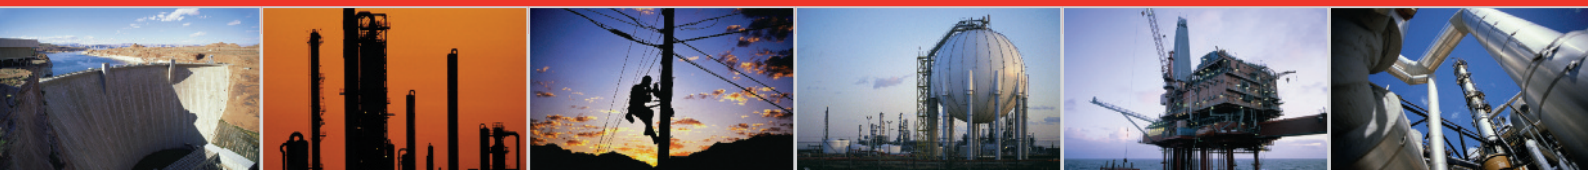

## OUR COMMITMENT TO YOU

### A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

### Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

### Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

### We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

## YOUR 5 WAY GUARANTEE

### 1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

### 2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

### 3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application\*.

### 4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

### 5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

\*subject to availability and conditions

## Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: [www.inlec.com](http://www.inlec.com)

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor