

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE



Single-Output: 500 W GPIB



6651A-6655A



- Increase test throughput with fast up and down programming time
- Protect valuable assemblies with fast protection features
- Proven reliability
- Low ripple and noise

This series of 500 W linear-regulated dc power supplies is designed to maximize the throughput of DUTs through the manufacturing test process with fast up and down programming time.

Valuable assemblies can be destroyed by a minor component failure that causes a surge of current to flow into the DUT. Fast protection features, including fast crowbar, mode crossover protection, and the ability to connect the protection circuitry of multiple power supplies can increase production yield.

Programming of the dc output and the protection features can be done either from the front panel or using industry standard SCPI commands, via the GPIB. Using the serial link, up to 16 power supplies can be connected through one GPIB address. Test system integration can be further simplified by using the *VXIPlug&Play* drivers. The output voltage and current can also be controlled with analog signals. This is helpful for certain types of noisy environments, and also immediate reactions to process changes.

Lab bench use is enhanced by the fan speed control, which helps to minimize the acoustic noise.

Specifications

(at 0° to 55°C unless otherwise specified)

	6651A	6652A	6653A	6654A	6655A	6651A-J01 Special Order Option
Number of outputs	1	1	1	1	1	1
GPIB	Yes	Yes	Yes	Yes	Yes	Yes
Output ratings						
Output voltage	0 to 8 V	0 to 20 V	0 to 35 V	0 to 60 V	0 to 120 V	10 V
Output current (40°C)	0 to 50 A	0 to 25 A	0 to 15 A	0 to 9 A	0 to 4 A	50 A
Maximum current (50°C/55°C)	45 A/42.5 A	22.5 A/21.3 A	13.5 A/12.8 A	8.1 A/7.7 A	3.6 A/3.4 A	45 A/42.5 A
Programming accuracy at 25°C ±5°C						
Voltage	0.06% +	5 mV	10 mV	15 mV	26 mV	51 mV
Current	0.15% +	60 mA	25 mA	13 mA	8 mA	4 mA
Ripple and noise						
from 20 Hz to 20 MHz						
Voltage rms	300 µV	300 µV	400 µV	500 µV	700 µV	300 µV
peak-peak	3 mV	3 mV	4 mV	5 mV	7 mV	3 mV
Current rms	25 mA	10 mA	5 mA	3 mA	2 mA	25 mA
Readback accuracy at 25°C ±5°C						
(percent of reading plus fixed)						
System models only						
Voltage	0.07% +	6 mV	15 mV	25 mV	40 mV	80 mV
+Current	0.15% +	67 mA	26 mA	15 mA	7 mA	3 mA
-Current	0.35% +	100 mA	44 mA	24 mA	15 mA	7 mA
Load regulation						
Voltage	1 mV	2 mV	3 mV	4 mV	5 mV	1 mV
Current	2 mA	1 mA	0.5 mA	0.5 mA	0.5 mA	2 mA
Line regulation						
Voltage	0.5 mV	0.5 mV	1 mV	1 mV	2 mV	0.5 mV
Current	2 mA	1 mA	0.75 mA	0.5 mA	0.5 mA	2 mA
Transient response time						
Less than 100 µs for the output voltage to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of rated current						
Supplemental Characteristics						
(Non-warranted characteristics determined by design and useful in applying the product)						
Average resolution						
Voltage	2 mV	5 mV	10 mV	15 mV	30 mV	2.5 mV
Current	15 mA	7 mA	4 mA	2.5 mA	1.25 mA	15 mA
OVP	12 mV	30 mV	54 mV	93 mV	190 mV	16 mV
OVP accuracy	160 mV	400 mV	700 mV	1.2 V	2.4 V	200 mV



Single-Output: 500 W GPIB (Continued)

Supplemental Characteristics for all model numbers

dc Floating Voltage: Output terminals can be floated up to ± 240 Vdc from chassis ground

Remote Sensing: Up to half the rated output voltage can be dropped in each load lead. The drop in the load leads subtracts from the voltage available for the load.

Command Processing Time: Average time required for the output voltage to begin to change following receipt of digital data is 20 ms for the power supplies connected directly to the GPIB

Output Programming Response Time: The rise and fall time (10/90% and 90/10%) of the output voltage is less than 15 ms. The output voltage change settles within 1 LSB (0.025% x rated voltage) of final value in less than 60 ms.

Down Programming: An active down programmer sinks approximately 20% of the rated output current

Modulation: (Analog programming of output voltage and current)
Input signal: 0 to -5 V
Input impedance: 10 k Ohm nominal

ac Input: (ac input frequency 47 to 63 Hz)
Voltage 100 Vac 120 Vac 220 Vac 240 Vac
Current 12 A 10 A 5.7 A 5.3 A

Input Power: 1,380 VA, 1,100 W at full load; 120 W at no load

GPIB Interface Capabilities: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, E1, and C0. IEEE-488.2 and SCPI-compatible command set.

Regulatory Compliance: Listed to UL 1244; conforms to IEC 61010-1.

Size: 425.5 mm W x 132.6 mm H x 497.8 mm D (16.75 in x 5.22 in x 19.6 in)
See page 101 for more details

Weight: Net, 25 kg (54 lb); shipping, 28 kg (61 lb)

Warranty Period: Three years

Specifications (at 0° to 55°C unless otherwise specified)	6651A-J03 Special Order Option	6651A-J09 Special Order Option	6652A-J03 Special Order Option	6653A-J04 Special Order Option	6653A-J17 Special Order Option
Number of outputs	1	1	1	1	1
GPIB	Yes	Yes	Yes	Yes	Yes
Output ratings					
Output voltage	6 V	17V/20 V	27 V	40 V	30 V
Output current (40°C)	60 A	30 A/15 A	18.5 A	12.5 A	17.5 A
Maximum current (50°C/55°C)	54 A/5 1A	27 A/25.5 A 13.5 A/12.75 A	16.65 A/15.72 A	11.25 A/10.6 A	15.75 A/14.87 A
Programming accuracy at 25°C \pm5°C					
Voltage	0.06% +	5 mV	10 mV	13.5 mV	17.5 mV
Current	0.15% +	75 mA	36 mA	25 mA	13 mA
Ripple and noise					
from 20 Hz to 20 MHz					
Voltage rms	300 μ V	300 μ V	450 μ V	1.6 mV	400 μ V
peak-peak	3 mV	4 mV	4.5 mV	5 mV	4 mV
Current rms	30 mA	13 mA	10 mA	5 mA	6 mA
Readback accuracy at 25°C \pm5°C (percent of reading plus fixed) System models only					
Voltage	0.07% +	6 mV	15 mV	20.5 mV	30 mV
+Current	0.15% +	80 mA	40 mA	26 mA	15 mA
-Current	0.35% +	150 mA	55 mA	44 mA	24 mA
Load regulation					
Voltage	1 mV	2 mV	2 mV	3.5 mV	3 mV
Current	6.5 mA	2 mA	1 mA	1 mA	0.5 mA
Line regulation					
Voltage	0.5 mV	0.5 mV	0.5 mV	1 mV	1 mV
Current	2 mA	2 mA	2 mA	0.75 mA	0.75 mA
Transient response time	Less than 100 μ s for the output voltage to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of rated current				
Supplemental Characteristics (Non-warranted characteristics determined by design and useful in applying the product)					
Average resolution					
Voltage	2 mV	5 mV	6.75 mV	12mV	10 mV
Current	18 mA	9 mA	7 mA	4 mA	5 mA
OVP	12 mV	30 mV	30 mV	65 mV	54 mV
OVP accuracy	160 mV	500 mV	400 mV	750 mV	700 mV



Single-Output: 500 W GPIB (Continued)

Ordering Information

- Opt 100** 87 to 106 Vac, 47 to 63 Hz
- Opt 120** 104 to 127 Vac, 47 to 63 Hz
- Opt 220** 191 to 233 Vac, 47 to 63 Hz
- Opt 240** 209 to 250 Vac, 47 to 63 Hz
- * **Opt 908** Rack-mount Kit (p/n 5062-3977)
- * **Opt 909** Rack-mount Kit w/ Handles (p/n 5063-9221)
- Opt 0L2** Extra Standard Documentation Package
- Opt 0B3** Service Manual
- Opt 0B0** No documentation package

* Support rails required

Accessories


- p/n 1494-0059** Accessory Slide Kit
- p/n 1252-3698** 7-pin Analog Plug
- p/n 1252-1488** 4-pin Digital Plug
- p/n 5080-2148** Serial Link Cable 2 m (6.6 ft)
- E3663AC** Support rails for Agilent rack cabinets

Specifications

(at 0° to 55°C unless otherwise specified)

	6654A-J04 Special Order Option	6654A-J05 Special Order Option	6654A-J12 Special Order Option	6655A-J05 Special Order Option	6655A-J10 Special Order Option
Number of outputs	1	1	1	1	1
GPIB	Yes	Yes	Yes	Yes	Yes
Output ratings					
Output voltage	70 V	50 V	80 V	150 V	156 V
Output current (40°C)	7.5 A	10 A	6 A	3.2 A	3 A
Maximum current (50°C/55°C)	6.75 A/6.37 A	9 A/8.5 A	5.4 A/5.1 A	2.88 A/2.72 A	2.7 A/2.55 A
Programming accuracy at 25°C ±5°C					
Voltage	0.06% +	30 mV	26 mV	35 mV	64 mV
Current	0.15% +	7 mA	9 mA	7 mA	3.5 mA
Ripple and noise from 20 Hz to 20 MHz					
Voltage rms	600 µV	500 µV	700 µV	800 µV	900 µV
peak-peak	6 mV	5 mV	7 mV	8 mV	8 mV
Current rms	5 mA	4 mA	3 mA	2 mA	3 mA
Readback accuracy at 25°C ±5°C (percent of reading plus fixed) System models only					
Voltage	0.07% +	50 mV	40 mV	58 mV	100 mV
+Current	0.15% +	6 mA	8 mA	6 mA	2.5 mA
-Current	0.35% +	13 mA	17 mA	16 mA	7.5 mA
Load regulation					
Voltage	4 mV	4 mV	4 mV	6 mV	7 mV
Current	0.5 mA	0.5 mA	0.5 mA	0.5 mA	1 mA
Line regulation					
Voltage	1 mV	1 mV	4.5 mV	2 mV	2 mV
Current	0.5 mA	0.5 mA	0.5 mA	0.5 mA	1 mA
Transient response time	Less than 100 µs for the output voltage to recover to its previous level (within 0.1% of the voltage rating of the supply or 20 mV, whichever is greater) following any step change in load current of up to 50% of rated current				
Supplemental Characteristics (Non-warranted characteristics determined by design and useful in applying the product)					
Average resolution					
Voltage	17.5 mV	15 mV	20 mV	37.5 mV	39.5 mV
Current	1.9 mA	2.75 mA	1.7 mA	8 mA	8 mA
OVP	110 mV	93 mV	130 mV	240 mV	250 mV
OVP accuracy	1.4 V	1.2 V	1.6 V	3 V	3.3 V

INLEC, supporting you to deliver a world class service, every day, in every sector ...

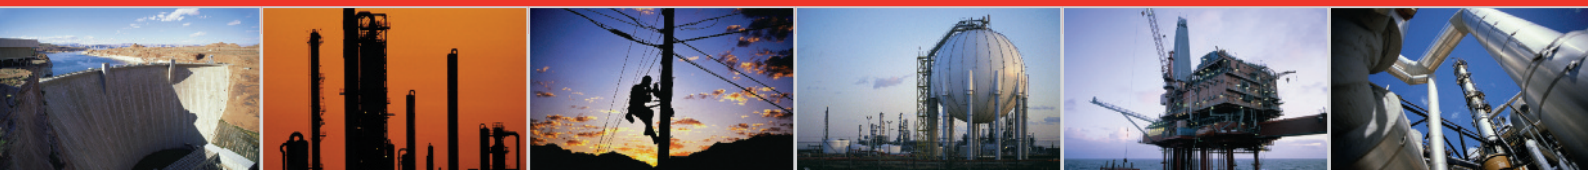

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor