

CASELLA

Guardian2

Guardian2 Multi-Agent Monitoring Station

Guardian2 is designed to help you remain compliant with site emission levels, using remote monitoring and reporting of noise, dust and vibration.

Powered by mains, solar or battery, the Guardian2 is ideal for any location.

www.casellasolutions.com



Guardian2

Key Features

- Real-time particulate, noise and ground vibration (PPV)
- Simultaneous PM10, PM2.5 and PM1.0 monitoring
- Web-hosted data with secure, password protected login
- Optional, maintenance free windspeed & direction sensor
- Email and text alerts to nominated recipients
- Manual or automatic reports
- IEC 61672-1 compliant sound level meter
- Wall or pole mounted
- Powered by mains (100-250VAC), solar or battery

Guardian2 is a web-based remote monitoring system for noise, particulates and ground vibration, either as single 'agents' or in multiple combinations. It is ideal for construction & demolition sites plus many more fence-line applications. Where compliance with limits is required and good relationships with neighbouring people and businesses are a must, Guardian2 can guarantee the smooth progress of your project or manufacturing operations.

mHUB

With the new mHub, data can be streamed straight to your PC...



The Guardian2 advanced mHub datalogger and web connectivity allows data to be continuously sent to the cloud. Alerts and status reports can be seamlessly delivered to your PC.

Data Anywhere with www.casella247.com

The mHUB datalogger incorporates an electronic SIM which means that the system will search for the strongest cellular signal but in the event of a lack of connectivity, the mHUB will continue to log then push the stored data to the server when communication is re-established. The Casella 24/7 Data Management System is accessible via a secure log-in, giving organisational administrators and nominated users access rights to data, reports and alerts.

Plug In and Play

Integrated into a small, unobtrusive environmentally sealed housing, Guardian2 can be configured at the time of ordering for a variety of 'agents' depending upon the specific application or requirements. Installation couldn't be simpler; just bolt to a wall or mount on a pole, apply power and then within a few moments begin transmitting data using cellular connectivity to a secure server.

Configure Reports

- For single or multiple agents at once e.g. noise and dust
- Automatic reports can be set to report daily, weekly or monthly data, direct to your inbox
- Graphical or tabular reports

Alert Configuration

- Configure alerts by text or email
- Can be configured for any measured parameter
- Error alerts, e.g. for power loss


User Configuration

- Different levels of access can be configured to casella247.com
- Specify who just receives reports, or administrator access to configure reports and Guardian2 units
- Configure Guardian2 units on different sites remotely


Reporting and alerts

Administrators can choose the number of Users who have access to data and receive alerts while Users themselves can create and edit reports and because there can be multiple sites and Guardians they can easily switch between them. Reports can be created manually or automatically and can be sent by email to multiple recipients if required. Alerts can be generated when specified limits are exceeded as well as notification of power and communications outages should data not be received when expected by the system. Action can then be taken to investigate the causes of these exceedances to head off potential complaints or citations as well as checking for integrity of the Guardian2 itself.

Report showing PM10, PM2.5 and PM1.0 levels

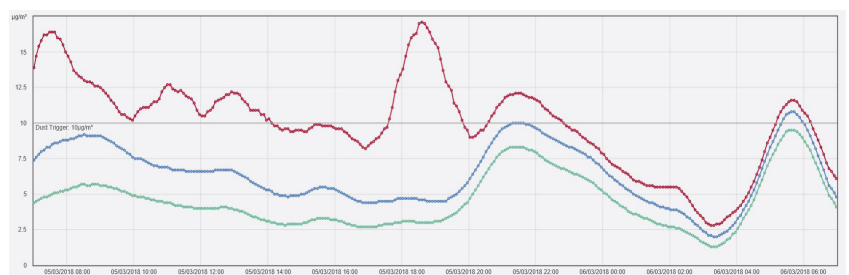

Report showing noise data over two weeks

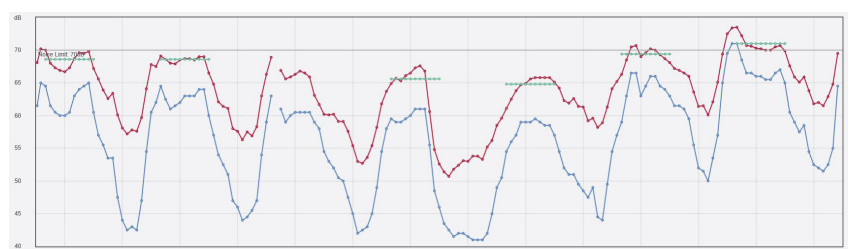

Specification

Noise:

Accuracy: Class 1 to IEC61672-1
 Parameters: L_{Aeq} , L_{Amax} , L_{Amin} , $L_{A10\%}$, $L_{A90\%}$
 Measurement range: 20-140dB RMS
 Calibration: Via optional acoustic calibrator

Particulate:

Sensitivity: $1\mu\text{g}/\text{m}^3$
 Zero stability: $\pm 2\mu\text{g}/\text{m}^3$
 Size fractions: Simultaneous PM10, PM2.5 & PM1.0
 Inlet: Heated to reduce moisture affecting measurements

Vibration:

Transducer type: Geophone outputting PPV and Hz data
 Number of channels: 3-axis
 Frequency range: 2-250 Hz
 Measurement range: ± 200 mm/s
 Resolution: 0.01 mm/s
 Environmental rating: IP65

Wind Speed:


Accuracy: $\pm 2\%$
 Resolution: 0.01m/s
 Threshold: 0.01m/s

Wind Direction:

Accuracy: $\pm 3\%$
 Resolution: 0.1 degrees

General:

Enclosure Protection: IP65
 Operating Humidity: $< 5\%$ to 100%
 Logger: Inbuilt logger data transmission via GPRS
 Mains Power: 100-250VAC
 Mounting: Wall or pole mounted (50mm pole).
 Dimensions: 400mm x 300mm x 150mm
 Weight: $< 13\text{kg}$

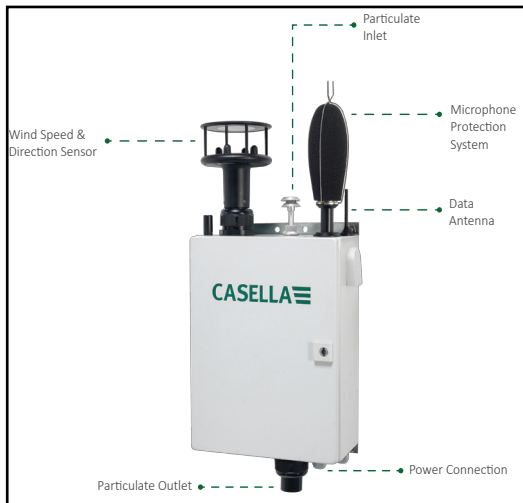

Ordering Information

| Guardian2 - Part Numbers | | | | |
|--------------------------|----------------------------|-------|-----------|-----------------------|
| Part Number | Particulate (PM10 & PM2.5) | Noise | Vibration | Windspeed & Direction |
| 208049D | | | ● | ● |
| 208052D | | ● | ● | |
| 208054D | | ● | | ● |
| 208057D | | ● | | |
| 208061D | | | ● | |
| 208063D | | ● | ● | ● |
| 208170D | ● | ● | ● | ● |
| 208171D | ● | ● | | ● |
| 208172D | ● | | ● | ● |
| 208173D | ● | | | ● |
| 208174D | ● | ● | ● | |
| 208175D | ● | ● | | |
| 208176D | ● | | | |
| 208177D | ● | | ● | |

| Accessories | Part Number |
|--|-------------|
| Replacement windshield enclosure system | 208041C |
| Windshield enclosure system extension kit (includes 5m windshield extension and bracket) | 208104D |
| Spare 5m windshield extension cable | 208083C |
| Replacement foam | 208022C |
| Acoustic calibrator | CEL-120/1 |

| Solar Power Parts | Part Number |
|---------------------------------------|-------------|
| Solar controller & battery enclosure* | 208500D |
| Single solar panel array | 208512D |
| Dual solar panel array | 208511D |
| Triple solar panel array | 208510D |

For details of how many solar panels are required for a specific territory please visit the casella website. Solar panels come complete with mounts for scaffold poles.

| Battery Power Parts | Part Number |
|---------------------|-------------|
| Battery enclosure* | 208503B |
| Charger | CF43 |

Battery will power a Guardian2 for between 5 and 9 days depending on configuration. Two batteries will be required.

| Battery Backup Parts | Part Number |
|--------------------------|-------------|
| Mains/battery enclosure* | 208504D |

Battery will provide backup power in the event of mains failure.

| Battery | Part Number |
|-----------------------------|-------------|
| 12V Leisure battery (130Ah) | B162 |

*Order battery separately

Casella UK, Bedford, United Kingdom

Tel: +44 (0) 1234 844100
 Email: info@casellasolutions.com

Casella China, IDEAL Industries China, Shanghai, China

Tel: +86-21-31263188
 Email: info@casellasolutions.cn

Casella Australia, IDEAL Industries (Aust) Pty Ltd, Melbourne, Australia

Tel: +61 (0)395622684
 Email: australia@casellasolutions.com

Casella USA, Buffalo, USA

Tel: +1 (716) 276-3040
 Email: info-us@casellasolutions.com

Casella India, IDEAL Industries India Pvt.Ltd, Haryana, India

Tel: +91 124 4495104
 Email: casella.sales@ideal-industries.in

Distributed By: