



Datasheet



0370 330 6021

www.sunbeltrentals.co.uk

ART3V Voltage Relay Test System



Features

- 3- ϕ Voltage output from 1- ϕ supply
- 0-450V ϕ -N output voltage
- 20VA/phase maximum output
- Variable Frequency 30-999.99Hz
- Full 360° phase shift ($\pm 180^\circ$)
- Multi-function timing system
- USB data storage and keyboard
- Step change of phase and ROCOF
- Large 6.5" back-lit colour LCD
- Wide input supply range: 90-264V
- Fully Programmable test procedures
- Rugged case with removeable lid
- Weighs under 9kg
- **Suited to testing G59/G99 schemes**

The new ART3V brings new features to our range of relay test equipment making it far more adaptable. The new output voltages are higher and have a finer level of accuracy and control. The new full colour LCD provides more test detail, making it easy to understand. The ART3V user interface is an improvement of the DVS3 mk2 allowing simple testing of complex voltage and loss of mains protection systems.

The ART3V has vastly improved accuracy, stability, and features. Designed to be the trusted and reliable voltage source for relay testing. The ART3V has been designed using the latest digital technology to generate a highly stable and accurate output with very low distortion. Each phase output is individually adjustable for voltage, frequency and phase angle. The unit is controlled by a simple user interface within defined menus. Values may be either typed in at the capacitive keypad or finely varied using a smooth rotary encoder.

Bespoke test procedures can be created for step changes of any output variable at set times or with automatic timing of the response of the relay under test.


The ART3V has a colour back-lit display to provide an easy to read user interface. Menu options are selected by dedicated buttons on the panel, allowing easy mode change. All information is displayed including contact set status, and a phasor diagram.

The ART3V is ideally suited to testing G59 protection, including loss of mains protection. Vector surge and df/dt (ROCOF) relays can be simply tested and timed, as well as other protection requiring one to three voltages, including:

- Under and over frequency relays
- Under and over voltage relays
- Synchronising relays
- ROCOF relays (df/dt)
- Vector surge relays
- Transducers

In conjunction with the ART3C or a current source (such as the 200ADM-P), the ART3V can be used to test protection circuits, including:

- Directional relays
- Distance protection
- Power transducers

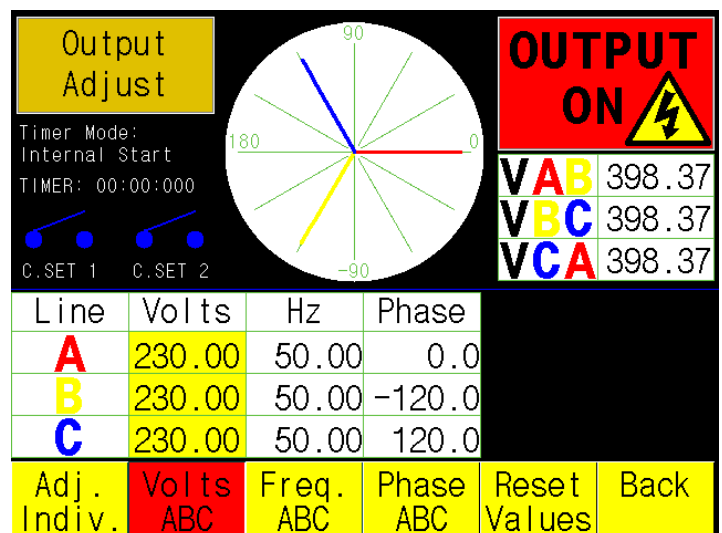

ART3V Specification

Output

The output of the ART3V has 4mm safety sockets for phases A, B, C and neutral. The neutral connection may be omitted for a delta connection. The neutrals can be linked for star connection using the provided accessory.

Voltage	0-450Vac phase-neutral
Current (continuous)	40mA at 450V
Voltage resolution	0.01V phase-neutral
Phase rotation	360° (±180°)
Voltage accuracy	±0.1%rdg+2d

*All output ratings are based on an ambient temperature of 25°C.

Timing System

The timing system on the ART3V is flexible and transparent with different modes of operation. In INTERNAL START mode step changes of any quantity will automatically resets and starts the timer when the change is applied. The timer then stops on a change of state of either contact set. Contacts can be used to trigger the timer based on external relay changes. Also, more complex timing functions are handled by the Fault Config mode.

Two contact inputs are provided, both of which have LEDs and an icon on the display to show the contact state. The contact inputs auto-select for normally open or normally closed contacts. A DC voltage can also be used to trigger the timer using the Vdc contact.

Timer resolution	1ms
Timer accuracy	±0.01%rdg+2d
Contact O/C voltage	24V
Contact S/C current	20mA
Vdc input range	24-240Vdc

USB Data

The ART3V can be connected to a USB keyboard for adding comments to tests. Each test is stored to a USB memory key with each comment. The data is stored in a .CSV format allowing it to be opened in all types of desktop PC spreadsheet software.

Protection and Safety

The ART3V is CE marked and is designed to meet the requirements of BS EN61010, and EMC tested to BS EN 61326. The outputs are protected by overcurrent and thermal trips, and the contact inputs are protected by PTC thermistors. The phase lock current input is fuse protected, and the voltage input is impedance protected. An earth terminal is provided for connection to a local earth.

Supply Requirements

90V-264V 45-65Hz 1ph 300VA max

Temperature Range

Storage -20°C to 60°C Operating 0°C to 45°C

Dimensions

419 x 325 x 195mm

Weight

8.9kg

Accessories

Output lead set and carry case, mains lead, neutral link, spare fuse set, operating manual, USB flash memory key and USB keyboard.

Modes of Operation

Output Adjust

This mode allows full control of frequency, voltage and phase. Each voltage, phase and frequency can be controlled together or independently. All parameters are continuously variable using the adjust control, and step changes of any value may be made. The timer automatically resets and starts when a step change of value is entered, and stops if either contact input changes state. Step changes of phase for testing Vector Surge relays are easily generated in this mode.

Frequency Range	30-999.99Hz
Frequency resolution	0.01Hz
Frequency accuracy	±0.05%rdg+2d
Phase resolution	0.1°
Phase accuracy	±0.3° phase to phase

Phase Lock Mode

The frequency and phase of the output can be controlled by an external reference in phase lock mode. The reference may be the mains supply to the ART3V, or an external voltage or current. This mode allows testing of directional and distance protection in conjunction with an external current source.

Phase lock range	45-65Hz
External voltage ref.	20-250V AC
External current ref.	0.2-5A AC
Phase resolution	0.1°
Phase accuracy	±0.3° phase to phase ±3.0° reference to output

Fault Config Mode

Fault Config mode allows extra flexibility in testing complex timed events or several sets of values that must be applied to a relay in turn. This mode allows three sets of values to be set in advance (pre-fault, fault, and post-fault values). The ART3V may be set to switch from one state to the next on a change of contact or after a specific time. In addition, the timer may be set to start or stop on any one of the state changes or a change of contact state. This mode allows frequency, phase and voltage to be changed simultaneously if required.

df/dt and ROCOF (Rate Of Change Of Frequency)

Loss of mains protection often takes the form of a df/dt relay, sensitive to the rate of change of frequency over time. The ART3V is able to generate a swept frequency output with accurate rates of change of frequency between preset frequencies. The rate of change may be continuously varied to find the relay setting or stepped to time the relay. The output may be set to either sweep continuously or generate single sweeps with timing.

Frequency Range	40-70Hz
Frequency resolution	0.01Hz
ROCOF range	0.001-10.000Hz/s
ROCOF resolution	0.001Hz/s

Lead Set Specifications

1 x 3m 4 core output lead terminated in 4mm plugs
2 x 3m 2 core timer lead terminated in 4mm plugs

Note: Due to the company's continuous research programme, the information above may change at any time without prior notification. Please check that you have the most recent data on the product.
T&R Test Equipment Ltd, 15-16 Woodbridge Meadows, Guildford, Surrey, GU1 1BJ, UK
Tel: +44 (0)1483 207428 Fax: +44 (0)1483 511229 email: sales@trtest.com

We are supporting you to deliver
a world class service, every day,
in every sector...

LOCATIONS

LONDON, HEATHROW

Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ

0333 122 3126

www.sunbeltrentals.co.uk/find-a-depot/london-heathrow

REDCAR

Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ

0370 330 6021

www.sunbeltrentals.co.uk/find-a-depot/teesside

STOKESLEY

Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ

01642 718 900

www.sunbeltrentals.co.uk/find-a-depot/stokesley



www.inlec.com

Order Online with Next Day
Delivery, Online Chat & Online
Account Management



★ Trustpilot

View our trustpilot score



STOKESLEY  REDCAR

 HEATHROW

0370 330 6021

instrumentation@sunbeltrentals.co.uk

testequipment@sunbeltrentals.co.uk

www.sunbeltrentals.co.uk

