INLEC.COM



Nationwide Low Call 0333 6000 600



C.A 6460 C.A 6462

Expertise for Earths

Earth and Resistivity Testers



- 3 testers in one: resistivity, earth, coupling
- Validation of measurement through automatic check: 3 lights indicate the presence of faults liable to impair measurement results
- Heavy-duty on-site case with cover for use on difficult grounds
- Large LCD display with backlighting

pobust and watertight, the C.A 6460 and C.A 6462 are easy-to-use instruments designed specially for use in the field. Wherever you need to install an electric ground connection or certify an existing one, the C.A 6460 and C.A 6462 help you perform accurate, reliable and quick diagnosis while providing the friendliest and safest test environment.

COMPLETE AND WELL-DESIGNED TOOLS

Using the conventional rod-based method, the C.A 6460 and C.A 6462 measure resistivity ("4-wire" connections), ground resistances ("3-wire" connections) and coupling between electrically independent earth electrodes ("4-wire" connections).

They are equipped with 4 color-coded terminals for easy connection and a captive bar for changing from a 4-wire to a 3-wire measurement very quickly and easily.

Plus, the C.A 6462 is fitted with a rechargeable battery with an internal charger.

The measurement result and its unity are read directly on the large, backlit digital screen.

Three lights indicate any defect or interference liable to impair measurement results:

- red flashing FAULT LED (E-H): indicates a fault in the current circuit (voltage at terminals ≥ 30 V peak)
- red flashing HIGH RESISTANCE LED (ES-S): voltage circuit resistance too high (R ≥ 50 kΩ)
- red flashing HIGH NOISE LED (ES-S): voltage circuit noise ≥ 13 V peak

MEASUREMENT AND ERROR DIAGNOSIS

Once the rods have been installed and connected (named E, ES, S and H), begin measurement by simply pressing the push-button. For maximum accuracy, the range and current selection is carried out automatically.


...... VERY SAFE TO USE


When it comes to safety, the C.A 6460 and C.A 6462 meet the strictest of standards.

These instruments are very suitable to severe environments: parasitic voltages, high telluric currents, highly resistive auxiliary connections, etc.




USE / APPLICATIONS:

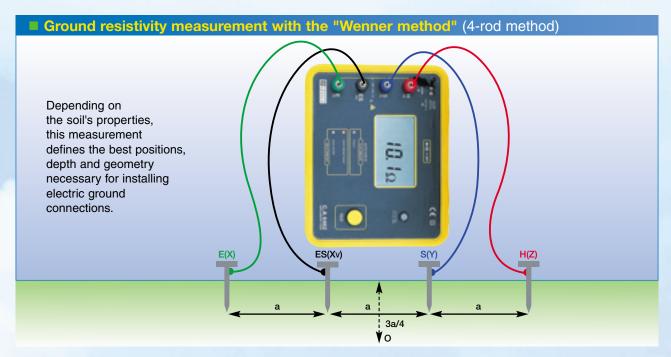

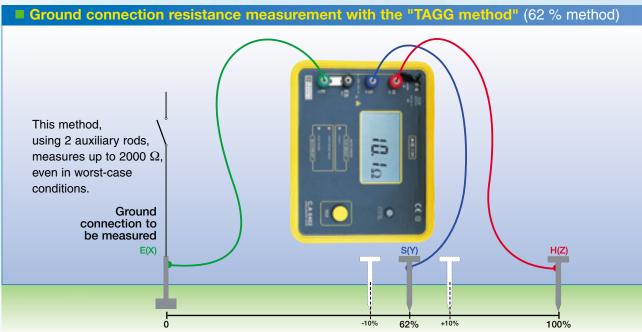

■ Coupling measurement between two earths

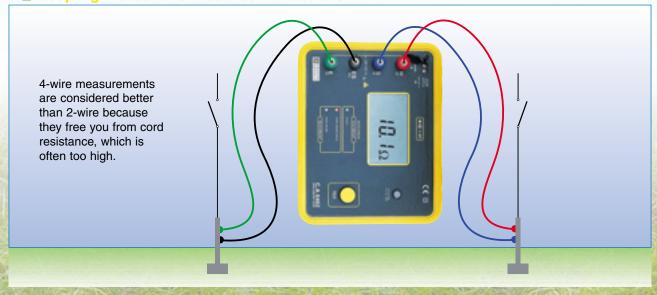

MEASUREMENT CHARACTERISTICS

Measurement from 0 to 2000 Ω within three automatic ranges

Measurement range	Resolution	Test current	Accuracy
0.0019.99 Ω	0.01 Ω	10 mA	±2 % ±1 pt
20.00199.9 Ω	0.1 Ω	1 mA	±2 % ±1 pt
200.01999 Ω	1 Ω	0.1 mA	±2 % ±3 pt

- Measurement frequency: 128 Hz
- Open circuit voltage ≤ 42 V peak

- Conditions for use: -10 °C...+55 °C / 20 %...90 % RH
- Response time: between 4 and 8 seconds depending on measurement conditions

OTHER FEATURES

Power supply

C.A 6460	C.A 6462
8 alkaline 1.5 V LR14 batteries or same-size rechargeable NiMH or NiCd storage batteries	Rechargeable NiMH battery (life: 6 h for a load at 80 %)

Average charge life under permanent control

C.A 6460	C.A 6462	
4,500 measurements of 15 s	1,180 measurements of 15 s	
Watertight IP 53 caseDimensions: 273 x 247 x 127 mm	■ Weight: about 2.8 kg (C.A 6460) and about 3.3 kg (C.A 6462)	

COMPLIANCE TO STANDARDS

Electric safety: double insulation device, according to NF EN 61010 / IEC 61557

EMC: EN 61 000-3, EN 61 000-4

TO ORDER

C.A 6460	C.A 6462
delivered with batteries and user's manual in 5 languages	delivered with 2 m European-type mains supply lead and user's manual in 5 languages
P01.1265.01	P01.1265.02

ACCESSORIES:



Standard Earth / Resistivity Kit P01.1018.23

Shoulder bag with 4 straight rods, 2 extractors, 2 reels (30 m of red cord, 30 m of blue cord), 3 m of green cord, 3 m of black cord and 1 hammer.



Prestige Earth / Resistivity Kit

Compartmentalized rigid bag with space for the tester, including 4 T-rods, 4 reels (100 m of red cord, 60 m of blue cord, 10 m of green cord and 20 m of black cord) and a hammer.

REPLACEMENT PARTS:

- 1.5 V alkaline LR14 battery (pack of 2)
- 9.6 V 3.5 AH NIMH storage battery
- European mains lead
- GB mains lead
- HPC 0.1A fuse (pack of 10)

P01.2960.27 P01.2960.21 P01.2961.74

P01.2970.12

P01.2952.53

 $C \in$

FRANCE Chauvin Arnoux

190, rue Championnet 75876 PARIS Cedex 18 Tel: +33 1 44 85 44 86 Fax: +33 1 46 27 95 59 export@chauvin-arnoux.fr www.chauvin-arnoux.fr

UNITED KINGDOM Chauvin Arnoux Ltd Waldeck House - Waldeck Road MAIDENHEAD SL6 8BR Tel: +44 1628 788 888 Fax: +44 1628 628 099 info@chauvin-arnoux.co.uk

www.chauvin-arnoux.co.uk

MIDDLE EAST Chauvin Arnoux Middle East P.O. BOX 60-154 1241 2020 JAL EL DIB (LEBANON) Tel: +961 1 890 425 Fax: +961 1 890 424 camie@chauvin-arnoux.com www.chauvin-arnoux.com



INLEC, supporting you to deliver a world class service, every day, in every sector ...













OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match quarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from anunbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

9 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist









