

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATASHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

Digital Ground Resistance Tester Model 4500



The Digital Ground Resistance Tester Model 4500 is designed for measuring very low resistance on large grounding systems, such as ground grids and ground mats.

It rejects high levels of interference voltages at DC or 60Hz and its harmonics, and can be used under difficult conditions such as high stray currents or excessive auxiliary electrode resistance without substantially affecting accuracy.

The Model 4500 has three selectable test current ranges (2, 10, 50mA) and five selectable resistance testing ranges (2Ω, 20Ω, 200Ω, 2000Ω and 20kΩ). It is capable of direct readings with a resolution as low as 1mΩ.

With such a wide resistance capability, the Model 4500 is capable of measuring the resistivities of soil and other materials from below 10mΩ-cm to over 1MΩ-cm.

Readings are displayed on a large (0.71"), 3½ digit LCD. The LCD blinks and a pointer on the display lights to warn of excess stray current or auxiliary electrode resistance, or when there is a lack of continuity between leads and electrodes. A beeper will notify the user if voltage greater than 20 volts peak is present between terminals X (C1) and Y (P2) or X and Z (C2) when the ground leads are connected.

The instrument is fuse protected up to 500Aac to protect the instrument against voltage into the test leads.

Power is supplied by a rechargeable 12V battery; the tester may also be operated from an external 12Vdc supply. A battery charge indicator and low battery indicator appear on the LCD and a dual-voltage charging unit is built into the instrument.

The heavy-duty, safety yellow case is dust and water resistant to ensure reliable field use. The cover may be detached while the meter is in use, if desired. Optional test kits are available for ground resistance and soil resistivity tests.

Features

- Fall-of-Potential method
- Measure ground resistance (2- and 3-Point) and soil resistivity (4-Point)
- Step voltage tests and touch potential measurements
- Selectable: three test currents and five resistance ranges
- Measure very low resistance on large grounding systems and grids
- High test current also enables geological surveys
- Large LCD display for easy reading

- Display includes indicators for excess stray current and voltage, high auxiliary rod resistance and fault connection.
- Battery (rechargeable) powered or external 12VDC
- Rugged dustproof and rainproof case
- May be used for continuity tests on bonding

Applications

- Three-point measurement of large grounding grids, counterpoises, ground mats and grounded equipment.
- Soil resistivity tests (4-Point measurement), commonly performed by utilities at proposed construction

sites. Using soil resistivity analysis, the size and complexity of grounding system construction can be evaluated. The Ground Resistance Tester Model 4500 will measure the resistivity of epoxies, cement, ground enhancement materials and many other substances.

- Step or touch potential levels under true fault conditions can be determined by using the Model 4500 to inject a simulated low-level fault into an electrical system. When used in this fashion, the Model 4500 will display readings in volts per fault ampere.
- Two-point tests for continuity tests on bonding or on pre-established grounds.

Specifications

ELECTRICAL					
Ranges	2Ω	20Ω	200Ω	2000Ω	20kΩ
Resolution	1mΩ	10mΩ	0.1Ω	1Ω	10Ω
Resistance Measurement Frequency	128Hz square wave				
Test Current	2mA, 10mA, 50mA				
Accuracy	±2% of Reading ± 1ct from 10% to 100% of range				
Auxiliary Electrode Resistance	Ry: 50kΩ on 20Ω, 200Ω, 2000Ω & 20kΩ ranges; 5kΩ on 2Ω range Rz: 2mA range: 15kΩ; 10mA range: 3000Ω; 50mA range: 400Ω				
Interference	The unit is designed to reject high levels of interference voltages at DC, or 50/60 Hz and their harmonics				
Noise Influence on Accuracy	0.5% of range (max) to 20V peak				
Power Source	Built-in rechargeable 12V, 2 Ah NiCD battery, or external 12 Vdc; low battery indication. Battery can be recharged with built-in dual voltage charging unit: 93 to 123V or 187 to 253V (47 to 450Hz)				
Charging Time	14 hours typical				
Charging Supply Voltage	Internally selectable 110/220V, 45 to 450Hz				
Battery Life	4 hrs on 50mA test current (800 15 sec measurements), 7 hrs on 2mA and 10mA test currents (1500 150 sec. measurements)				
Fuse Protection	500Vrms measurement circuit				
MECHANICAL					
Display	7-segment LCD, 0.71" (18mm) high (3 1/2 digit); 2000-count				
Connection	Terminals accept spade lugs with min. gap of 6mm or standard 4mm banana jacks				
Operating Temperature	14° to 122°F (-10° to 50°C)				
Dimensions	15.75 x 10.2 x 9.8" (400 x 260 x 250mm)				
Weight	14 lbs (6.5kg) approximate				
Case	Heavy-duty plastic, with detachable cover and carrying handle				
Colors	Case: safety yellow; Front panel: brown				
Dielectric Test	2000Vrms, 50/60Hz between 4 interconnected measuring terminals and any external metal ground; 2000Vrms, 50/60Hz between line input and measuring terminals on front panel				
Environmental	O-ring sealed faceplate against water and dust; sealed cover when closed; IEC529, DIN 0470-T1				
SAFETY					
Rating	EN 61010				
Impact Resistance	Shock and vibration according to MIL-T-28800D class 3				
CE Mark	Yes				


Accessories



*Test Kit includes 30 ft lead,
canvas bag, two 500 ft reels,
two 16" auxiliary ground electrodes
Catalog #100.525*



*Test Kit includes two 100 ft leads,
one 16 ft lead, two 16" auxiliary
ground electrodes, canvas bag
Catalog #2130.61*

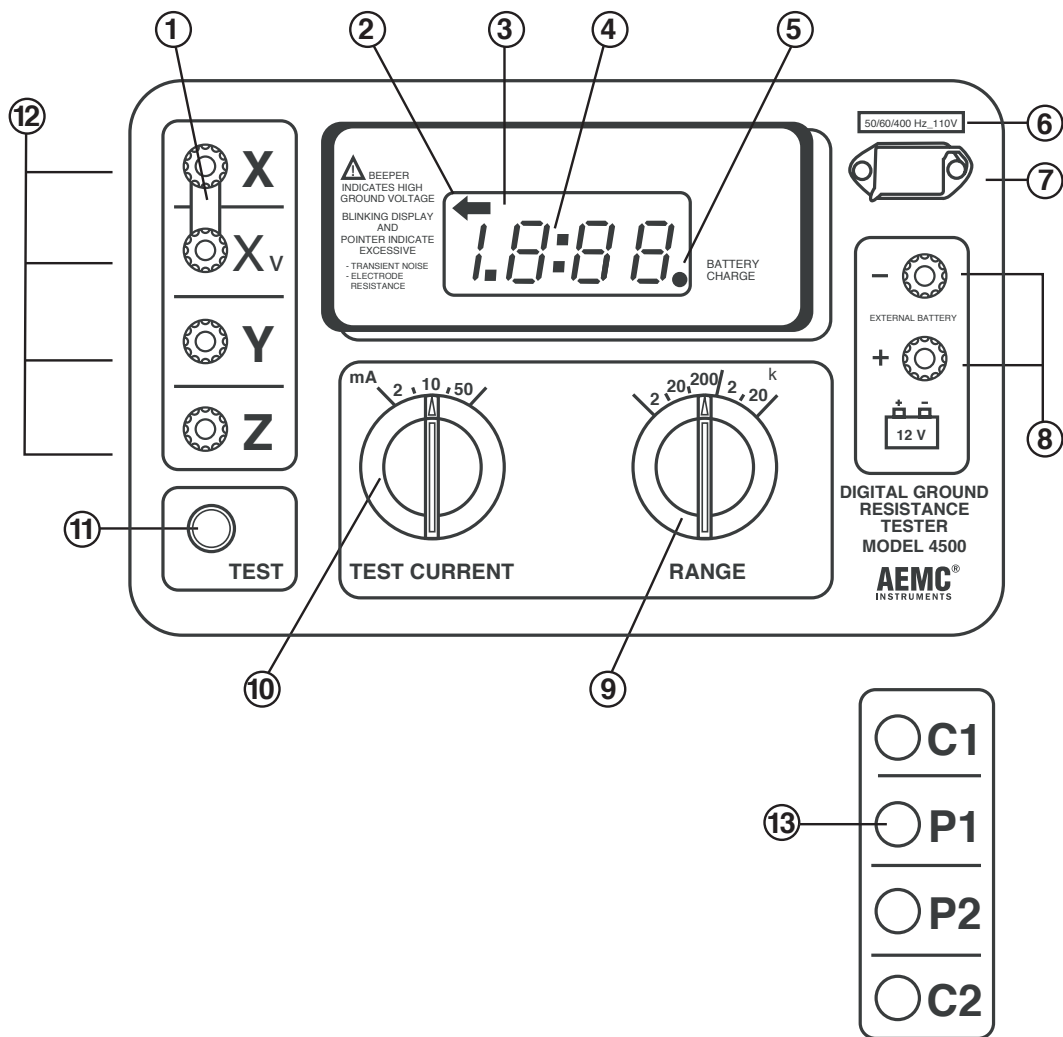

- | | | |
|--|--|---|
| 1. Ground resistance measurement strip | 6. Supply voltage indicator | 11. Push-to-Measure |
| 2. Incorrect measurement indicator | 7. AC power supply input jack | 12. Input Measurement Terminals |
| 3. Display | 8. Connecting terminals for external 12VDC | 13. Adhesive label for C-1, P-1, P-2, C-2 terminal option |
| 4. Low battery indicator | 9. Range selector | |
| 5. Battery change indicator | 10. Test current selector | |

ORDERING INFORMATION

CATALOG NO.


Ground Resistance Tester Model 4500 (4-Point Digital) **Cat. #450.100**
 Includes batteries, AC supply cord and user manual

Accessories (Optional)

Test Kit for Model 4500 includes carrying bag, set of two 500 ft leads on orange reels, one 30 ft lead, two auxiliary ground electrodes. **Cat. #100.525**

Ground Test Kit – 3-Point (supplementa 4-Point) includes carrying bag, two 100 ft color-coded leads, one 16 ft lead and two 16 " auxiliary ground electrodes. **Cat. #2130.61**

INLEC, supporting you to deliver a world class service, every day, in every sector ...

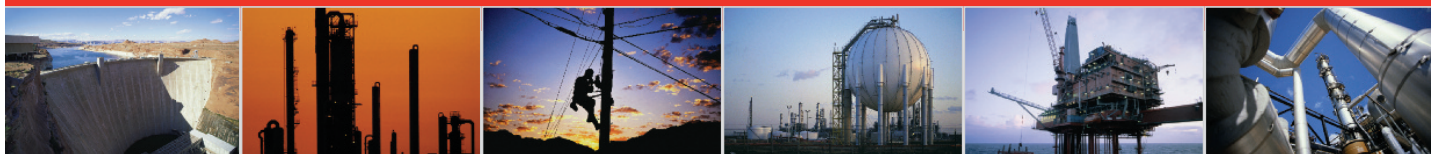

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor