

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

HIGH-PERFORMANCE RATIOMETER



DIGITAL TRANSFORMER RATIOMETER



A powerful ratio tester that stores up to 10,000 test results in internal memory

- Measures turns ratios on power transformers, VT/PTs and current transformers (CTs)
- Direct Turns Ratio readings from 0.8000:1 to 8000.0:1
- Tests performed by exciting the primary and reading the secondary for greater operator safety
- Displays turns ratio, excitation current, winding polarity and % deviation from the nameplate values
- Internal NiMH battery packs provide up to 10 hours of continuous operation
- Display warns of incorrect lead connection, reverse polarity, open and short circuits
- Includes DataView® analysis software

POWERFUL RATIO TESTER

DTR® 8510



The DTR® 8510 is a portable digital transformer ratiometer designed for on-site testing of power, potential and current transformers. When connected to a non-energized transformer, the DTR® accurately measures the primary-to-secondary turns ratio, while simultaneously displaying the polarity and excitation current.

The DTR® 8510 is a second-generation instrument incorporating the latest technology, improving on its highly successful predecessor the DTR® 8500.

The DTR® is fully automatic and uses the IEEE C57.12-90™-2006 test method:

- No user calibration
- No user range selectio
- No hand-cranking
- No tedious balancing required

At each measurement, the DTR® automatically checks for open windings, connections, circuit-breakers, short circuits (excess excitation current), incorrect test lead placement, and reverse polarity.

The DTR® is designed with operator safety in mind. Tests are performed at low voltage and, unlike on other ratiometers, step-down excitation is employed. This method, in conjunction with an integral H/X reverse protection circuit, **guards against the generation of hazardous test voltages.**

Up to 10,000 tests can be stored in the DTR® 8510's internal memory. A large, dual line alphanumeric LCD with adjustable contrast and backlighting guarantees fast, accurate display and day/night readability. Both rugged and reliable, the DTR® 8510 is equipped with an attractive, sealed structural polypropylene case designed to withstand the rigours of field use.

Power is supplied by a built-in NiMH battery charged by an external smart charger.


► FEATURES

- Measures power transformers, VT/PTs and current transformer turns ratios
- Displays turns ratio, excitation current, winding polarity and % deviation from the nameplate values
- Smart/fast battery charger with universal input voltage (100-240V, 50-60Hz) charges batteries in less than 4 hours
- Internal NiMH battery packs provide up to 10 hours of continuous operation
- Tests performed by exciting the primary and reading the secondary for greater operator safety
- Display warns of incorrect lead connection, reverse polarity, open and short circuits
- Easy connection and test setup; no calibration or balancing required
- Large dual display with adjustable contrast ensures clearer visibility in any lighting environment, day or night
- Low battery indicator
- Filter selection to improve test results in electrically noisy environments
- Filter selection to improve test results in electrically noisy environments
- USB port to simplify instrument configuration and downloading of test results
- Includes DataView® analysis software for programming, downloading and storing test data with possibility of report generation


CONSTRUCTION




Simple, concise operation – clear informative data displays




Main display




Easy selection of measurement mode




Display of measurement results



Storage of results in internal memory



Clear indication of connection errors and other problems



Programming and storage of 10 nameplate ratios

SOFTWARE



DataView® Data Analysis and Reporting Software

Configure all functions of the DTR® 8510

- ▶ Display and analyse data on your PC
- ▶ Configure DTR® 8510 functions and parameters from your PC
- ▶ Customize views, templates and reports for your specific needs
- ▶ Create and store a complete library of configurations that can be uploaded to the DTR® 8510 as needed
- ▶ Run tests directly from your PC
- ▶ Print reports using standard or custom templates that you design



DataView® is included with the DTR® 8510

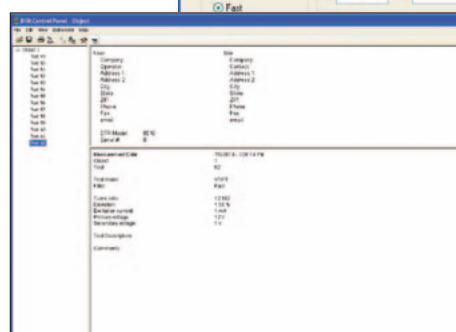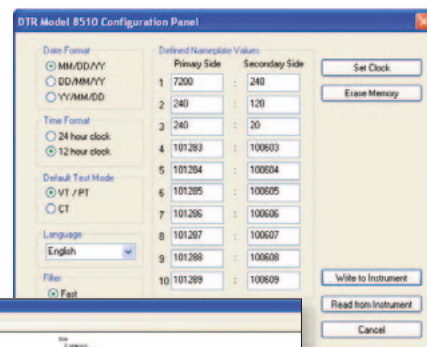



Measurement on a transformer in the workshop



Measurement of the ratio on a current transformer



Measurement on a 2,000 kVA three-phase transformer in the field

SPECIFICATIONS

Ratio Range (VT/PT)	Auto-Ranging : 0.8000 to 8000 :1	
Accuracy (VT/PT)	Ratio Range	Accuracy (% of Reading)
	0.8000 to 9.9999	± 0.2%
	10.000 to 999.99	± 0.1%
	1000.0 to 4999.9	± 0.2%
	5000.0 to 8000.0	± 0.25%
Ratio Range (CT)	Auto-Ranging : 0.8000 to 1000.0	
Accuracy (CT)	Ratio Range	Accuracy (% of Reading)
	0.8000 to 1000.0	± 0.5%
Excitation Signal	VT/PT Mode : 32 Vrms max; CT Mode: Auto Level 0 to 1 A, 0.1 to 4.5 Vrms	
Excitation Current Display	Range : 0 to 1000 mA; Accuracy : ± (2% of Reading + 2 mA)	
Excitation Frequency	70 Hz	
Display	Dual-line alphanumeric LCD, 16x2 characters with contrast adjustment and backlight control. Day/night visible.	
Languages Supported	English, Spanish, French, Italian, German, Portuguese	
Measurement Method	In accordance with IEEE Std C57.12.90™-2006	
Power Source	Two 12V, 1650mAh NiMH rechargeable battery packs	
Battery Life	Up to 10 hrs of continuous operation. Low battery indication.	
Battery Charger	Universal input (90 to 264Vrms input) smart recharger	
Charging Time	< 4 hrs to full charge	
Data Storage	10,000 tests	
Date / Time	Battery-backed, Real-time clock	
Communication	USB. 2.0 compliant, optically isolated, 115.2 KB	
Software	DataView® analysis software included	

MECHANICAL

Dimensions	10.70 x 9.76 x 5.12" (272 x 248 x 130 mm)
Weight	8.1 lbs (3.7 kg)
Connection	XLR connectors
Leads	15 ft (4.6m) H & X shielded with colour-coded crocodile clips
Enclosure	Heavy-duty Polypropylene case, UL 94 V0 rated
Vibration	IEC 68-2-6 (1.5 mm to 55 Hz)
Shock	IEC 68-2-27 (30 G)
Drop	IEC 68-2-32 (1 m)
Index of Protection	IP 40 (Instrument lid open) per EN 60529 : IP 53 (Instrument lid closed) per EN 60529

SAFETY

CE Marking	Yes
Double Insulation	Yes
Safety Ratings	EN 61010-1; 50V CAT IV; Pollution Degree 2

TO ORDER

DTR® 8510 digital transformer ratiometer.....P01157702

Replacement parts

Set of 2 spare leads, length 15 ft (4.6 m) for DTR® 8510 and DTR® 8500.....P01295143A

REFERENCES


FRANCE
Chauvin Arnoux
 190, rue Championnet
 75876 PARIS Cedex 18
 Tél : +33 1 44 85 44 85
 Fax : +33 1 46 27 73 89
 info@chauvin-arnoux.fr
 www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux Ltd
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
 Dewsbury, West Yorkshire - WF12 7TH
 Tel: +44 1924 460 494
 Fax: +44 1924 455 328
 info@chauvin-arnoux.co.uk
 www.chauvin-arnoux.com

MIDDLE EAST
CHAUVIN ARNOUX MIDDLE EAST
 P.O. BOX 60-154
 1241 2020 JAL EL DIB - LEBANON
 Tel: +961 1 890 425
 Fax: +961 1 890 424
 camie@chauvin-arnoux.com
 www.chauvin-arnoux.com

CHAUVIN
ARNOUX
 GROUP

INLEC, supporting you to deliver a world class service, every day, in every sector ...

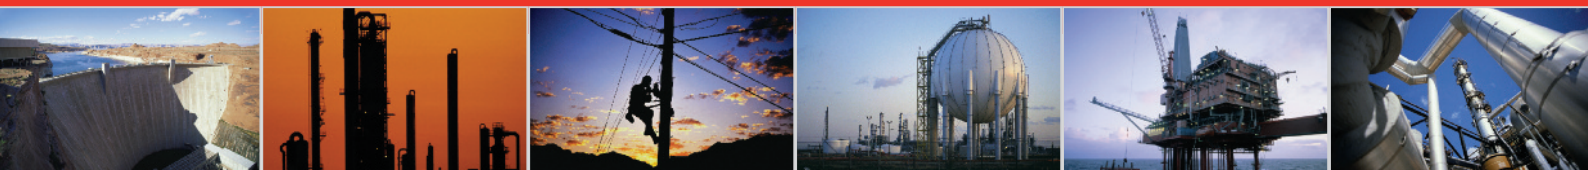

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom

