

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

**INLEC.COM**

# DATASHEET



Nationwide Low Call  
**0333 6000 600**

**WHY BUY**  
WHEN YOU CAN HIRE

# DPI 104

## Druck Digital Test Gauge

### Features

- 0.05% full scale (FS) accuracy
- Pressure ranges to 20,000 psi (1400 bar)
- Eleven selectable pressure units
- Large, easy-to-read display with five-digit resolution
- % pressure indication and additional bar graph for quick visual reference
- Temperature compensated accuracy from 14°F to 122°F (-10°C to 50°C)
- 0 to 5V analog output
- Pressure switch test
- Minimum/maximum, tare and alarm functions
- IDOS compatible and RS232 serial interface
- Free of charge monitoring and control software
- Stainless steel or Inconel pressure cavity for aggressive media



### Applications

- Process monitoring and control
- Test and calibration

The DPI 104 is a microprocessor-controlled digital pressure gauge that combines precision and functionality in a compact, robust and simple-to-use package. The DPI 104 matches advanced silicon sensor technology with several convenient design features, resulting in an accurate, versatile yet affordable digital test gauge. Supplied as a stand-alone process indicator or in a kit with the widely proven Druck hand pumps, the DPI 104 provides a reliable and economic solution for a wide range of pressure sensing applications.



# DPI 104

## Specifications

### Accuracy

0.05% FS including non-linearity, hysteresis, repeatability and temperature effects from 14°F to 122°F (-10°C to 50°C)

### Resolution

Maximum five digits

### Pressure Ranges

Range			Resolution		Maximum Working Pressure	
psi	bar	type	psi	mbar	psi	bar
0-10**	0-0.7	G*	0.001	0.01	11.2	0.77
0-30	0-2	G* or A	0.001	0.1	32	2.2
0-100	0-7	G* or A	0.01	0.1	111.7	7.7
0-300	0-20	G* or A	0.01	1	319	22
0-1000	0-70	G* or A	0.1	1	1117	77
0-3000	0-200	SG	0.1	10	3190	220
0-5000	0-350	SG	0.1	10	5583	385
0-10,000	0-700	SG	1	10	11,165	770
0-15,000	0-1000	SG	1	100	15,950	1100
0-20,000	0-1400	SG	1	100	22,330	1540

\*All gauge models will respond to negative pressures.

\*\*0.15% FS for 10 psi (700 mbar) range.

### Burst Pressure

Burst pressure is 2x working pressure (exception, 20,000 psi (1400 bar); burst pressure 29,000 psi (2000 bar).

### Selectable Pressure Units

kPa, MPa, kg/cm<sup>2</sup>, psi, mbar, bar, inHg, inH<sub>2</sub>O, mH<sub>2</sub>O, mmH<sub>2</sub>O and mmHg

### Display

- Pressure reading: 5 digits with 0.5 in (12.7 mm) character height
- Full scale indicator: 2.5 digits with 0.25 in (6.35 mm) character height

### Pressure Bar Graph

In addition to the numeric pressure indication, the DPI 104 LCD display contains a circular twenty segment bar graph to provide the user with a quick visual estimation of pressure from 0 to 100% full scale output. The bar graph increments represent 5% of the user-selectable range.

### Display Update

Two times per second

### Minimum/Maximum Values

The minimum and maximum pressure values can be displayed on the DPI 104. This function can be enabled/disabled, and reset by the user.

### Switch Test

The DPI 104 features a switch test function that will capture and display the open and closed values from an external pressure switch. Maximum switch impedance 200 Ω.

### Voltage Output

The DPI 104 can be programmed to provide a 0 to 5 V output signal that can be configured as directly proportional to the pressure shown in the display or set to a fixed value. The voltage output mode provides 0.1% FS accuracy from 50 mV to 5 V.

### Alarm Output

The alarm output consists of an open drain field effect transistor (maximum current 250 mA, maximum voltage 24 VDC)

### Adjustable Mounting Positions

For added convenience, the DPI 104 housing will rotate 320° around the pressure fitting and the faceplate can be rotated in any orientation for optimum visibility.

### Menu Lock

To guard against unauthorized menu access, the DPI 104 features a menu and tare lock function

### RS232 Interface

Serial communications are provided to allow transfer of data to a PC with the optional serial lead (IA4090-2-V0). Using this link, all menu commands and display data are available via an ASCII command set or the optional SiCal Pro Software.

### Network Capability

Up to 99 DPI 104 instruments can be connected together in a daisy chain-configured network.

### Universal Pressure Module (UPM) Capability

UPM modules can be connected to the DPI 104 to enhance the accuracy and extend the pressure range.

## Battery

The DPI 104 is supplied with a 9V alkaline battery, type MN1604. Battery life is approximately six months when used daily for one hour per day. For increased performance a 9V lithium battery (not supplied by GE) is suggested.

## Pressure Port

- 1/4 NPT or BSP male for units to 10,000 psi (700 bar)
- 9/16 x 18 UNF male cone connection 15,000 psi (1000 bar) and 20,000 psi (1400 bar) units

## Enclosure

- Case material: ABS/PC plastic sealed to Type 4/IP65
- Wetted parts: All stainless steel (316) or Inconel welded pressure cavity for compatibility with aggressive media.

## European Compliance

CE marked

## SiCalPro Software

This software package allows the user to control the DPI 104 remotely through a virtual instrument panel on the computer screen. The calibration data can be logged, viewed and printed in graphical format or as a calibration certificate. SiCalPro is free to download from the DPI 104 web page at <http://www.ge-mcs.com/en/pressure-and-level/handheld-test-tools/dpi-104-digital-test-gauge.html>

Option (B) PC serial lead required.

Option (A) external power supply recommended.

## System Requirements

Minimum Intel Pentium with Windows® 95 or higher

## General

### Storage Temperature

-4°F to 158°F (-20°C to 70°C)

### Dimensions

*Diameter:* 3.74 in (95 mm) excluding pressure fittings

*Depth:* 2.17 in (55 mm)

### Weight

13 oz (350 g) approximate

### Mechanical Vibration

To Def Stan 66-31, 8.4 Cat III

### Mechanical Shock

To BS EN 61010:2001

### Electrical Environments

- EMC: BS EN61326-1:1998 + A2:2001
- Electrical Safety: BS EN 61010:2001
- Mechanical Safety Pressure Equipment Directive—Class: Sound Engineering Practice (SEP)

## Options

- A) DPI 104 external power supply unit with lead p/n 191-350
- B) PC serial lead for connection to PC p/n IA4090-2-V0. (*Note: Option A is recommended with PC serial lead.*)
- E) Mating plug for eight-pin socket for switch test, voltage output, external power and alarm function (customers wishing to make their own connections/leads) p/n 1S-04-0027
- F) 9/16 x 18 UNF to 3/8 BSP adapter for connection to PV 212 p/n 182-190
- G) DPI 104 UPM power lead for use with UPM IDOS Sensor p/n IA4101-1-V0. Requires Option H.
- H) Universal 12V external power supply for use with the UPM IDOS remote sensor p/n 191-129

## Ordering Information

Please state the following (where applicable)

1. Model DPI 104
2. Pressure range, type (G, A or SG) and pressure connections required.
3. Options, if required. Please order as separate items.

# Pneumatic and Hydraulic Test Kits

The DPI 104 is included as a standard component in these test and calibration kits:

## Low Pressure Pneumatic Test Kit

Includes: DPI 104; ranges to 30 psi (2 bar), PV 210 low pressure pneumatic test pump, hose, adaptors, seal kit and case.



Low pressure pneumatic test kit



Pneumatic test kit

## Pneumatic Test Kit

Includes: DPI 104; ranges to 300 psi (20 bar), PV 211 pneumatic test pump, hose, adaptors, seal kit and case.

## Hydraulic Test Kit

Includes: DPI 104; ranges to 15,000 psi (1000 bar), PV 212 hydraulic test pump, hose, adaptors, seal kit and case.



Hydraulic test kit




Pneumatic and hydraulic test kit

## Pneumatic and Hydraulic Test Kit

Includes: DPI 104; ranges to 10,000 psi (700 bar), PV 411A combined pneumatic and hydraulic test pump, hydraulic reservoir, hose, adaptors, seal kit and case.

## Pressure Range Chart

Code	Pressure Range	Pump options
04	10 psi (700 mbar)	PV210
07	30 psi (2 bar)	PV210
10	100 psi (7bar)	PV211, PV411A
13	300 psi (20 bar)	PV211, PV411A
16	1000 psi (70 bar)	PV212, PV411A
18	3000 psi (200 bar)	PV212, PV411A
20	5000 psi (350 bar)	PV211, PV411A
22	10,000 psi (700 bar)	PV212, PV411A
23	15,000 psi (1000 bar)	PV212

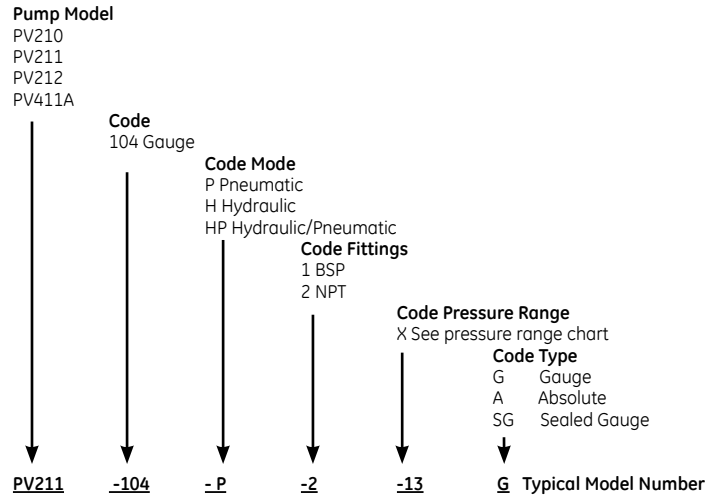

[www.ge-mcs.com](http://www.ge-mcs.com)

920-176D

# INLEC, supporting you to deliver a world class service, every day, in every sector ...



## OUR COMMITMENT TO YOU

### A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

### Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

### Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

### We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

## YOUR 5 WAY GUARANTEE

### 1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

### 2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

### 3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application\*.

### 4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

### 5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

\*subject to availability and conditions

## Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: [www.inlec.com](http://www.inlec.com)

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor