

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATASHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

Features

- Ranges from ± 1.0 to ± 60 in H_2O
- Accuracy 0.05% of span
- Generates pressure and vacuum
- Dedicated tasks and dual readout
- Automatic zero equalization
- RS232 interface and documenting versions

Applications

The DPI 610/615 LP is the ideal reference standard to reduce instrument maintenance time and errors for quality systems compliance.

The DPI 610/615 LP performs dedicated tasks for transmitters, transducers, gauges, micromanometers and switches, and simplify commissioning, maintenance and calibration.

The DPI 610/615 LP is designed to calibrate-in-place for very low pressure sensors.

DPI 610/615 LP Series

Druck Portable Low Pressure Calibrators

DPI 610/615 LP Series is a Druck product. Druck has joined other GE high-technology sensing businesses under a new name—GE Sensing.



GE Sensing

Setting the Standard for Low Pressure Calibrators

The Druck DPI 610/615 LP series incorporates a precision low pressure sensor and pneumatic generation, to provide a fully self contained, portable low pressure calibrator.


The key to the simple operation of the DPI 610/615 LP is the task menu. Specific operating modes such as P-I task sets the calibrator to source pressure and measure mA, and the P-Display task allows indicator readings to be manually entered and recorded, for example, when checking devices such as Magnehelic gauges.

At low differential pressures, even connecting the device under test can induce significant pressure. To compensate for this, an "auto zero" facility is provided that uses an internal solenoid valve to equalize the differential pressure prior to zero correction.

The DPI 610 has data storage and RS232 interface. Data can be transferred directly from the 610 to a PC (into a computer) for analysis, certificate printing and archiving.

The DPI 615 simplifies field use by calculating the device under test error and the pass/fail status, and integrates with calibration management software systems, such as Intecal.

The DPI 615 also has data storage and RS232 interface and has two-way communication for downloading procedures and uploading results.

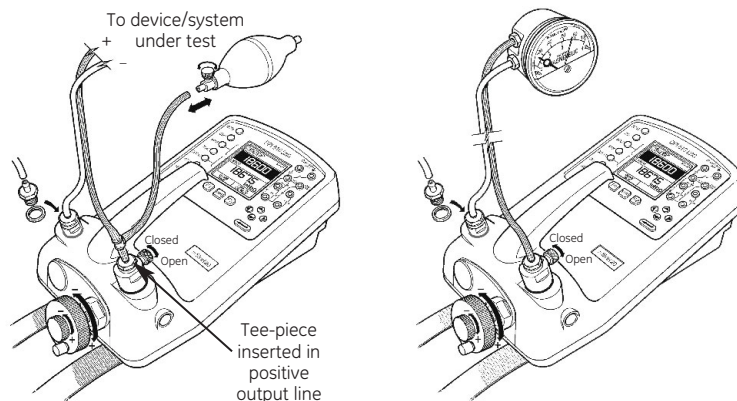

An external squeeze pump is supplied to supplement pressure generation into large volumes.

DPI 610/615 LP Specifications

Pressure

All models include an internal pressure sensor. Up to 10 external sensors can be ordered (option B). Select the internal sensor pressure range from the table below:

Pressure Range in H ₂ O	Accuracy % Span	Max Line Pressure	Max Differential Pressure
±2.5 mbar differential	0.05	5 bar	100 mbar
±12.5 mbar differential	0.05	20 bar	500 mbar
±25 mbar differential	0.05	20 bar	500 mbar
±50 mbar differential	0.05	20 bar	1000 mbar
±75 mbar differential	0.05	20 bar	1000 mbar
±150 mbar differential	0.05	20 bar	1000 mbar

Accuracy

- Non-linearity, hysteresis and repeatability
- Temperature effects ±0.004% rdg/°F (averaged with respect to 68°F)

Stability

<0.1% FS/annum

Calibrator Pressure Ports

2 x 1/8 in female with 1/8 in ID tube adapters

Pressure Media

Non-corrosive gases

Remote Sensor

Model LPE 9400

Specifications and ranges as above. Pressure connection 2 x 1/8 in ID hose adaptor.

Electrical

Input	Range	Accuracy	Resolution	Remarks
Voltage*	±50 VDC	0.05% Reading ±0.004% FS	100 µV maximum	Autoranging, 10 MΩ
Current*	±55 mA	0.05% Reading 0.004% FS	0.001 mA	10Ω, 50 V maximum
Temperature	15 to 105°F	2°F	0.1°F	Local ambient
Switch	Open/Closed			5 mA
Voltage	10 VDC	0.1%		Maximum load 10 mA
	24 VDC	5%		Maximum load 26 mA
Current*	0 to 24 mA	0.05% Reading ±0.01% FS	0.001 mA	

*Temperature coefficient 0.004% reading/°F w.r.t. 68°F.

Electrical Stability

0.03% of reading/annum

Features

Pressure Units

25 scale units plus one user defined

mA Source

Automatic 10 second step cycle and programmable ramp (60 seconds end to end)

Data Logging

Multi-parameter with 10,000 value memory

RS232 Interface

- DPI 610 uni-directional for uploading results to a PC.
- DPI 615 bi-directional for downloading procedures and uploading results

Process Functions

Filter, max/min, tare, flow, % span

Language

English, French, German, Italian, Portuguese and Spanish

Power Management

Auto power off, auto backlight off, battery status indicator

Display

2.4 in x 2.4 in graphic LCD with backlight ±99999 readout, two readings per second

GE Sensing

Environmental

Temperature

- Operating range: 15°F to 120°F
- Calibrated range: 15°F to 105°F

Humidity

0 to 90% non-condensing

Conformity

- EN61010, EN50081-1, EN50082-1
- CE marked

Physical

Weight: 7.7 lb, size 11.8 in x 6.7 in x 5.5 in

Batteries

6 x 1.5 V alkaline C cells (65 hrs nominal use at 20°C)

Options

(A) Spare rechargeable batteries and charger

Rechargeable battery pack (P/N 191-A022) and 110 VAC charger/power supply (P/N 191-A023). A 220 VAC charger/power supply (P/N 191-129) is also available.

(B1) Remote pressure sensors

The range of the DPI 610/615 LP can be extended with up to ten remote pressure sensors. For standard low pressure ranges please refer to specification. For higher range gauge, absolute or differential sensors up to 10,000 psi, please contact GE Sensing. A mating cable is required- see Option (B2).

(B2) Mating cable for remote sensors

A 6 ft (1.8 m) mating cable for connecting remote sensors to the calibrator. At least one cable should be ordered when ordering Option (B1).

Calibration Management Systems

The DPI 615LP is compatible with Intecal calibration management software. Please visit www.gesensing.com for more information and free downloads.

Accessories

Supplied with carrying case, test leads, 0.13 in (3.18 mm) ID hose, user guide, a manual pressure/vacuum squeeze pump and 0.13 in (3.18 mm) ID hose "T" connector and calibration certificate.

Calibration Standards

Instruments manufactured by GE are calibrated against precision calibration equipment traceable to international standards.

Related Products

- Portable field calibrators
- Laboratory and workshop instruments
- Pressure transducers and transmitters

GE manufactures a wide range of pressure transducers and transmitters, including the LP Series of low pressure sensors.

Ordering Information

Please state the following (where applicable):

1. Type DPI 610 LP or DPI 615 LP
2. Integral pressure range
3. Pressure connection 1/8 in NPT female
4. Options
5. Supporting Services (order as separate items)

Option (B1): state the pressure range and pressure connection and order as a separate line item.

Supporting Services

Our highly trained staff can support you, no matter where you are in the world. We can provide training, nationally accredited calibration - both initially and at periodic intervals - extended warranty terms, maintenance and even rental of portable or laboratory calibrators. Further details can be found in www.gesensing.com/productservices/service.htm



©2008 GE. All rights reserved.
920-108C_E

All specifications are subject to change for product improvement without notice. GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.

www.gesensing.com



INLEC, supporting you to deliver a world class service, every day, in every sector ...



OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor