

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

elcometer® **506 Pull-Off Adhesion Tester**

Can be used in accordance with :

ASTM D4541, ASTM D7234, AS/NZS 1580.408.5, BS 1881-207, DIN 1048-2, EN 12636, EN 13144, EN 1348, EN 1542, EN 24624, ISO 16276-1, ISO 4624, NF T30-606, NF T30-062



The **Elcometer 506 Adhesion Testers** are lightweight, portable and easy-to-use adhesion gauges available in analogue or digital versions and are suitable for measuring the pull-off adhesion of coatings up to 50MPa either on-site, or in the laboratory.

The design of the **Elcometer 506 Adhesion Tester** ensures that a uniform force can be easily applied throughout the range by smoothly rotating the gauge's crank handle, ensuring repeatable results to an accuracy of $\pm 1\%$.

The **Elcometer 506 Adhesion Tester** quick connect coupling allows the simple attachment of 14.2mm, 20mm or 50mm diameter dollies which, together with a wide range of accessories, allows coating adhesion testing on flat, curved, thick and thin substrates - including metal, wood, concrete and other fibrous materials.

The **Elcometer 506 Adhesion Tester** test head (actuator) has been designed to be small, ergonomic and lightweight – ideal for single handed testing of coating adhesion even in awkward or confined spaces.

Safe testing on vertical surfaces has also been considered. Using the magnetic clamp accessory the actuator is held securely - preventing accidental damage to the surrounding areas.

Features

Powerful

- Suitable for use on metal, wood, concrete and other substrates
- Rugged & lightweight - ideal for frequent testing
- Smooth load application up to 50 MPa

Flexible

- Easy to use hand-held design
- Ideal for laboratory and field use
- 14.2, 20 and 50 mm diameter reusable dollies
- Measures on small, curved and flat surfaces

Accurate

- Measurement range up to 50 MPa with an accuracy of $\pm 1\%$ of full scale

Durable

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP65
- Suitable for use in harsh environments



BAMR (Pty) Ltd, PO Box 23973, Claremont, 7735, South Africa
Ph : 27 (0)21 683 2100, Fax : 27 (0)21 674 1485
Email : sales@bamr.co.za, Web : www.bamr.co.za

Testing coatings on concrete & low bond strength substrates

When testing coatings on low bond strength substrates such as concrete, wood or other fibrous materials, a larger surface area of dolly is required to improve accuracy, repeatability and reproducibility.

The **Elcometer 506 Concrete Adhesion Tester** can be supplied as a kit or with individual 50mm accessory items (skirt, dolly, cutter) which can be added to existing Elcometer 506 gauges.



Technical Specifications

Part Number	Description			
F506-20A	Elcometer 506 Analogue Adhesion Tester Kit; 20mm			
F506-20AC	Elcometer 506 Analogue Adhesion Tester Kit; 20mm - Certified			
F506-20D	Elcometer 506 Digital Adhesion Tester Kit; 20mm			
F506-20DC	Elcometer 506 Digital Adhesion Tester Kit; 20mm - Certified			
F506-50A	Elcometer 506 Analogue Adhesion Tester Kit; 50mm			
F506-50AC	Elcometer 506 Analogue Adhesion Tester Kit; 50mm - Certified			
F506-50D	Elcometer 506 Digital Adhesion Tester Kit; 50mm			
F506-50DC	Elcometer 506 Digital Adhesion Tester Kit; 50mm - Certified			
Accuracy	±1% of full scale			
Pressure Rating	26 MPa (3800 psi)			
		14.2mm Dolly	20mm Dolly	50mm Dolly
Operating Range		4 to 50 Mpa	2 to 25 Mpa	0.3 to 4 Mpa
Scale Resolution		Analogue: 0.2 Mpa Digital: 0.01 Mpa	Analogue: 0.1 Mpa Digital: 0.01 Mpa	Analogue: 0.05 Mpa Digital: 0.1 Mpa
Instrument Length		290mm	290mm	290mm
Actuator Height (skirt fitted)		85mm	85mm	110mm
Instrument Weight		1.8kg	1.8kg	2.0kg
Kit Weight		4kg	4kg	5.2kg
Battery Type	2 x LR6 (AA) alkaline dry batteries (digital gauge only) Battery Life: 2000 hours			
	When using the analogue gauge with 14.2mm dollies, multiply the 20mm dolly scale reading by 2.			

Packing List


20mm Kit	50mm Kit
Elcometer 506 Adhesion Tester	Elcometer 506 Adhesion Tester
20mm dollies (x10)	50mm dollies (x6)
standard skirt for 20mm dollies	standard skirt for 50mm dollies
20mm dolly cutter handle	50mm dolly cutter arbor
20mm dolly cutter	50mm dolly cutter
Araldite standard two part epoxy adhesive (2 x 15ml tubes)	
Abrasive pad	
carry case	
2 x LR6 (AA) batteries (Digital Gauge only)	
test certificate	
operating instructions	

Accessories

Dolly Diameter	Pack of 10 or 4 (50mm in 4)	Pack of 100	Standard Skirt	Thin Substrate Skirt	Dolly Cutter Handle	Dolly Cutter
14.2mm	T5060014AL-10	T5060014AL-100	T5061420S	T5060014T	T5061420H	T5060014CT
20mm	T5060020AL-10	T5060020AL-100	T5061420S	T5060020T	T5061420H	T5060020CT
50mm	T5060050AL-4	-	T5060050S	-	T5060050H	T5060050CT
Part Number	Description					
T50623797	Magnetic Anchor Clamp - holds actuator securely during tests on vertical surfaces					
T99912906	Araldite Standard Two Part Epoxy Adhesive, 2 x 15ml Tubes					



How to Prevent Adhesive and Cohesive Failures

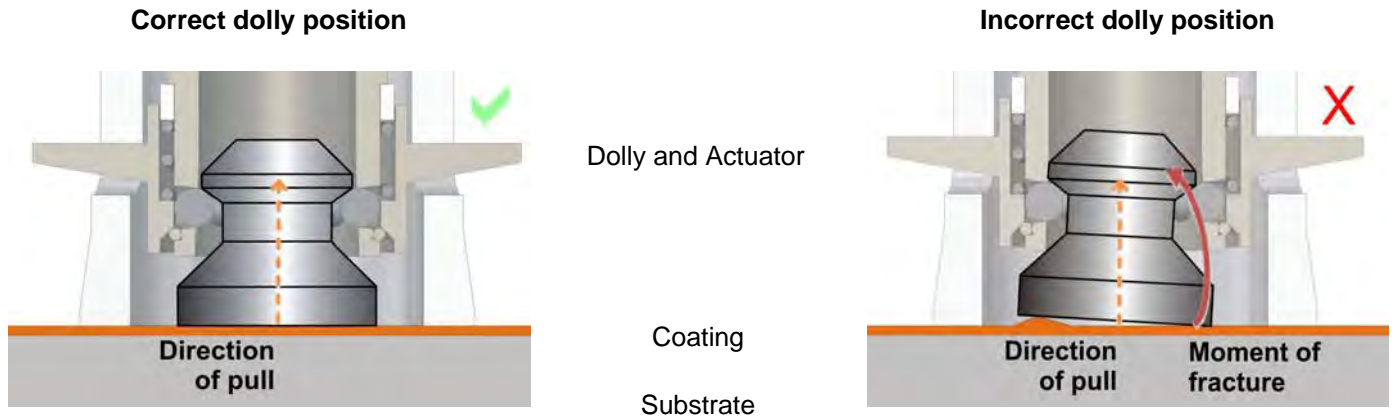

Preparing the surface and dolly

1. Select an appropriate test area which is flat and has sufficient test area to attach the adhesion gauge.
2. Abrade the dolly and surface, clean both to remove any dust - minimising the risk of an 'adhesive' failure.

Fixing the dolly

3. Mix the adhesive correctly and apply a uniform adhesive film over the entire dolly face.
4. Test Standards require that the dolly is pulled off perpendicularly to the test surface. The dolly must therefore be adhered on to a prepared flat test surface (see images above). Apply an even pressure to the dolly to ensure that the dolly face is parallel to the test surface.
5. Remove any excess adhesive from around the dolly and allow to fully cure. Tape maybe required when applying dollies to vertical surfaces during the cure process.
6. If required, once the dolly has fully cured, score the coating around the dolly using the dolly cutter provided.
7. Attach the gauge actuator to the dolly and begin test.

Assessment of the Adhesion Test

For a valid pull test the coating must cover at least 50% of the area of the dolly face. If the glue fails and no coating is present on the dolly, or it covers less than 50% of the dolly face area, the pull-test is invalid and should be repeated.

When the coating has failed within the layer leaving the same coating on both the dolly and the test panel it is known as a 'cohesive failure'.

'Adhesive failures' occur when either the coating has failed at the interface with another coating (leaving a coating on the dolly and another coating on the substrate), or when the coating has failed at the substrate (leaving the coating on the dolly and the substrate is bare).

NOTE: If the glue fails at a value above the specification then it can be reported that the adhesion exceeded the specification for this individual test.



INLEC, supporting you to deliver a world class service, every day, in every sector ...



OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor