

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

NEW

Hand-Held Core-Alignment Fusion Splicer




S178A ver.2 NEW features

The S178A Hand-Held Core-Alignment Fusion Splicer has been enhanced and updated to version 2. The battery is automatically charged internally when connected to AC mains power even during operation. The new illumination lamp lights up a wide area around the V-grooves and helps operation in low light environment. The redesigned and strengthened heater simplifies the protection sleeve loading process.

Features and applications

The S178A is fast and durable, it continues the FITEL tradition of quality and excellence by delivering precise and accurate splices even under rigorous field conditions.

The S178A is equipped with a core alignment system that can complete a splice in 7 seconds (semi-auto mode) and an integrated heater which can shrink a protection sleeve in 25 seconds (pre-heat mode). The USB 2.0 mini interface speeds up PC communication and image / video transfer, whilst enhancing reliability.

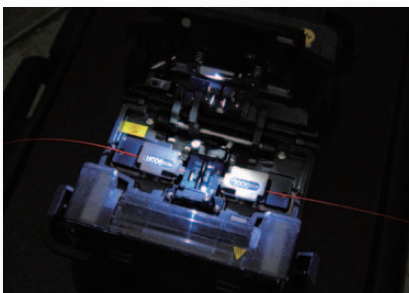

Although the S178A is significantly smaller and lighter in weight than previous models, its canopy design, durable metal body frame and rubber protection corners provide robust protection. This enables use in demanding environments without compromising splicing performance. Along with its rugged durability, the splicer also offers convenience. An internal battery system allows up to 200 splicing cycles (splicing/heating) and an innovative, mirror-free alignment system reduces maintenance work.

The S178A is a versatile choice for a wide range of applications including FTTx, LAN, backbone, enterprise, long-haul installations, data-center and OEM. It is an excellent option for use in the conventional telecommunications industry, along with other industries (including oil and gas and outside broadcast).

Key features

- NEW Internal battery charging**
- NEW Illumination lamp** lights up a wide area around V-grooves
- NEW User friendly LCD display** offers 4 different X/Y image layouts
- NEW Simplified splice result indicator** red / green icon
 - **Rugged and compact handheld design** to endure harsh environmental conditions
 - **Fast splice (7 sec)** at super low loss and **Fast Heating (25 sec)^{*1}**
 - **200 cycles (Splicing & Heating)** with Internal batteries^{*2}
 - **Splice programs available for All METRO/LAN/FTTx fibers** including ultra bend-insensitive fibers (e.g. EZ-Bend™)
 - **Splicer is compatible with the Seikoh Giken and Diamond Splice-on-connector (SOC)**
 - **Easy maintenance** electrode replacement /mirror free alignment system
 - **Easy Software upgrade** via the Internet
- NEW Simplified program fusion and heater programming**
 - **Easily exchanged fiber holder systems** (Tight holder/Removable fiber holder/SOC holder)
 - **PC interface software** to allow user manage splicing recipes and splicing results
 - **Auto-start** heater oven option
- NEW Improved GUI** enhancing ease-of-use
 - **Large memory** for storing 2,000 splice records and last 100 splice result images
 - **RoHS compliant**

^{*1} By using semi-auto mode for splicing and pre-heating mode for heating.

^{*2} By using 2-batteries, semi-auto mode for splicing and regular mode for heating.

Under Tough Environment

S178A passed criteria as below ^{*3};

- **Drop Resistance** - 76 cm Drops from 5 different angles
- **Water Resistance** - IPX2 rating drip proof ^{*4}
- **Dust Resistance** - IP5X rating dust proof ^{*5}

^{*3} Above tests were performed at Furukawa Electric Co., Labs, and do not guarantee that the machine will be undamaged under these conditions.

^{*4} IPX2 rating drip proof means that the machine can be exposed to 3 mm/min drip from 4 different angles with 15° tilt for 2.5 min each and still functions.

^{*5} IP5X rating dust proof means that the machine can be exposed to dust particles with a diameter of 0.1 to 25 µm for 8 hours and still functions.



FITEL Splicer SOC partners



Drop Resistance



Water Resistance



Dust Resistance

SPECIFICATIONS

Applicable Fibers	SM, MM, DSF, NZD, EDF, BIF/UBIF (Bend insensitive fiber)
Cladding Diameter	80~150 μm
Coating Diameter	100~1,000 μm
Fiber Cleave Length	5~16 mm
Average Splice Loss	SM: 0.02 dB, MM: 0.01 dB, DSF: 0.04 dB, NZD: 0.04 dB
Splice Time	7 seconds (semi-auto mode) 9 seconds (regular mode)
Heat Time	25 seconds* ⁶ (S922: 40 mm Sleeve, S921: 60 mm Sleeve) (Pre-heat mode) 31 seconds* ⁶ (S922: 40 mm Sleeve, S921: 60 mm Sleeve) (regular mode)
Splice Programs	Max. 150
Automatic Splicing Selection	SM: SM, DSF, NZD, BIF/UBIF, MM: MM
Heat Programs	Max. 18
Automatic Heating Start	Available
Applicable Sleeves	20/40/60 mm
Fiber Holding	Tight holder (Loose tube applicable) or Removal Fiber Holder System
Tension Test	1.96 N
Return Loss of Splice	60 dB or greater
Attenuation Splice Function	Intentional high splice loss of 0.1 dB to 10 dB (0.1 dB step) can be made for an inline fixed attenuator
Fiber Image Magnification	304X, 608X
Splice Memory	Max. 2,000
Image Capture Capacity	Last 100 images to be automatically captured + Up to 24 images to be stored permanently
Dimension	127W \times 199D \times 105H mm (not including shock absorber) 159W \times 231D \times 130H mm (including shock absorber)
Weight	1.9 kg (without battery) 2.3 kg (with two batteries)
Monitor	3.5" color LCD monitor
Data Output	USB ver.2.0 mini
Battery Capacity	Typical 80 splice/heat cycles with single battery* ⁷ Typical 200 splice/heat cycles with 2 batteries* ⁸
Altitude	5,000 mh
Wind Protection	Max. wind velocity of 15 m/s.
Operating Temperature	-10 to +50°C (0 to 95% Relative Humidity [Non-Condensing])
Storage Temperature	-40 to +60°C (0 to 95% Relative Humidity [Non-Condensing])
Humidity	0 to +95% RH (non-condensing)
Power Source	AC Input 100 to 240 V (50/60 Hz), DC Input 11 to 17 V without any change of hardware

*⁶ The first heating after turning on the power can be longer than the usual heating time.

*⁷ The number of the splicing and heating the machine can produce using a fully charged brand new battery at room temperature of 20°C, semi-auto mode for splicing and regular mode for Heating. Depending on the condition of the batteries and operation environment, the number can vary.

*⁸ The number of the splicing and heating the machine can produce using 2 fully charged brand new batteries at room temperature of 20°C, semi-auto mode for splicing and regular mode for Heating. Depending on the condition of the batteries and operation environment, the number can vary.

STANDARD PACKAGE

Item	P/N	Quantity
① S178A Main Body	S178-A-A-0001	1
② Hard Carrying Case	HCC-01	1
③ Battery Pack Depending on the package	S943B	1 or 2
④ Spare Electrodes	S969	1pair
⑤ AC Adaptor for S178A and S958C	S976A	1
⑥ AC Cable Cord	—	1
⑦ Electrode Sharpener	D5111	1
⑧ Cleaning Brush	VGC-01	1
⑨ Tool case	TCC-01	1
User Manual	FTS-B405	1



OPTIONAL COMPONENTS

Item	P/N	Quantity
① Soft Carrying Case	SCC-01	1
② Battery Charger	S958C	1
③ AC Adaptor for S958C	S977A	1
④ Cooling Tray	CTX-01	1
⑤ Angled Stand	AGS-01	1
⑥ Working Belt	WBT-01	1
⑦ USB Cable	USB-01	1
⑧ Car Cigarette Cable	CDC-01	1
⑨ Tripod Adapter	TPA-01	1
⑩ Tight Holder		
16 mm Cleave length	S712T-016	1pair
10 mm Cleave length	S712T-010	1pair
⑪ Removal Fiber Holder		
160 μm coating diameter fiber	S712S-160	1pair
250 μm coating diameter fiber	S712S-250	1pair
500 μm coating diameter fiber ^{*9}	S712S-500	1pair
900 μm coating diameter fiber	S712S-900	1pair
Loose Tube Fiber (Left side)	S712S-LT-L	1
Loose Tube Fiber (Right side)	S712S-LT-R	1
⑫ SOC Holder		
<For Ferrule>		
Seiko Giken FC/SC connector (9 mm)	S712C-SGS9-L	1
Seiko Giken FC/SC connector (5 mm)	S712C-SGS5-L	1
Seiko Giken LC connector (9 mm)	S712C-SGL9-L	1
Seiko Giken LC connector (5 mm)	S712C-SGL5-L	1
Diamond E-2000™/F-3000™ LC/SC connector	S712C-DM25-L	1
<For Cordage>		
Seiko Giken Cordage (5 mm)	S712C-SGC5-R	1
Seiko Giken Cordage (9 mm)	S712C-SGC9-R	1
Diamond Cordage (5 mm cleave, 1.8~3 mm cordage)	S712C-DMC5-R	1
<Tool>		
Diamond Mount	WTX-01	1
Smart Fuse	SF-01	1
Software Interface for Machine		

*9 Used for 400-500 μm cladding diameter fiber.



⑤ Angled Stand in Action



⑥-1 Working Belt in Action



⑥-2 Working Belt in Action

ORDERING NUMBER FORM S178A-(X1)-(X2)

Category	Code	Remark	
X1	Fiber Holder Type	1 16 mm Tight Holder S712T-016 2 10 mm Tight Holder S712T-010 3 Fiber Holder System	
	X2	Number of Battery Pack (S943B)	1 1 pack 2 2 packs

The Furukawa Electric Group strives to develop environmentally considerate products.



eFriendly Logo Mark

This logo mark indicates that the products and services satisfy the standards of environmentally friendly products of the Furukawa Electric Group.



Our Group has configured the environmental management system at each of our plants worldwide, and acquired ISO14001 certification.

Contact Us:

Furukawa Electric Co., Ltd.

Head Office:

2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo,
100-8322, Japan
TEL: + 81 3 3286 3227
FAX: + 81 3 3286 3978
www.furukawa.co.jp
comsales@ho.furukawa.co.jp

Europe:

Furukawa Electric Europe, Ltd.

3rd Floor, Newcombe House
43-45 Notting Hill Gate,
London W11 3FE U.K.
TEL: + 44 20 7313 5320
FAX: + 44 20 7313 5310
www.furukawa.co.uk
splicers@furukawa.co.uk

North & South America:

OFS Fitel, LLC

2000 Northeast Expressway
Norcross, Georgia 30071, U.S.A
TOLL FREE: + 1 866 452 9516
TEL: + 1 678 783 1090
FAX: + 1 678 783 1093
www.ofsoptics.com
splicers@ofsoptics.com

China:

Furukawa Shanghai, Ltd. Beijing Branch

1001A, Full Tower, No.09 Dong-
sanhuan ZhongRoad, Chaoyang
District, Beijing 100020, P.R. China
TEL: + 86 10 8591 0608
FAX: + 86 10 8591 0609
www.furukawa-sh.cn

South East Asia:

Furukawa Electric Singapore Pte. Ltd.

10 Anson Road, #25-08
International Plaza, Singapore
079903
Tel: + 65 6328 9870
Fax: + 65 6224 2362
comms@furukawa.com.sg

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.

Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.


* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FTEL products without prior notification.

* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

AC2T-120025

JE-205 2D5 TR 200

INLEC, supporting you to deliver a world class service, every day, in every sector ...

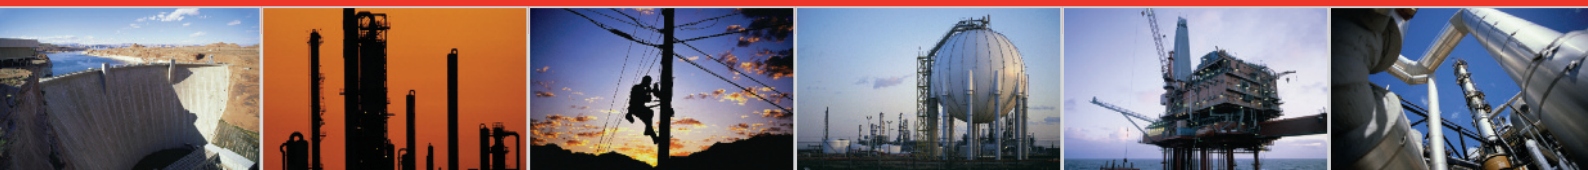

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor