

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

INLEC™

TEST EQUIPMENT

HIRE THIS PRODUCT NOW**WWW.INLEC.COM**

FREEPHONE 0800 052 1110

Fluke 6200 and 6500

Test more appliances per day

The Fluke 6200 and 6500 PAT testers verify the electrical safety and operation of portable appliances in accordance with relevant guidelines and regulations. With powerful auto test capabilities and simplified controls – including 'one touch' test routines – they increase the number of tests you can perform per day without compromising results.

Lightweight all-in-one PAT testers

The new Fluke PAT testers are designed and built with same rugged reliability as all Fluke test and measurement instruments. Lightweight (appr. 3 kg) and compact, they will withstand the tough demands of working in the field. Packed with all the features you need for testing portable appliances on-site, Fluke PAT testers provide a complete all-in-one solution.

A choice of automatic and manual PAT testers

The user-friendly Fluke 6200 and 6500 PAT testers perform all the tests required for class I and class II appliances. Both models conform to safety standard EN61010. For manual testing and low volume applications, choose the cost-effective 6200 PAT model. If you need a more powerful instrument to test large numbers of appliances, the 6500 is the right choice with its wide range of pre-set tests, Compact Flash memory for storing and transferring test results and professional test modes.



6200

- Dedicated key for each test for 'one-touch' testing
- Pre-set pass/fail levels to save time
- Large backlit display for easy reading
- Single mains socket for appliance connection
- Separate IEC socket for easy mains/extension lead testing
- Detachable test leads for quick field replacement
- Integral carrying handle



6500

As 6200 but also with:

- Integral QWERTY keyboard for rapid data entry
- Additional Compact Flash memory card for back-up data storage and transfer to PC
- Large backlit graphics display
- Pre-set, auto-test sequences for user convenience
- Integral site, location and description codes for faster data processing
- Memory review facility for more on-site control

Fluke simplifies portable appliance testing

Compact and lightweight...

- Efficient to work with and easy to carry around– and has extra space in the hard case for accessories

One touch simplicity...

- Pre-set and user-definable test routines are initiated from a single button – to speed up test procedures and save you time on site

A better way of working...

- Rapid data entry via a QWERTY keyboard (or optional Fluke barcode scanner) and fast data transfer from the main memory or the Compact Flash memory card (6500)



Separate hard case

The compact Fluke PAT testers are supplied with a hard carrying case that not only offers protection during transit but also includes extra storage space for accessories and other tools. They're extremely light, weighing approximately 3 kg (without case) and have integral carrying handles for extra convenience.

Performs all PAT tests

Suitable for testing both 230 V and 110 V appliances, the 6200 and 6500 models run all the required safety tests:

- Earth bond low (low/high current)
- Insulation 500 V
- Leakage (PE current, touch current, substitute current)
- Can test 110 V appliances (earth bond, insulation) via the 110 V adapter (Fluke TA700)



INLEC™

TEST EQUIPMENT

HIRE THIS PRODUCT NOW

WWW.INLEC.COM


FREEPHONE 0800 052 1110

Earn more per test

The latest generation Fluke 6200 and 6500 instruments have been designed to enable you to work more efficiently – and therefore faster – without compromising on your own safety or your customer's. Increase your productivity thanks to:

Fast professional testing mode

The professional testing mode enables you to conduct more tests faster and more efficiently than ever before.

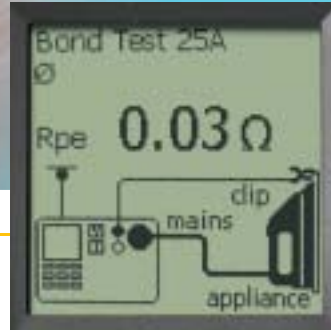

Rapid data entry (6500)

With a full QWERTY keyboard, alphanumeric data entry is faster, easier and more convenient. The integral site, location and description codes further speed up data entry on site, and contribute to more efficient testing and results management.

Data can also be entered using the Fluke barcode scanner (Fluke SPSCAN 15).



Double memory (6500)

The 6500 stores in excess of 1000 test results in its main memory. These can be written to the Compact Flash card for back-up.

A Compact Flash memory card stores alphanumeric data and test results using ultra-reliable solid-state memory. The card can be sent to the office for generating customer reports* while the instrument continues with another card in the field. The 6200 has a built-in internal memory for storing results for use in reports.



One-touch testing


Tests are selected on the 6200 and 6500 with just one button. This greatly simplifies testing.



* using optional Fluke PowerPat Plus software

Designed for long life and high throughput

The introduction of the Fluke 6200 and 6500 PAT testers represent a significant step forward in the practice of appliance safety testing and reporting. Via its subsidiary companies, Fluke has acquired many years' experience in providing PAT testing solutions. The ergonomic and easy-to-use design of the new 6000 Series PAT testers embraces all of this experience to bring you the best instruments available and deliver real end-user benefits.

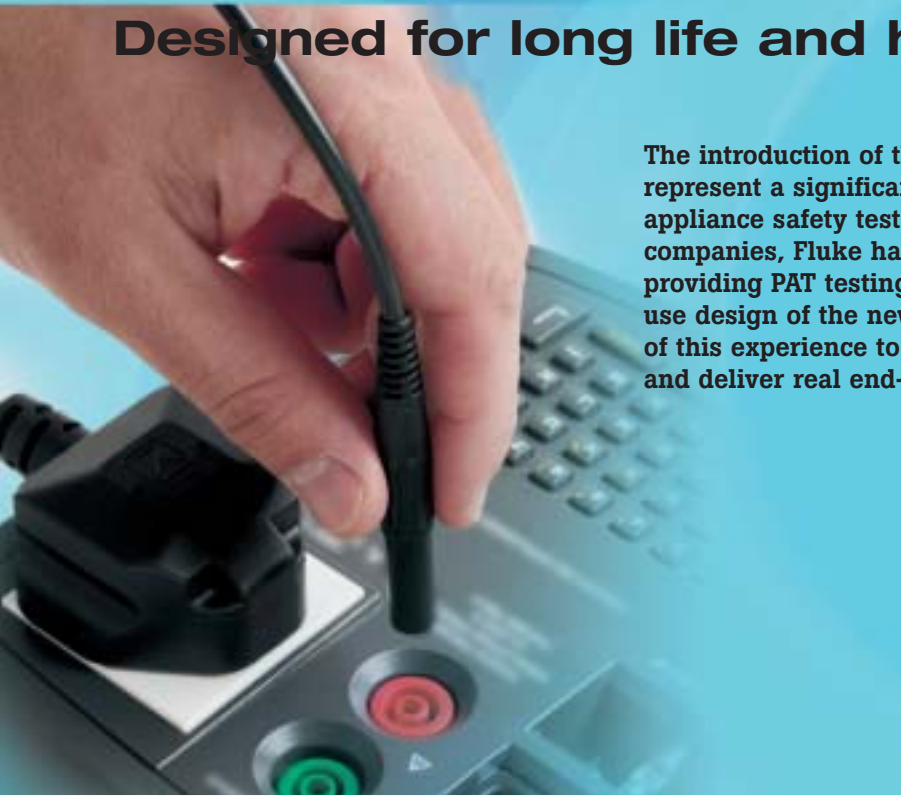

Large backlit display

The graphics display on the 6500 shows informative help screens and detailed data formats to enhance the user friendliness of the instrument. The 6200 has a large static display to make it easy to read. Backlighting aids viewing in dimly lit areas.



Quick connections

The single mains socket for the test appliances minimizes plug swapping, while the built-in IEC socket simplifies the testing of separate mains and extension leads.



Pluggable test leads

The test leads are detachable so they can be easily replaced in the field if they become damaged or worn due to intensive use.

Built-in handle and separate hard case

The strong lightweight enclosure features an integral carrying handle and fits neatly into the separate hard case (supplied as standard). Unlike typical PAT testers with large cumbersome integral cases, the Fluke 6200 and 6500 are easier to carry around in the field.





Features by model

Measurement functions	6200	6500
L N Mains Volts	●	●
Outside Limits Indicators	●	●
Null out facility for earth bond lead	●	●
Protective Earth Resistance PE (200mA)	●	●
Protective Earth Resistance PE (25A)	●	●
Insulation 500V dc	●	●
Protective Earth Conductor Current	●	●
Touch Current	●	●
Substitute Leakage Current	●	●
Appliance Power kVA	●	●
Appliance Load Current	●	●
Seven Segment Custom LCD	●	
Graphical LCD		●
Back Light	●	●
Compact Flash Card receptacle		●
Downloads to a PC		●
External printer output (serial port)	●	●
Front Panel QWERTY Key pad		●
IEC Lead Test	●	●
Auto-testing		●
Pass / Fail Level Programmable Indicators		●
Data Storage		●
Limited Data Storage	●	
Polarity Checks	●	●
Graphical Help Menu On Line		●
Programme Mode		●
Real time clock		●
Front panel results management		●
230V BS1363 Test socket / 230V Mains BS1363 input power plug	●	●

Specifications

General Specifications (model 6200 and 6500)

Size	200 mm (L) x 275 mm (W) x 100 mm (H)	Relative Humidity	non condensing < 10 °C
Weight	3 kg		95% from 10 to 30 °C
Power Supply	230 V + 10 % - 15 %, 50 Hz ± 2 %		75% from 30 to 40 °C
Power Consumption (Tester)	13 W typical (idle) 60 W max. during 25A Bond Test	Operating Altitude	0 up to 2000 m
Operating temperature	0 to 40 °C	Sealing	IP-40 (enclosure) IP-20 (connectors)
Storage Temperature	-10 to 60 °C	EMC	complies with EN61326-1, criteria B
		EMI Immunity	3 V/m
		Safety	Complies with EN61010-1 2nd edition CAT II, 300 V, pol 2


Test Specifications

The accuracy specification for the display range is defined as \pm (%reading + digit counts) at 23 °C \pm 5 °C, \leq 75 % RH. Between 0 °C and 18 °C and between 28 °C and 40 °C, accuracy specifications may degrade by 0.1 x (accuracy specification) per °C. The measurement range meets the service operating errors specified in EN61557-1: 1997, EN61557-2: 1997, EN61557-4: 1997.

Power-on Test


The test indicates reversed L-N, missing PE, and measures the mains voltage and frequency.

Display Range	90 V to 264 V
Accuracy at 50 Hz	\pm (2% + 3 counts)
Resolution	0.1 V (1V - model 6200)
Input Impedance	> 1 M Ω // 2.2 nF
Maximum Input	300 V
Mains Voltage	




Earth Bond Test (R_{pe})

Display Range	0 to 19.99 Ω
Accuracy (after Bond Test zeroing)	\pm (2.5% + 4 counts)
Resolution	0.01 Ω
Test Current	200 mA ac -0% +40% into 1.99 Ω 25 A ac \pm 20 % into 25 m Ω at 230 V
Open Circuit Voltage	> 4 V ac, < 24 Vac
Bond Test Zeroing	can subtract up to 1.99 Ω



Insulation Test (R_{iso})


Display Range	0 to 299 M Ω
Accuracy	\pm (5% + 2 counts) from 0.1 to 300 M Ω
Resolution	0.01 M Ω (0 to 19.99 M Ω) 0.1 M Ω (20 to 199.9 M Ω) 1 M Ω (200 to 299M Ω)
Test Voltage	500 V dc -0 % +10 % at 500 k Ω load
Test Current	>1 mA at 500 k Ω load, < 15 mA at 0 Ω
Auto discharge time	< 0.5 s for 1 μ F
Max. Capacitive Load	operational up to 1 μ F



Touch Current Test


Display Range	0 to 1.99 mA ac
Accuracy	\pm (4% + 2 counts)
Resolution	0.01 mA
Internal Resistance (via probe)	2 k Ω
Measuring method	Probe

The appliance under test is energized at mains potential.

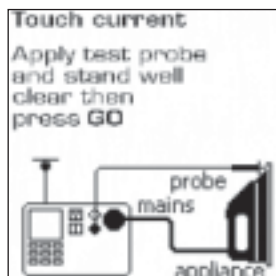

Substitute Leakage Current Test

Display Range	0 to 19.99 mA ac
Accuracy	\pm (2.5% + 3 counts)
Resolution	0.01 mA
Test Voltage	35 V ac \pm 20%

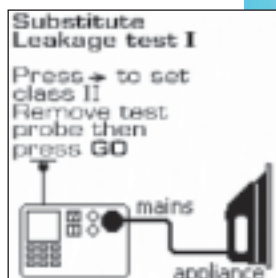

Load/ Leakage Test: Load Current

Display Range	0 to 13 A
Accuracy	\pm (4% + 2 counts)
Resolution	0.1 A

The appliance under test is energized at mains potential.

Load/Leakage Test: Load Power

Display Range	0 to 999 VA 1.0 kVA to 3.2 kVA
Accuracy	\pm (5% + 3 counts)
Resolution	1 VA (0 to 999 VA) 0.1 kVA (1.0 kVA to 3.2 kVA)

The appliance under test is energized at mains potential.

Load/Leakage Test: Leakage Current

Display Range	0.25 to 19.99 mA
Accuracy	\pm (4% + 4 counts)
Resolution	0.01 mA

The appliance under test is energized at mains potential.

PELV Test

Accuracy at 50 Hz	\pm (2% + 3 counts)
Overload protection	300 Vrms
Warning threshold	25 Vrms





Accessories

DMS software (optional)



Fluke DMS software substantially extends the capability of your PAT Tester. Fluke DMS is a powerful windows based PAT data management and reporting software that is ideal for applications where a large number of appliance test are required or where you need to submit customised & professional client reports. You can add your own logo if desired. The software is easy to use and comes supplied on a CD Rom complete with a detailed user manual.

Accessory items (included with product)	6200	6500
Test lead	●	●
Test probe	●	●
Crocodile clip	●	●
Mains cord	●	●
Storage case	●	●
Accessories (Optional)	6200	6500
EXTL100, EXTENSION LEAD TEST ADAPTOR	●	●
SP-SCAN-15, Barcode scanner		●
SP1000, MINI PRINTER	●	●
PASS560R, APPLIANCE PASS LABELS	●	●
FAIL100s, APPLIANCE FAIL LABELS	●	●
APP1000, BARCODE APPLIANCE NUMBER LABELS 0 - 1000		●
IRP1, REGISTER FOR PAT (LOG BOOK)	●	●
Fluke PowerPat Plus software	●*	●
TA700 110V adaptor	●	●

* Requires manual data entry

Special PAT Kits

If you need a complete PAT tester solution, two purpose made kits are available.

Fluke 6200 UK/Kit

Contains:

- 6200 Mainframe
- EXTL 100, Extension lead test adaptor
- Pass 560R, Appliance pass labels
- Fail 100s, Appliance fail labels
- IRP1, Register for PAT (Log Book)

Fluke 6500 UK/Kit

Contains:

- 6500 Mainframe
- EXTL 100, Extension lead test adaptor
- SP Scan 15, Barcode scanner
- Fluke PowerPat plus Software
- Pass 560R, Appliance pass labels
- Fail 100s, Appliance fail labels
- APP 1000, Barcode appliance number labels



INLEC, supporting you to deliver a world class service, every day, in every sector ...



OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor