

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

DET2/2

Auto Earth Tester



- **High resolution – 1 mΩ – ideal for large earthing systems**
- **High accuracy for earth electrode and soil resistivity testing**
- **Test voltage 50 V max. for safety**
- **Rechargeable battery power with long battery life and rapid re-charge**
- **A robust, versatile instrument with IP54 protection**
- **Filter and high current features to enable valid earth testing in difficult situations**

DESCRIPTION

The Megger[®] DET2/2 Auto Earth Tester is a robust compact instrument designed for measuring earth electrode resistance and soil resistivity. It uses the four terminal method of measurement which eliminates the resistance of the current circuit from the measurement. The circuit design ensures that the resistance of the potential circuit does not affect the measurement during practical testing.

The instrument is microprocessor controlled and provides a flexible, 'user-friendly' approach to earth testing by giving good error detection capabilities and full test information on a large easily readable alpha-numeric display. A simple key pad can be used to adjust the test frequency, the test current level and the filtering so that adverse conditions influencing the test may be overcome. The display indicates if:-

- the noise interference in the soil passing the test current is excessive.
- the current test spike resistance is too high.
- the potential test spike resistance is too high.
- the battery needs recharging.

Because these factors are indicated directly the whole testing procedure is accomplished easily and more rapidly. A wide band of test current frequencies, with a resolution of 0,5 Hz, may be used to eliminate errors caused by noise in the earth. The chosen test current frequency, test current level and the increased filtering option are stored in memory for use in subsequent tests.

The display can be set to show its information in the following languages:- English, French, German, Portuguese and Spanish.

The maximum output voltage is limited to 50 V for safety when performing a test and convenience when re-positioning test spikes. The instrument is auto-ranging relieving the operator of any concern as to which resistance range to use. The low service error and an IP 54 environmental specification enable accurate results to be obtained in 'unfriendly' testing conditions.

Power for the instrument is supplied from a rechargeable lead acid battery which gives 5 hours of life per charge, equivalent to six hundred individual tests lasting 30 seconds each.

The DET2/2 is built into a robust plastic case and has its four terminals, equipped for spade or 4 mm connectors, mounted on the front panel.

APPLICATIONS

The DET2/2 Earth Tester is a reliable instrument designed for larger or more complex earthing systems, including communications earthing systems and difficult testing environments. It may be used to test in accordance with BS 7430 (1991), the IEE Wiring Regulations and VDE 0413 part 7 (1982). The instrument is suitable for soil resistivity measurements, which are used to establish the optimum electrode design and site, as well as perform archeological and geological investigations.

Resistivity tests assist in the design of a correct earth system and avoid the cost of re-working electrode installations.

Earth testing kits, which include suitable test spikes and test leads, are available separately.

specifications

Earth Resistance Range

0,010 Ω to 19,99 kΩ (auto-ranging),
1 mΩ resolution.

Accuracy (23°C ±2°C)

±0,5% of reading ±2 digits

Service Error

±5% of reading ±2 digits ±10 m Ω (meets
VDE service error over 50 m Ω)

Comply with Standards

BS 7430 (1991)

VDE 0413 Part 7 (1982)

Test Frequency

105 to 160 Hz reversing d.c. (50 Hz operation default to 128 Hz,
60 Hz operation default to 150 Hz) Set in steps of 0,5 Hz

Test Current

50 mA max (selectable high and low levels)

Maximum Output Voltage

< 50 V r.m.s.

Maximum Interference

Typically 40 V peak-to-peak (50/60 Hz, sinusoidal nature)

Display

Alphanumeric L.C.D. (130 x 35 mm) giving test information and a large (20 mm) 3 1/2-digit reading)

Temperature Coefficient

< ±0.1% per °C over the temperature range -10 to +40°C
0,05% per °F from 14 to 104°F

Temperature Range

Operating: -10 to +40°C (14 to 104°F)

Storage: -20 to +60°C (-4 to +140°F)

Humidity

Operating: 90% RH max. at 40°C (104°F)

Environmental Protection

The instrument is waterproof to IP54

Flash Test: 3 kV a.c.

Voltage Withstand

In the event of a system fault, the instrument will withstand
240 V a.c. applied between any two terminals.

Power Supply

Internal

Rechargeable, sealed lead-acid battery.

12 V (nominal), 2,6-Ah capacity.

Battery voltage over which basic accuracy is maintained is 11,0 to
13,5 V

Battery life: Approximately 5 hrs. continuous use.

Battery charging time: 6 hrs. max. (from completely exhausted), charging current automatically controlled to stop over-charging.

Charging supply required: 100 to 130 V or 200 to 260 V,
50/60 Hz.

Power consumption: 9 W max. at 12 V.

Safety

The instruments meet the requirements of IEC61010-1.

EMC

In accordance with IEC 61326 -1.

Dimensions:

245 H x 344 W x 158 D mm
(9,6 H x 13,5 W x 6,25 D in. approx.)

Weight:

5 kg (11 lb approx.)

Maximum Current Spike (Loop) Resistance

High Range	Low Current	Current
(RE)	(RC)	(RC)
0,010 to 0,499 Ω	5 kΩ	1 kΩ
0,500 to 1,999 Ω	5 kΩ	3 kΩ
2,000 to 19,99 Ω	10 kΩ	5 kΩ
(over 20 Ω RC > 20 k Ω)		


Maximum Potential Spike (Loop) Resistance

High Range	Low Current	Current
(RE)	(RP)	(RP)
0,010 to 0,499 Ω	11 kΩ	11 kΩ
0,500 to 1,999 Ω	21 kΩ	11 kΩ
2,000 to 19,99 Ω	21 kΩ	11 kΩ
(over 20 Ω RP > 20 k Ω)		

ORDERING INFORMATION

Item (Qty)	OrderCode.
Auto Earth Tester	DET2/2
Included Accessories	
Mains supply lead for battery charging	
Operating instruction book	6171-728
Optional Accessories	
Earth testing kit	6310-755
Comprising carrying case and pouch containing:	
Four galvanised steel spikes ('L' shape) 10 mm dia. (0.4 in. dia. approx) x 350 mm (14 in. approx) long	
30 m (98,5 ft approx) of cable on a winder	
50 m (164 ft approx) of cable on a winder	
Two 3 m leads complete with connectors and clips	
Hammer	
Reel of cable, 50 m [164 ft. approx]	6121-119

INLEC, supporting you to deliver a world class service, every day, in every sector ...

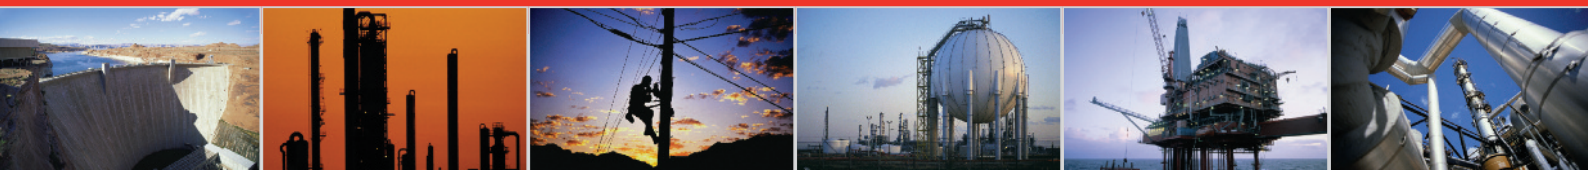

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor