

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

CP11

PORTABLE INDOOR AIR MONITORING

- Measures and logs CO₂, relative humidity and temperature
- Dew Point and Wet Bulb calculations
- High Accuracy Hygromer® IN-1 humidity sensor
- 18,000 data point memory for CO₂, humidity and temperature values
- Maximum, minimum and average value display
- Adjustable audible CO₂ alarm
- Display with backlight
- Adjustable auto power off function
- Mini USB interface



CP11

BE PRECISE: THE MAIN ADVANTAGES AT A GLANCE

The CP11 handheld instrument is the latest development of an economical multiple parameter meter that simultaneously measures and records CO₂, humidity and temperature. It also calculates the dew point and wet bulb temperature. Equipped with the field-tested ROTRONIC HYGROMER® IN-1 humidity sensor, this instrument offers unbeatable value for money. The CP11 includes the ROTRONIC SW2.1 software which can be used to program, download data and save logged files.

Features

- Calculates dew point and wet bulb temperature
- Automatic or manual data logging
- Easy field calibration by simple connection to a known reference
- Auto power OFF function

Connections

- Mini USB port for connection to a PC
- 5 VDC power supply, for connection of the optionally available AC adapter

Large display

- With backlight

Controls

- Large buttons for easy operation of the measuring instrument

Sensors / Calibration

- HYGROMER® IN-1 humidity sensor
- Calibration of humidity possible at 35/80 %RH
- Calibration of CO₂ possible at 0 and 400 ppm

CO₂ calibration

- Opening for a simple CO₂ calibration



APPLICATIONS



Indoor air quality



Monitoring in underground garages (safety)



Leak monitoring in filling plants (safety)

PRINCIPLES


The CP11 handheld instrument evaluates the quality of air with a combined measurement of CO₂, humidity and temperature. A high concentration of carbon dioxide can develop quickly when closed areas with deficient ventilation are filled with people. Carbon dioxide (CO₂) is a colorless and odorless gas that exists in the earth's atmosphere and which is dangerous in high concentrations. The proportion of CO₂ in natural ambient air is about 0.04 % or 400 ppm. When humans and animals exhale this gas, it mixes quickly with the ambient air. A high CO₂ content becomes apparent in humans through rapid fatigue and loss of concentration. In order to initiate suitable countermeasures such as an increase in the supply of fresh air, it is important to measure not only parameters such as relative humidity and temperature, but also the CO₂ content.

Guidelines

350 - 450 ppm	400 - 1,200 ppm	>1,000 ppm	5,000 ppm (0.5 %vol)	38,000 ppm (3.8 %vol)	> 100,000 ppm (10 %vol)
Fresh air outdoors	Room air	Fatigue and loss of concentration become apparent.	Maximum permissible value at the workplace during an 8-hour workday	Breathing air (direct exhalation)	Nausea, vomiting, loss of consciousness and death

TECHNICAL INFORMATION

Dimensions

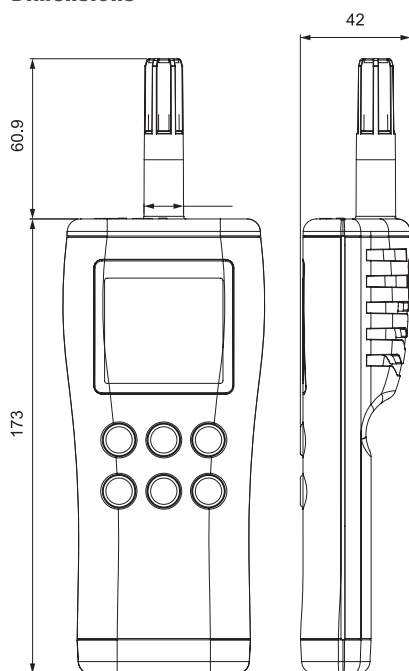


Suitable accessories

Art. no.	Description
AC1214	AC adapter 5 VDC
ER-15	Humidity calibration device
EA35-SCS	Humidity standard 35 %RH
EA80-SCS	Humidity standard 80 %RH
CO2 CALIBRATOR	CO2 calibrator

General	
Type	Handheld device
Parameters	CO ₂ , relative humidity and temperature
Range of application	0...50 °C / 0...100 %RH, non-condensing
Power supply	4 x AA batteries / optional AC adapter AC1214
IP protection	IP30
Clock	Real time clock
Alarm	Adjustable for CO ₂ measurement
Technical information / Functions	
Battery life	50 h
Current consumption	40 mA (typical)
Warm-up time	<1 min.
Calculations	Dew point, wet bulb temperature
Measured value memory	18,000 values with time stamp, automatic recording (%RH / °C / ppm) 99 single values with time stamp, manual recording (%RH / °C / DP / Tw / ppm)
CO₂ measurement	
Measurement principle	Non dispersive infrared (NDIR) with automatic baseline correction (ABC)
Measurement range	0...5000 ppm
Accuracy at 23 °C ±5 K	±30 ppm ±5 % of the measured value
Response time	<10 sec @ 30 cc/min. flow, <3 min diffusion time
Adjustment points	0, 400 ppm
Pressure dependence	+1.6 % reading per kPa
Null drift	<10 ppm/year
Maintenance	No maintenance (standard indoor application)
Humidity measurement	
Humidity sensor	ROTRONIC HYGROMER® IN-1
Measurement range	0.1...99.95 %RH
Accuracy at 23 °C ±5 K	<2.5 %RH (10...90 %RH)
Adjustment points	35, 80 %RH
Response time t63	<30 s, without filter
Long-term stability	<1.5 %RH / year
Temperature measurement	
Sensor	Thermistor
Measurement range	-20...60 °C
Accuracy at 23 °C ±5 K	±0.3 °K
Response time	4 s
Software	
Supplied with the instrument or available as download	SW2.1 (settings, data download, display of measured values)
HW4	Compatible with optionally available HW4 software
Conformities / Housing	
CE / EMC compatibility	CE conformant 2004/108/EC
Housing material	ABS
Dimensions	76.7 x 41.8 x 233.9 mm
Weight	290 g

INLEC, supporting you to deliver a world class service, every day, in every sector ...

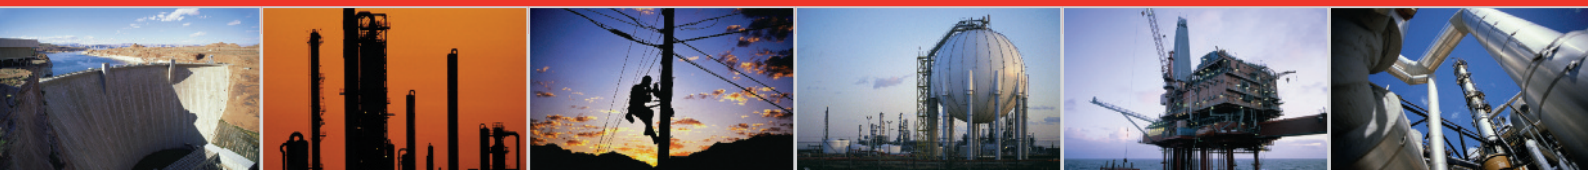

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor