

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

**INLEC.COM**

# DATA-SHEET



Nationwide Low Call  
**0333 6000 600**

**WHY BUY**  
WHEN YOU CAN HIRE

# 50A-3PH Current Injection System



## Features

- Clear and simple user interface
- 3 phase current output
- 0-50A per phase output current
- True RMS digital metering
- Memory ammeter
- Multi-function timing system
- Auxiliary metering input
- Large back-lit liquid crystal display
- Thermal and over-current protection
- Compact and portable
- 220V 3 $\phi$  or 400V 3 $\phi$  supply options\*
- 115V-440V 3 wire supply with optional supply transformer

\*See supply requirements overleaf

T&R Test Equipment is a market leader in the field of current injection equipment. The range includes secondary injection units with 50A output capability up to 6000A primary injection systems. All have true RMS metering, a flexible timing system, and an easy to understand user interface.

The 50A-3PH is a three phase injection system providing commissioning and maintenance engineers with a flexible system for testing protective systems. It has an easy to understand panel layout and a simple user interface. The status of every function can be seen at a glance, and there are no complex menus to navigate.

*The back-lit display on the 50A-3PH is bright and clear with a wide viewing angle. The results of a test can be seen here as they appear on the display*

The unit has a range of outputs allowing injection of currents as low as a few mA and as high as 50A. Voltages up to 18V are available on the main outputs. Three true RMS metering ranges are provided, allowing the full scale of the meter and trip level to be set independently of the selected output. Industry standard safety connectors are used on all inputs and outputs for convenience, reliability and safety.

The 50A-3PH is comprehensively protected by overcurrent, duty cycle and thermal trips, and keeps the user fully informed of any trip condition. Auxiliary outputs and inputs are fuse protected.



An auxiliary metering input is provided and can measure voltage, current, frequency, and the phase between any of the current outputs and an external voltage or current.

The timing system is very flexible without compromising ease of use, allowing trip times, reset times and reclose times to be quickly measured to a high degree of accuracy. Two independently isolated contact inputs are provided, and the timing system may also be used as a stand-alone timer.

The 50A-3ph can be used to test many types of single and three phase secondary protection including:

- |                                 |                              |
|---------------------------------|------------------------------|
| • Over and under current relays | • Earth fault relays         |
| • IDMT relays                   | • Miniature circuit breakers |
| • Auto-reclosers                | • Power relays               |
| • Time delay relays             | • Tripping relays            |
|                                 | • Thermal relays             |



# T&R Test Equipment Ltd

## 50A-3PH Specification

### Main Output

The main output on the unit has two taps, allowing the selection of output voltages up to 18V and output currents up to 50A.

Range	Continuous	5 minutes	1 minute
3.5V	16A	32A	50A
18V	4A	8A	12A

The above intermittent on times must be followed by an off time of 15 minutes, and are based on an ambient temperature of 25°C.

### Metering

The output is metered by a digital true RMS system with a memory ammeter - whenever the timer stops and the output is switched off, the current reading is held on the display. The currents for each phase are displayed simultaneously.

Range	Resolution	Trip current	Accuracy
5.000A	0.001A	5.25A	$\pm 0.6\% \text{rdg} + 5\text{d}$
20.00A	0.01A	21A	$\pm 0.6\% \text{rdg} + 5\text{d}$
50.00A	0.01A	52.5A	$\pm 0.6\% \text{rdg} + 5\text{d}$

A current trip is automatically set to 105% of full scale of the current metering range to protect the device under test.

### Auxiliary Metering Inputs

An auxiliary metering input is provided which is able to measure RMS voltage or current. In addition the frequency of the external input may be measured, and the phase measured between any of the phase outputs and the auxiliary metering input.

Setting	Range	Resolution	Accuracy
Volts ac	270.0V	0.1V	$\pm 0.7\% \text{rdg} + 5\text{d}$
Amps ac	5.000A	1mA	$\pm 0.7\% \text{rdg} + 5\text{d}$
Phase $\pm 180^\circ$	0.1°	$\pm 3^\circ$	
Frequency	20-1000Hz	0.1Hz	$\pm 0.2\% \text{rdg} + 1\text{d}$

The current input is protected by a F6.3A fuse.

### Auxiliary Output

A single phase isolated 110Vac 300mA/220Vac 150mA auxiliary output is provided on the 50A-3PH.

### Lead Set Specifications

The 50A-3PH is supplied with a lead set in a plastic case including: 6 x 3m 4mm<sup>2</sup> output leads terminated in 4mm plugs. 2x3m, 2x0.5m 2.5mm<sup>2</sup> auxiliary leads terminated in 4mm plugs

### Supply Requirements

The supply voltage requirements for the unit must be specified at the time of ordering. The unit is available for operation from either a 400V 4 wire 3p supply or 220V 3 wire 3p supply. The optional delta-star supply transformer allows the 400V unit to operate from other supply voltages.

Supply option 1:	400V-10%+14% 50/60Hz 3ph 1000VA
Supply option 2:	220V-6%+14% 50/60Hz 3ph 1000VA

### RS232 and T&R Link

An RS232 port is provided to allow connection of a printer or PC and the T&R link output provides a phase lock reference for a DVS3 phase-shifting voltage source.

## Timing System

Range	0-999.999s	Resolution	1ms
Accuracy	0.01%rdg+2d (+4d current operated mode)		

The contact circuit has an open circuit voltage of 24Vdc and a short circuit current of 20mA. Each contact circuit will auto-select for normally open or normally closed contacts. A DC voltage of 24-240Vdc may also be used to trigger either timer channel. The output is automatically switched off at the end of the test to safeguard the relay under test.

The following functions are provided:

Mode	Timer Start	Timer Stop
Internal start	Press 'ON'	Contact 1
Single contact	Contact 1	Contact 1
Dual contact	Contact 1	Contact 2
Current operated	Current > 10% of range	Current < 10% of range

Pulse mode is used for setting the current level in devices sensitive to heating, and allows current to be injected for 600ms and the current recorded.

Current operated mode operates on one output phase (selectable).

### Protection and Safety

The unit is protected by electronic over current and duty cycle trips on the outputs, thermal monitoring on the power components, and fuses on the input and regulator. An earth terminal is provided for connection to a local earth. The unit is designed to comply with BSEN61010, and is CE marked.

### Temperature Range

Storage	-20°C to 60°C	Operating	0°C to 45°C
---------	---------------	-----------	-------------

### Dimensions

380mm x 314mm x 221mm

### Weight

21kg

Including handle and corner protectors

### Accessories

Operating manual, output lead set, mains lead, spare fuse set

### Optional Accessories

Delta-Star supply transformer, filter unit, printer, ADMlog Windows PC software.

### Optional Delta-Star Supply Transformer

The optional delta-star supply transformer allows operation from 115V, 230V, 400V, and 440V 3 wire supplies, is selected by a switch on the unit. An auxiliary single phase output is also provided to supply power to a DVS3 voltage source.

Input:	115V, 230V, 400V, 440V $\pm 10\%$ 3 wire 3 phase 1500VA max
3 $\phi$ output:	400V 4 wire 600VA 1 min on/15 min off
1 $\phi$ output:	230V 300VA 5 min on/15 min off



*Note: Due to the company's continuous research programme, the information above may change at any time without prior notification. Please check that you have the most recent data on the product.*


T&R Test Equipment Ltd, 15-16 Woodbridge Meadows, Guildford, Surrey, GU1 1BJ, UK

Tel: +44 (0)1483 207428 Fax: +44 (0)1483 511229 email: sales@trtest.com

**www.trtest.com**



# INLEC, supporting you to deliver a world class service, every day, in every sector ...

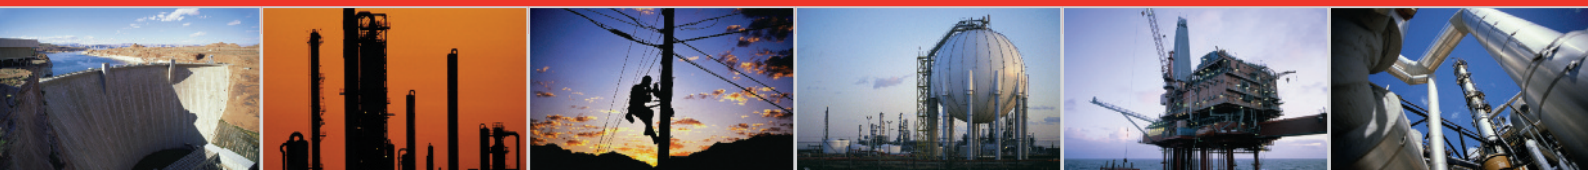

## OUR COMMITMENT TO YOU

### A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

### Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

### Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

### We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

## YOUR 5 WAY GUARANTEE

### 1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

### 2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

### 3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application\*.

### 4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

### 5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

\*subject to availability and conditions

## Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**  
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor