

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET




Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

FX100

FX103/FX106/FX112
Paperless recorder

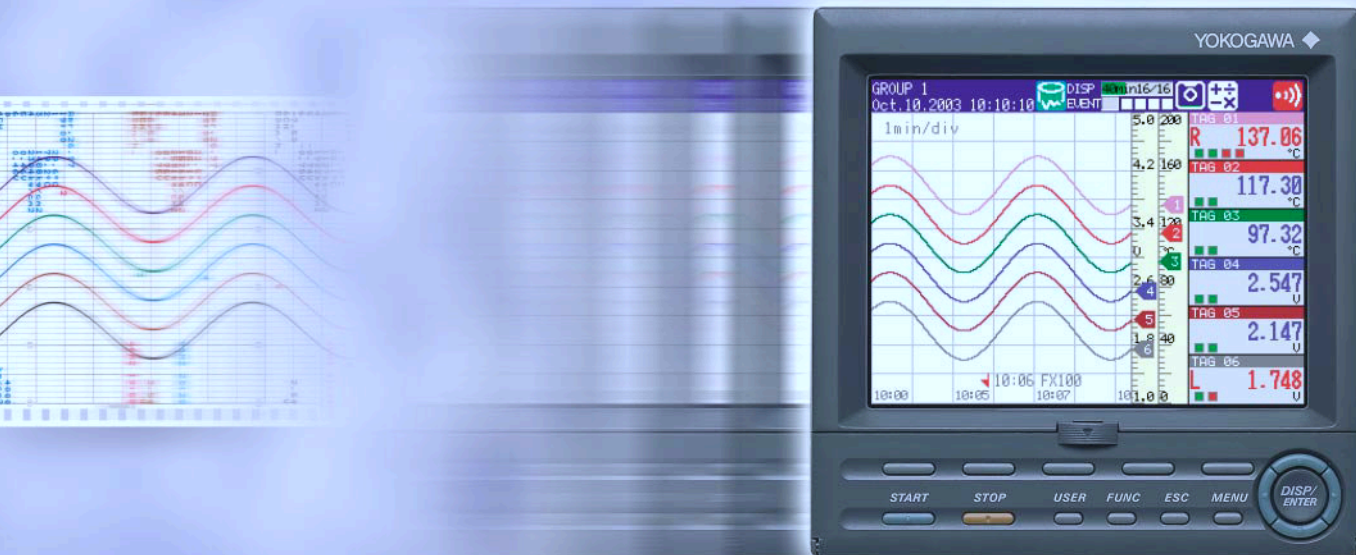

The FX100 is a cost effective paperless recorder with highly optimized performance. Measured data can be easily viewed on the FX's versatile displays, even in the field. Unlike data from chart recorders, electrically stored data can be archived and copied securely, quickly and easily without taking up space. The FX100 delivers what all companies demand: reductions in TCO, improved efficiency, and enhanced control.

Outstanding Display and Flexible Operation

A Wide Variety of Highly Visible Displays

- 5.5" TFT color LCD display with wide viewing angle
- Trend, digital, bar, overview, information, and historical displays
- 4 display groups and 6 channels per group: Freely assignable measurement and mathematical channels
- Display languages: English, German, French, or Japanese

Versatile Measurement

- Universal input and optional inputs (pulse and Pt1000 input)
- Up to 50 VDC direct input, no need of external voltage divider
- Up to 12 analog input channels
- Measurement interval: FX103: 250 ms
FX106, FX112: 1 s and 2 s

Simple and Easy Operation


- Interactive setup with Key panel's navigation keys means easy operation

Dust-proof and Water-proof

- (IP65)
- Can be installed in harsh environment

Easy Wiring

- Detachable analog input terminal makes it easy to wire

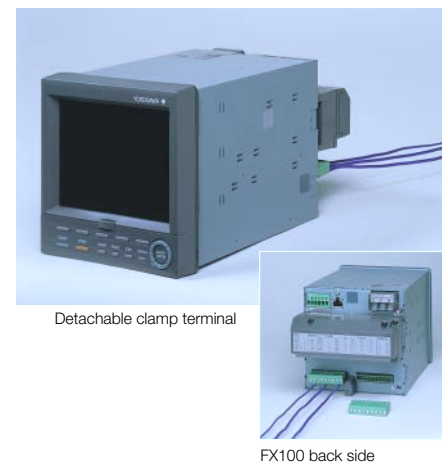


Powerful and Useful Functions

Powerful Computation Functions beyond Simple Calculation (/M1 Option)

- Multiple computations for measurement channels
- Displays and records 12 mathematical channels
- Report function generates periodical report

Example

- When ch02 is high, ch01 value is accumulated.
- When ch01 is over measurement higher limit, total time is accumulated.




A Variety of Communication Option Combination (/C2, /C3, /C7 Option)

- The FX100 supports Ethernet, RS232, RS422A/RS485
- Communication interface can be used with the other options such as alarm output and fail-memory end.
- Ethernet interface and RS232 or RS422A/RS485 can be used together

Reliable Measurement

Delivers Stable Measurement

- FX100 uses High-breakdown-voltage Solid-state Relays as scanners for switching signals, thus overcoming the problem of defective measurement caused by faulty or worn contacts of the mechanical contact.
- Resolution of A/D with 16 bits and isolated channel inputs for DC voltage and TC input make it stable measurement.

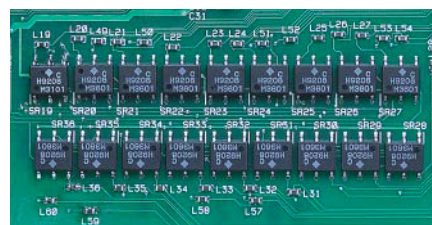

High-breakdown-voltage solid-state relays

Secure Data Acquisition

Protects Data When Power Interrupted


- The internal flash memory is nonvolatile (requiring no battery backup), and holds measurement data even during a power interruption.

Keeps Your Data Secure

- FX100 saves measurement data in binary format which provides high level of security.



Internal flash memory



Data security in binary format


PC Software

Online/Offline Configuration

- Setting can be sent to or received from the FX100.

Data Viewer/Conversion

- Data can be displayed, printed, or converted to ASCII, Lotus 1-2-3 and Excel format.



Standard software DAQSTANDARD

Meets Your Needs, Fits Your Applications

The FX100 provides an excellent alternative to chart recorders through enhanced data management and high performance. With a powerful set of optional functions such as pulse input, Pt1000, and mathematical functions, the FX100 enables easy operation tailored to your specific application, whether it be water treatment, wastewater treatment, heat treatment, process technology, or environmental test equipment.


Data Display/Record in Wastewater Treatment

FX100 can display measured data and computation results in real time.

- Display and record Inputs data such as temperature, flow, turbidity, pH, dissolved oxygen
- Easy analysis data on the PC
- Water quality management with the option Pt1000 (/N3): Temperature display with high resolution
- Pulse measurement up to 100Hz with option pulse input (/PM1): Display/record of computations such as flow accumulation


Example

- Process flow (F1-F2) display/record.
- The accumulation flow display on 31ch

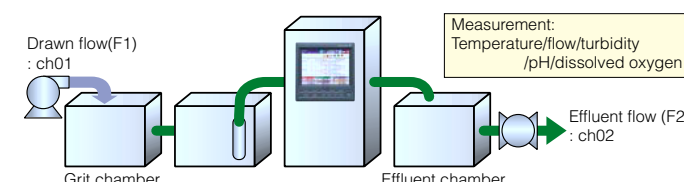

Acquiring Sterilization Data for Food

Records sterilization process with optional mathematical function (/M1): Easy F0 computation

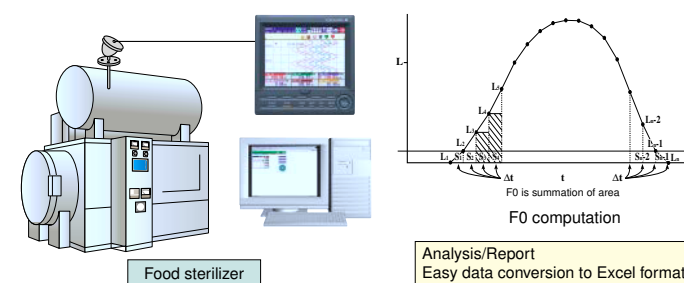


- Multi points and mixed inputs types (Temperature, F0, pressure, etc) record
- Improve efficiency by electric record
- Measurement ON/OFF by external input (option)
- Storing files by each test

Temperature Recording/Monitoring for Aluminum Casting


Simplifies casting temperature quality management.

- Displays and records Aluminum casting data
 - Molten metal temperature
 - Cooling water temperature
- Archives data upon alarm occurrence
 - Analysis alarm data

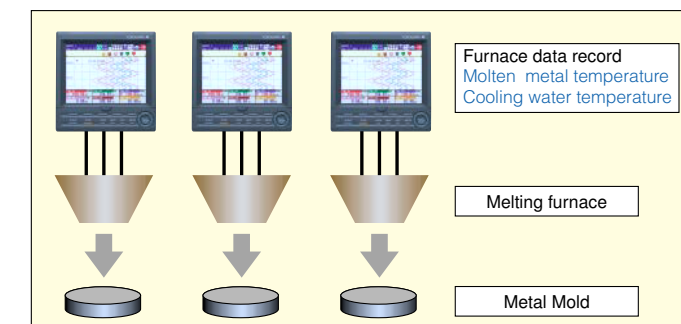

Data Display/Record in Environmental Chamber

FX100 measures accurate environmental test data and displays data on versatile screen.

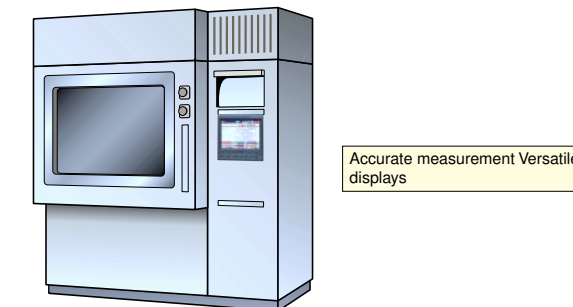


- Records Data (temperature, humidity, voltage, current)
- Versatile display enable easy interpretation of data
- Easy data analyzing with PC software
- Simple design and paperless recorder reduces TCO

Remote Monitoring for Water Distribution

Simple data acquisition over a wide area networking is available with optional Ethernet communication port (/C7 option).

- Effective data management/data monitoring via wide area networking
- Can select no external media (reduces TCO) Stores data file in FTP server
- Real time data monitoring at remote sites
- E-mail notification upon occurrence of alarm
- Generates periodic report (/M1 option)

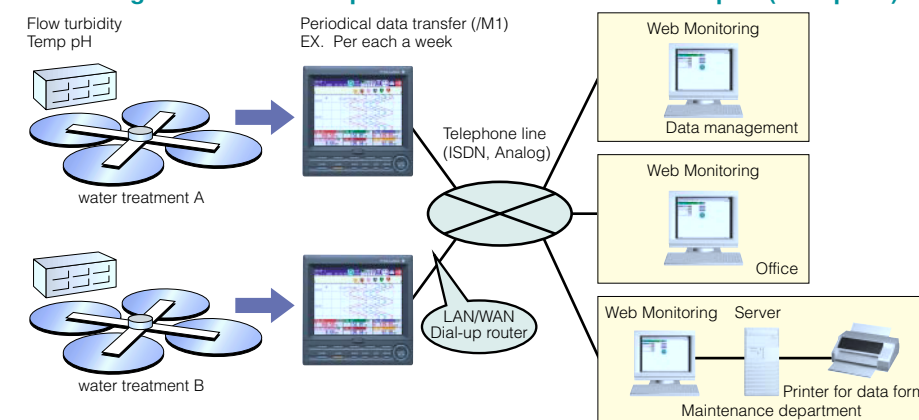

FX100 Specification

Input section

Measurement points: FX103 3 (three) channels
 FX106 6 (six) channels
 FX112 12 (twelve) channels

Measurement interval: FX103 250 ms
 FX106, FX112 1s, 2s

Input Types: DCV:20mV, 60mV, 200mV, 2V, 6V, 20V, 50V
 TC: R, S, B, K, E, J, T, N, W, L, U, WR
 RTD: Pt100, JPt100 (Pt1000: Optional)
 DI: voltage input (TTL), contact input
 DCA: with external shunt register

Simple Calculation: Differential, linear scaling, square root

Maximum allowable input voltage:
 ±10 VDC (continuous) for less than 200mVDC range, TC, RTD, DI ranges
 ±60 VDC (continuous) for more than 2 VDC range

Maximum common mode noise voltage:
 250 Vrms AC (50/60Hz)

Maximum noise voltage between channels:
 250 Vrms AC (50/60Hz)

Display

Display: 5.5" TFT color-LCD

Display types: Trend, bar graph, digital, overview, historical, information (alarm, message, memory)

Language: English, French, Germany, Japanese

Data Storage Function

Internal memory: Flash memory

External media: One of the following external media options can be specified:
 - None, - 3.5" floppy disk, - compact flash memory card (32MB-512MB)

Saving method: Automatic saving or manual saving

Data type: Display data, event data

Data format: Binary format

Alarm Function

Number of levels: 4 levels per channels

Type of alarm: Higher/lower limits, differential higher/lower limits, rate-of-change rising/falling limits

Construction

Dimensions: 144(W) x 144(H) x 234(D) mm

Weights: FX1xx-0: approximately 2.2 kg
 FX1xx-1: approximately 2.5 kg
 FX1xx-4: approximately 2.3 kg

Front panel: Water and dust proof (based on IEC529-IP65, except external icing test, except for side-by-side mounting)

Model	Suffix code	Option code	Description
FX103			FX100(3ch)
FX106			FX100(6ch)
FX112			FX100(12ch)
External memory	-0		None
	-1		FDD (3.5 inch, 1.44MB)
	-4		Compact flash memory card(32MB)
Display Language		-2	English (German/French)
Option	/A1		Alarm output 2 points *1
	/A2		Alarm output 4 points *1
	/A3		Alarm output 6 points *1
	/C2		RS-232 communication interface **
	/C3		RS-422-A/485 communication interface **
	/C7		Ethernet(10BASE-T) communication interface
	/F1		FAIL/memory end output **
	/M1		Mathematical function (with report function)
	/N2		3 legs isolated RTD
	/N3		Pt1000Ω input
	/PM1		Pulse input 3 points, remote control 5 points (including Mathematical function) *4
	/R1		Remote control 8 points

*1: /A1, /A2, /A3 cannot be specified together.

*2: /C2, /C3 cannot be specified together.

*3: If /F1 is specified, /A3 cannot be specified.

*4: If /PM1 is specified, each /A3, /R1, and /M1 cannot be specified.

*4: If /PM1 is specified, /A2 and /F1 cannot be specified together.

In case that Modbus master function is utilized, either /M1 or /PM1 must be specified.

The TCP/IP software used in this product and the document for that TCP/IP software are based in part on BSD networking software, Release 1 licensed from The Regents of the University of California.

- Ethernet is a registered trademark of XEROX Corporation.
- Modbus is a registered trademark of AEG Schneider
- Other company and/or product names are registered trade mark of their manufactures.



YOKOGAWA ELECTRIC CORPORATION

Network Solutions Sales Business Div./Phone: (81)-55-243-0309, Fax: (81)-55-243-0397
 E-mail: tm@csv.yokogawa.co.jp

YOKOGAWA CORPORATION OF AMERICA
 YOKOGAWA EUROPE B.V.
 YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (1)-770-253-7000, Fax: (1)-770-251-2088
 Phone: (31)-33-4641806, Fax: (31)-33-4641807
 Phone: (65)-62419933, Fax: (65)-62412606

Power Supply

Rated voltage: 100 to 240 VAC
 Rated frequency: 50/60 Hz
 Power consumption: normal 22 VA, maximum 35 VA

Safety and EMC Standards

Safety standards: Certified by CSA22.2 No.1010-1, UL61010B-B complies with EN61010-1

EMC standards: Complies with EN61326-1

Optional Pulse Input Functions (/PM1)

Number of channels: 3 for pulse, and 5 for remote controlling

Applicable frequency: Up to 100 Hz

Minimum pulse width detection:
 Low (close), high (open) : more than 5ms

Optional Relay Output (/A1, /A2, /A3)

Number of outputs: 2,4, or 6 points; energized/
 di-energized, hold/non-hold, AND/OR

Optional Serial Communication functions (/C2, /C3)

Connection: EIA RS232 (/C2) or RS-422-A/485 (/C3)

Protocols: Yokogawa private protocol

Modbus function: MODBUS RTU MASTER/ SLAVE

Optional Ethernet Communication functions (/C7)

Connection: Ethernet (10Base-T)

Functions: E-mail notification, Web-server, FTP function

Optional Mathematic Functions (/M1)

Number of channels: Up to 12 channels

Operations:
 General arithmetic operations:
 Four arithmetic operations, square root, absolute, common logarithm, exponential, power, relations, logic operations.

Statistical operations: Average, minimum, maximum, and summation

Constant: Available (up to 30 constants)


Digital data input via communication:
 Up to 12 data

Report function:
 Type: Hourly, daily, hourly+daily, daily+weekly, daily+monthly
 Operation: Average, maximum, minimum, summation
 Data format: ASCII

Optional Remote Controlling Functions (/R1)

Number of channels: 8 points

Operable items: Memory start/stop, computation start/stop, computation data reset, alarm acknowledgement, event file external trigger, message writing, load setting, time setting, snapshot.

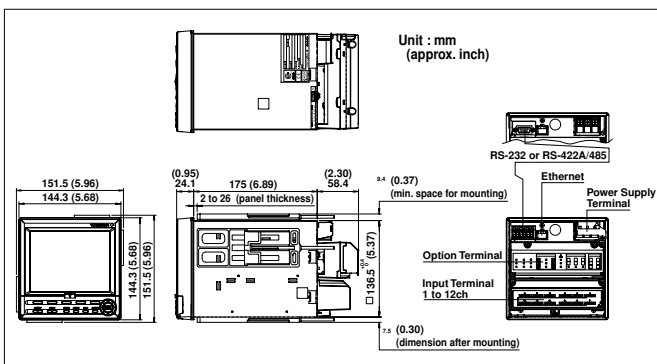


NOTICE

- The mounting hardware is attached on both sides or at the top and bottom (2places) for panelmounting.
- See the general specification sheet (GS 04N03A01-00E) for the panel cutout for side by side or top-and bottom mounting.

Subject to change without notice.
 [Ed : 01/b] Copyright ©2003
 Printed in Japan, 310(YG)

INLEC, supporting you to deliver a world class service, every day, in every sector ...

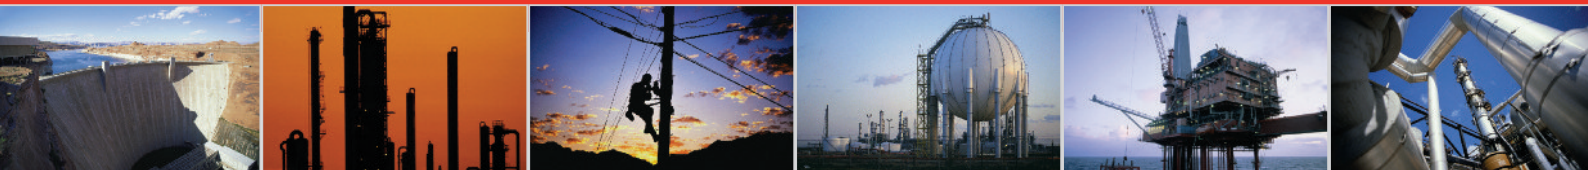

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor