

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE


INLEC.COM

DATASHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

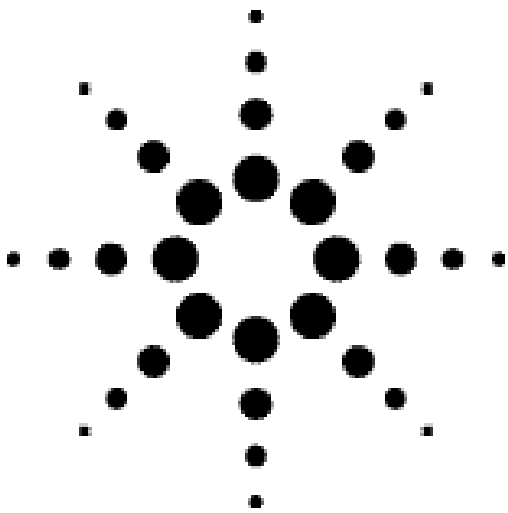

Agilent Technologies 54520A

Data Sheet



Product Specifications

General Specifications

Maximum Sample Rate

HP 54520A 1 GSa/s (1 CH on), 500 MSa/s (2 CH on)

Number of Channels (all are simultaneous acquisition)

HP 54520A: 2

Record Length

32,768 pts (real time) maximum

501 pts (repetitive)

Resolution

8 bits, 10 bits via HP-IB with averaging

Vertical Specifications

Repetitive Bandwidth

500 MHz (equivalent time) (rise time \leq 700 ps)

Real Time Bandwidth

HP 54520A 125 MHz (2 CH) 250 MHz (1CH)

Sensitivity

1 mV/div to 5 V/div

dc Gain Accuracy

\pm 1.25% of full scale

Input Impedance

R: 1 Mohm \pm 1% or 50 ohm \pm 1%

C: 7 pF nominal

Input Coupling

ac, dc

Maximum Input

1 Mohm \pm 250 V (dc + ac) [ac < 10 kHz]



50 ohms: 5 V rms

Offset Range

Vertical Sensitivity Available Offset

1 mV to 50 mV/div ± 2 V

>50mV to 250 mV/div ± 10 V

>250 mV to 1.25 V/div ± 50 V

>1.25 V/div to 5 V/div ± 250 V

Offset Accuracy

$\pm(1.25\%$ of channel offset + 2% of full scale)

Voltage Measurement Accuracy

Dual Cursor $\pm[(1.25\%)(\text{full scale})+(0.032)(\text{V/div})]$

Single Cursor $\pm[(1.25\%)(\text{full scale})+(\text{offset accuracy})+(0.016)(\text{V/div})]$

Horizontal Specifications

Time Base Range

500 ps/div to 5 s/div

Resolution

10 ps

Delta-t Accuracy

Repetitive: (> 8 averages) $[(0.005\%)(\text{delta-t})+(100 \text{ ps} + 0.1 \% \text{ of full scale})]$

Real Time $[(0.005\%)(\text{delta-t})+(0.2)(\text{sample period})]$

Peak Detect $[(0.005\%)(\text{delta-t})+(1 \text{ sample period})]$

Time Tag

Resolution 100 ps

Accuracy $\pm[0.005\%(\text{reading})+100\text{ps}]$

Delay Range (posttrigger) $10\text{E}07 \times \text{sample period}$

Delay Range (pretrigger) $32\text{K} \times (\text{sampleperiod})$

Trigger Specifications

Sensitivity dc to 100 MHz 100 MHz to 500 MHz

Internal 0.5 div 1.0 div

External (54520A) $0.0225 \times (\text{signal range})$ $0.045 \times (\text{signal range})$

Auxiliary dc to 50 MHz: 250 mVp-p

Pulse Width (minimum) 1 ns

Level Range

Internal $\pm 1.5 \times \text{full scale}$ from center screen

External (54520A) $\pm 25\text{V}$

Auxiliary $\pm 5\text{V}$

Modes Edge, pattern, glitch, time qualified pattern, line, state, event-delayed, time-delayed, TV (NTSC, PAL, and user-definable formats)

Trigger Coupling dc, ac, low frequency reject

Display Characteristics

Display Mode "A" models feature monochrome CRT (Cathode Ray Tube) displays. "C" models feature flat-panel color TFT (Thin Film Transistor) liquid-crystal displays.

Modes Averaging from 2 to 2048, envelope, infinite&

variable persistence from 500 ms to 10 s, connect the dots, peak detect

Graticules full grid, axes, frame, or no graticule
Measurements

Automatic 23 measurements on front panel or over HP-IB:

Rise time V p-p V dc rms
Fall time V min Preshoot
Frequency V max Overshoot
Period V avg Voltage at time
- Width V base Time at min voltage
+ Width V amptd Time at max voltage
Duty cycle V top Time at voltage
Delta time V ac rms

User-Definable

Both upper and lower thresholds can be set from -25% to 125% for all automatic measurements

Modes

Continuous, statistics, limit test, or waveform compare

Math/Analysis Functions Operators

add, subtract, multiply, versus, integrate, differentiate, invert magnify, and FFT

Additional Characteristics

Peak Detect Captures and displays glitches or other high-speed events as narrow as 1 ns in real-time mode at sample rates of 250 MSa/s or less with sequential single-shot turned off.

Sequential Captures successive single-shot events without Single Shot capturing the dead time in between, and stores up to 400 Kbytes of waveform data.

Sequential Single-shot Throughput

Record Waveforms Stored Max Number of
Length Per Second Waveforms Stored
50 1333 4395
500 1111 739
8000 294 49
32,000 90 12

Waveform Store

4 nonvolatile, 2 pixel (volatile), and segmentable memory for storing measurement failure waveforms or sequential single-shot waveforms.

Screen Update Rate (typical at 500 ns/div)

record length (points)
Real Time 500 8K 16K 32K
updates/s. 150 110 84 58

Repetitive normal 8 avgs 128 avgs

updates/s: 150 91 91





Optional Capabilities

Optional Telecommunication-Mask Application

Make telecom mask-template measurements to ANSI, CCITT, and ISDN standards using the HP 54520 or 54540 series oscilloscopes equipped with Option 001. Option 001 features 21 standard masks stored on a flexible disk. You can automatically trigger on positive isolated ones in live traffic for many standard telecom signals. The scope will automatically best-fit the test signal to many masks and give automatic pass-fail comparisons of the mask to its corresponding input signal.

For more information on Option 001, Telecommunications Masks Applications ask your HP Sales representative for HP Product Overview 5963-1859E (international version) or 5963-1859 EUS (US version).

Optional Active Probing

The HP 1144A active probe features 800-MHz bandwidth, 2-pF input capacitance, and 1-Mohm input resistance. The HP 1145A two-channel active probe features 750-MHz bandwidth, 2-pF input capacitance, and 1 Mohm input resistance and is designed for easy connection to surface mount devices.

I/O Characteristics

HP-IB Fully programmable, complies with IEEE 488.2
RS-232 Bidirectional serial communication
Centronics Talk-only parallel communication for HP PCL compatible printers

Hardcopy Supported Printers

Color "C" Models Monochrome "A" Models
HP 540 Centronics Thinkjet HP-IB, RS232
HP 560C Centronics HP 540 Centronics
HP 560C, Centronics
B/W only

Supported Plotters:

HP Color Pro HP-IB HP 7440A HP-IB
HP 7475A HP-IB HP 7475A HP-IB
HP 7470A HP-IB HP 7470A HP-IB
HP 7550A HP-IB HP 7550A HP-IB

Disk Drive

DOS-compatible, 3-1/2" disk drive to store and recall setups, waveforms, and screen images (TIFF, PCX, and EPS). The disk drive is also utilized to download the oscilloscope's operating-system software and can be used to upgrade the scope's software as future upgrades become available. A free software-upgrade notification service is offered to registered users.

Front Panel Setups

9 (nonvolatile memories)

FFT Characteristics

Frequency Range dc to:

500MHz (1 ch)
250MHz (2 ch)

Frequency Resolution:

Minimum (max samp rate)/(512 pts):
977 kHz (2ch)
1.95 MHz (1 ch on)

Maximum (min samp rate)/(32,768 pts):
0.305 MHz

Horizontal Magnify

Specify the frequency that is displayed at center screen, and magnify the frequency-domain display about that point.

Frequency Accuracy

$[1/2 (\text{sample frequency}) (1/32768)] +$
 $(5 \times 10E-5)(\text{signal frequency})$

Amplitude Display

Power in dBm

Windowing

Hanning, Flattop, Rectangular

Environmental Characteristics

Power Voltage 115/230 Vac, -25% to +15%, 48 to 440Hz,
350 VA maximum

Weight Net: approximately 11.8 kg (26lb)

Shipping: Approximately 21.3 kg (47 lb)

Dimensions Height: 218 mm (8.6 in)

Width: 440 mm (17.3 in)

Depth: 367 mm (14.5 in)



INLEC, supporting you to deliver a world class service, every day, in every sector ...



OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor