

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

Pinless Moisture Meter User Manual



**Please read this manual before switching the unit on.
Important safety information inside.**

Contents

	Page
1.Introduction	3
2.Features.....	3
3.Specification.....	4
4.Front Panel Description.....	5
5.Operation.....	6
6.Battery Replacement.....	7

1. Introduction

The Pinless Moisture Meter is an electronic dampness indicator with a measuring process working on the principle of high frequency measurement. The instrument is used for non-destructively tracing dampness in building materials of all kinds as well as for detecting damp distribution in walls, ceilings and floors. It is particularly suitable for pre-testing the readiness of building materials for covering prior to CM measurement.

2. Features

- Quickly indicate the moisture content of materials
- Depth of penetration about 20-40mm.
- Low battery indication
- Auto Power Off
- MAX/MIN Function
- Measure and HOLD Function
- White Backlit LCD Display

3. Specification


Sensor Type	Metal Spheroid
Measuring Range	0 to 100
Max Resolution	1
Battery	9V battery
Dimensions	180mm x 45mm x 35mm
Weight	180g

Adjustment

- The instrument is calibrated fully electronically and readjustment is not necessary.
- Safety remarks.
- These is a risk of injury if the metal ball comes into contact with live parts. Do not use the instrument in the immediate vicinity of older equipment or equipment equally sensitive to high frequencies (e.g.functioning medicinal equipment). Use the instrument only for measuring the dampness in hardened building materials by bringing the ball into contact with the surface.
- Instrument Check.
- Hold the instrument as near to the back as possible. Press the “MEAS” button and hold the instrument with the ball in the air. The displayed value must be between -5 and +5.

4. Front Panel Description

- 1-Metal Ball
- 2-LCD Display
- 3-Power ON/OFF Button
- 4-MAX/MIN Button
- 5-Backlight Button
- 6-MEAS Button
- 7-Battery Cover

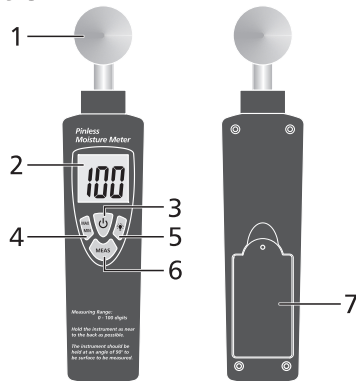

Button Function

•Power Button

Turn the meter power ON or OFF.

•MEAS Button

Press the MEAS button, the instrument will start measuring. Release this button the "HOLD" icon will appear on the LCD indicating that the current reading is being held.

•MAX/MIN Button

When taking measurements, press MAX/MIN Button, the "MAX" icon will appear on LCD display and the meter will begin keeping track of MAX value. Press the button again, "MIN" icon will appear on LCD display and the meter will begin keeping track of MIN value. Press MAX/MIN button for two seconds to exit this mode.

•Backlight Button

Turn the backlight on or off.

5. Operation

Hold the instrument as near to the back as possible. Press the "MEAS" button and use the ball to scan the surface under investigation. The ball must be in firm contact with the material. To obtain the best results, the instrument should be held at an angle of 90° to the surface to be measured.

Note:


- Do not take measurements on metallic linings!
- In corners or recessed areas a distance of ca. 8-10 cm from the edge/recess must be maintained.
- If there is any metal in substructure (constructional steel, channels, pipes, plaster rails, etc.) and with normal coverings, the display jumps to ca. 50 digits for otherwise dry surroundings.
- It is only possible to reach a conclusion about the absolute dampness in wt-% or the dampness in CM-% if the normal drying out process has taken place (e.g. not during or shortly after the use of drying agents or heat guns). If there is not a roughly normal variation in dampness between the surface and the interior, too low a measured value may be indicated.
- The raw density of the material being measured has a noticeable effect. Basically, the value displayed with dry and damp building materials increases correspondingly with increasing raw density.

- The values given in the table below are indicative and non-binding. Please bear in mind, when evaluating the measured value displayed on the NON-Contact Moisture Meter with respect to the material, that it is not a dampness measurement qualified to VOB or the relevant specialist regulations.
- All information and tables in these operating instructions concerning permissible or common dampness conditions in practice as well as the general definition of terms are taken from the technical literature. The manufacturer of the instrument can thus not give any guarantee for the correctness of this information. The conclusions to be drawn from the result of measurements by each user depend upon the individual circumstances and his experience gained from professional practice.

Construction material:

Gypsum	0..35	Dry
	36..60	Half-dry
	61..100	Wet
Cement	0..25	Dry
	26..50	Half-dry
	51..75	Wet
	above 75	All Wet


6. Battery Replacement

If the icon “” appears on the LCD display, it indicates that the battery should be replaced. Open the battery case and replace the exhausted battery with new battery.

Rev.090422



INLEC, supporting you to deliver a world class service, every day, in every sector ...

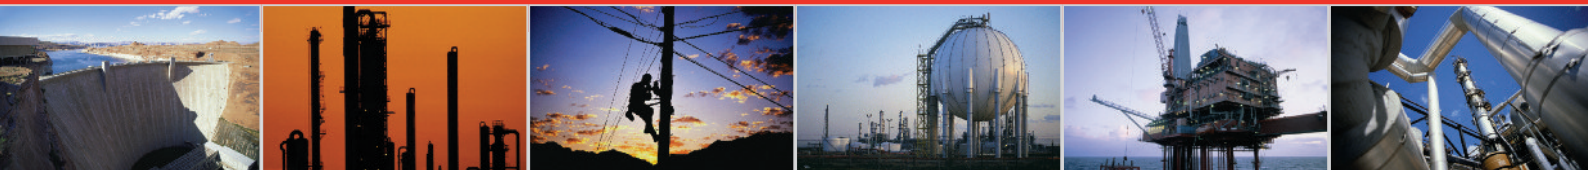

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor