

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATASHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

PCU1/E



Primary Current Injection System



Features

- 6.9kVA output capability
- Continuously variable output
- Multi-function digital timing system
- Digital true RMS ammeter with memory
- Digital true RMS voltmeter
- Automatic switch-off at end of test
- Rugged, compact design
- Secondary injection up to 100A
- Loading units from 500A-3000A
- Low impedance, dual-range outputs

The PCU1/E Mk5 primary current injection system is ideally suited to commissioning and maintenance testing where high currents up to 3000A are required. The system consists of separate control and loading units for maximum flexibility. The control unit contains all control and metering circuitry, and is linked to the loading unit by control and metering cables. The control unit is capable of injection of currents up to 100A, and adding an optional external loading unit up-rates the output capability to 500A-3000A.

The combination of the PCU1/E and a suitable loading unit is ideal for all low power primary current injection tasks up to 3000A, including testing under and over current relays, circuit breakers and CT ratio testing.

Where higher power is required, the PCU2/E and associated loading units can supply up to 20kVA and inject currents up to 6000A.

Four loading units are available, delivering output currents between 250A and 3000A. Each loading unit has two outputs which may be connected in series or parallel for maximum flexibility. For example, the LU3000LP may be configured to either give a maximum current of 1500A at 4V or 3000A at 2V.

A full range of output leads are available to complement the PCU1/E and loading units.

The control unit is rated at 6.9kVA, and has digital current and voltage metering. A memory facility is provided on the metering to hold the current reading when the output trips or is switched off. The current is automatically switched off when the device under test trips.

The PCU1/E has a flexible timing system, allowing timing tests to be carried out to a resolution of 1ms. Selection for normally open or normally closed contacts is automatic, and the status of the contacts is shown on the front panel. Timing modes are available to test under and over current devices, re-closers, under and over voltage devices, and many current trips and circuit breakers.



LU3000LP,
LU500 and
PCU1/E



T&R Test Equipment Ltd



PCU1/E Control Unit Specification

Secondary Injection Output

The secondary current injection output on the unit has two taps, allowing the injection of currents up to 100A.

Range	Continuous current	Intermittent current 5min on/15 min off
0-5V	0-50A	0-100A
0-10V	0-25A	0-50A

Voltage Output (non-isolated)

Voltage	Current (cont.)	Current (5 min on/15 off)
0-230V	0-15A	0-25A

The voltage output is metered by two 4 digit true RMS digital meters to measure voltage and current.

Meter	Full scale	Resolution	Accuracy
Voltage	300.0V	0.1V	±0.6%rdg+6d
Current	30.00A	0.01A	±0.6%rdg+6d

Loading Unit Output (non-isolated)

Voltage	Current (cont.)	Current (5 min on/15 off)
0-230V	0-15A	0-30A

Current Metering

The AC output current is metered by a true RMS 4 digit memory ammeter (acquisition time 200ms) with an LED display.

Range	Full scale	Resolution	Accuracy
0-10V 50A	50.00A	0.01A	±0.6%rdg+6d
0-5V 100A	100.0A	0.1A	±0.6%rdg+6d

Loading unit	Full scale	Resolution	Accuracy
LU500	500.0A	0.1A	±0.6%rdg+6d
LU1000	1000A	1A	±0.6%rdg+6d
LU2000	2000A	1A	±0.6%rdg+6d
LU3000LP	3000A	1A	±0.6%rdg+6d

Timing System

The PCU1/E has a flexible timing system with two contact inputs and 5 operating modes. Both the start and stop contact circuits will accept volt free contacts or contacts connected to a dc voltage system (220V max). Each contact circuit automatically selects for N/O or N/C contacts, and the status of each contact input is shown by an LED. The timing channels may also be triggered by a dc voltage between 24 and 240V. The timing system will also respond to the rise and fall of current in the test object for devices where no auxiliary contact is available.

Timer resolution	1ms
Timer full scale	999.999s
Timer accuracy	±0.1%rdg+2d (3d current mode)
Contact O/C voltage	24V
Contact S/C current	100mA
Vdc input range	24-240Vdc

Timer mode	Timer start	Timer stop
Internal Start	'On' button	Contact
Single contact	Contact 1	Contact 1
Dual contact	Contact 1	Contact 2
Current operated 50%	Current >10%	Current <10%
Current operated 100%	Current >20%	Current <20%
Off	of range	of range
	Setting position	

Supply Requirements

230V±10%	45-65Hz	1ph	7.2kVA max
----------	---------	-----	------------

Dimensions

490mm x 300mm x 300mm

Weight

35kg

Temperature Range

Storage -20°C to 60°C, Operating 0°C to 45°C

Protection and Safety

The PCU1/E and loading units are CE marked and are designed to meet the requirements of BS EN61010. The system is protected by electronic trips on the outputs, circuit breakers on the mains input and control unit output, and fuses on the contact inputs.

Control Unit Standard Accessories

Mains lead (2m), loading unit power and metering leads (5m), operating manual and spare fuses.

Optional Loading Unit Specifications

Loading units are available to increase the output capabilities of the unit with a range of current ratings. The output of the loading unit is isolated, and consists of two windings which may be connected in series or parallel. All metering functions are handled by the control unit.

Loading unit intermittent ratings (5 min on/15 off)

Unit	Series connection		Parallel connection		Max
Type	Current	Voltage	Current	Voltage	kVA
LU500	0-250A	0-8V	0-500A	0-4V	2
LU1000	0-500A	0-8V	0-1000A	0-4V	4
LU2000	0-1000A	0-6V	0-2000A	0-3V	6
LU3000LP	0-1500A	0-4V	0-3000A	0-2V	6

Loading unit continuous ratings

Unit	Series connection		Parallel connection		Max
Type	Current	Voltage	Current	Voltage	kVA
LU500	0-125A	0-8V	0-250A	0-4V	1
LU1000	0-250A	0-8V	0-500A	0-4V	2
LU2000	0-500A	0-6V	0-1000A	0-3V	3
LU3000LP	0-750A	0-4V	0-1500A	0-2V	3


Unit	Dimensions	Weight
LU500	290 x 320 x 425mm	29kg
LU1000	290 x 320 x 425mm	37kg
LU2000	290 x 320 x 425mm	45kg
LU3000LP	290 x 320 x 475mm	52kg

Optional Output Lead Set Specifications

A range of output lead sets are available in a range of lengths to complement the PCU1/E system, with current ratings between 500A and 3000A.

Type	Length	CSA	Termination
500AL	1m to 5m	70mm ²	Ring crimp
1000AL	1m to 5m	140mm ²	Copper bar
2000AL	1m to 5m	280mm ²	Copper bar
3000AL-LP	1m to 2m	420mm ²	Copper bar

INLEC, supporting you to deliver a world class service, every day, in every sector ...

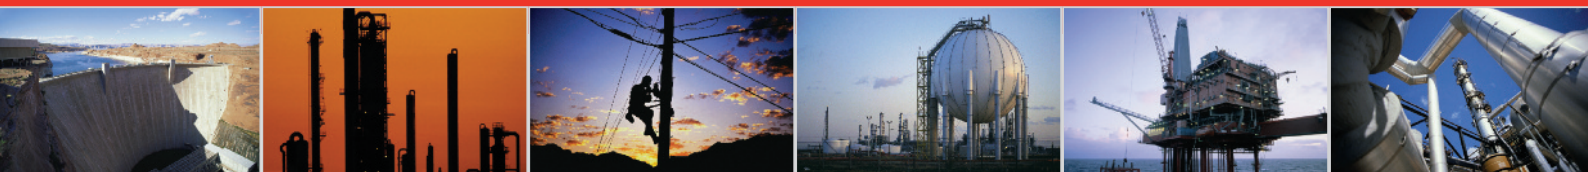

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call **0333 6000 600**
Online: **www.inlec.com**

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor