

Datasheet





0370 330 6021 www.sunbeltrentals.co.uk





MICROFLOW TOUCH

Fiber blowing machine for FTTH fibers (EPFU) and micro cables up to 6.5 mm

Equipped with a unique protection technology

The unique protection technology that stops the machine if the fiber cable meets resistance. Any obstacles are registered by a sensor and the motor stops. The machine will also stop automatically if the motor exceeds the preset maximum torque level. In both cases, the machine stops immediately so the fiber

User-friendly touch display

cable does not get damaged.

The Microflow Touch's control unit has a user-friendly touch display, which can be used to make a number of different adjustments.

Present automatic stop

The control unit can be used to presetting distance counter to stop after a certain blowing distance, making it possible to work alone.

Adjustable torque and speed control

DON'T FORGET TO ORDER

Adaptor plate set

You can choose between adaptor plates for fiber sizes 0.8-6.5 mm.

Gasket sets

You can choose between gasket sets for adaptor plates 0.8-6.5 mm.

POSSIBLE ACCESSORY ADD-ONS

Service Agreement with Extended Warranty

Valve for reverse airflow

Different variants between 5-12 mm duct.

Blowing tips

Different variants between 2-6 mm.

FlowLUB 5000

Item No.: 103-30530

A wide selection of adaptor plates for any fiber/duct sizes on request

SPECIFICATIONS

| Cable diameter. Duct diameter: Blowing distance ¹ : Blowing speed ² : Pushing force | |
|---|---|
| Voltage: Power usage Weight: Length: Width: | 8-16 bar (200-500 l/pr. min.) 100-240 V, 50-60 Hz 11.7 kg 250 mm/200 mm 150 mm/150 mm |

A quality transport box is included in the purchase.

Powered by 24V DC electric motor. Electronic control unit and electronic meter speed/counter with presetting of blowing distance.

1) Depending on type of microduct and cable.

²⁾ Cooled and dried air.



MICROFLOW TOUCH & LOG ADAPTOR PLATES


MicroFlow V5 adaptor plates

All MicroFlow machines must be fitted with adaptor plate set. All adaptor plates are replaceable, making the machine more flexible when blowing different sizes of cable.

The set consists of an upper and a lower plate, which together form a compact airtight unit around duct and fiber.

Adaptor plate set includes:

- Sensor arm kit or super straight kit size optional.
- Drive wheels with O-rings.
- · Inlet guides.

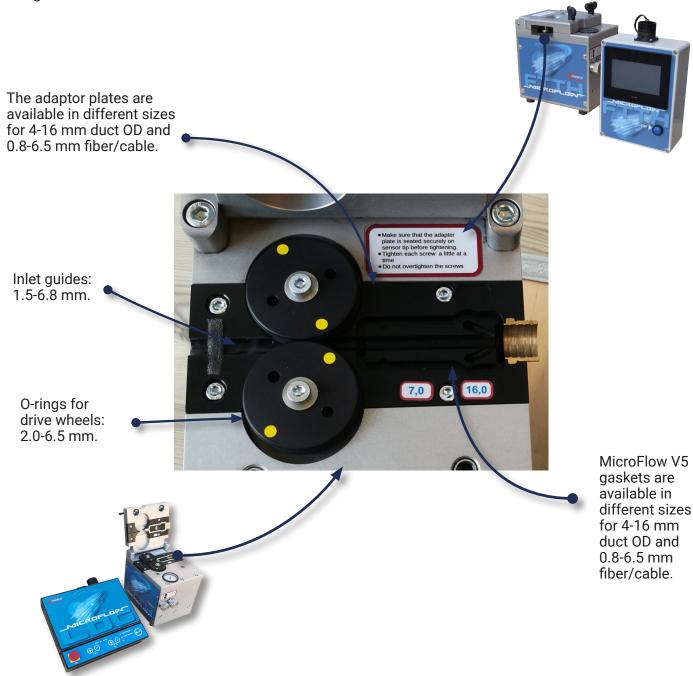



We are supporting you to deliver a world class service, every day, in every sector...

LOCATIONS

LONDON, HEATHROW

Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ 0333 122 3126

www.sunbeltrentals.co.uk/find-a-depot/london-heathrow

REDCAR

Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ 0370 330 6021

www.sunbeltrentals.co.uk/find-a-depot/teesside





STOKESLEY

Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ 01642 718 900

www.sunbeltrentals.co.uk/find-a-depot/stokesley



www.inlec.com

Order Online with Next Day Delivery, Online Chat & Online **Account Management**





View our trustpilot score











