



# Datasheet




0370 330 6021  
[www.sunbeltrentals.co.uk](http://www.sunbeltrentals.co.uk)

# Agilent Technologies

## 54520A

### Data Sheet

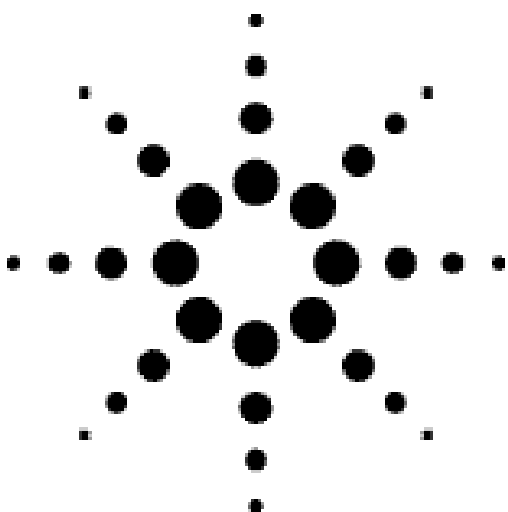

#### Product Specifications

##### General Specifications

###### Maximum Sample Rate

HP 54520A 1 GSa/s (1 CH on), 500 MSa/s (2 CH on)

###### Number of Channels (all are simultaneous acquisition)

HP 54520A: 2

###### Record Length

32,768 pts (real time) maximum

501 pts (repetitive)

###### Resolution

8 bits, 10 bits via HP-IB with averaging

##### Vertical Specifications

###### Repetitive Bandwidth

500 MHz (equivalent time) (rise time  $\leq$  700 ps)

###### Real Time Bandwidth

HP 54520A 125 MHz (2 CH) 250 MHz (1CH)

###### Sensitivity

1 mV/div to 5 V/div

###### dc Gain Accuracy

$\pm$  1.25% of full scale

###### Input Impedance

R: 1 Mohm  $\pm$  1% or 50 ohm  $\pm$  1%

C: 7 pF nominal

###### Input Coupling

ac, dc

###### Maximum Input

1 Mohm  $\pm$  250 V (dc + ac) [ac < 10 kHz]



**Agilent Technologies**

Innovating the HP Way

50 ohms: 5 V rms

#### Offset Range

Vertical Sensitivity Available Offset  
1 mV to 50 mV/div  $\pm 2$  V  
>50mV to 250 mV/div  $\pm 10$  V  
>250 mV to 1.25 V/div  $\pm 50$  V  
>1.25 V/div to 5 V/div  $\pm 250$  V

#### Offset Accuracy

$\pm(1.25\%$  of channel offset + 2% of full scale)

#### Voltage Measurement Accuracy

Dual Cursor  $\pm[(1.25\%)(\text{full scale})+(0.032)(\text{V/div})]$   
Single Cursor  $\pm[(1.25\%)(\text{full scale})+(\text{offset accuracy})+(0.016)(\text{V/div})]$

#### Horizontal Specifications

##### Time Base Range

500 ps/div to 5 s/div

#### Resolution

10 ps

#### Delta-t Accuracy

Repetitive: (> 8 averages)  $[(0.005\%)(\text{delta-t})+(100 \text{ ps} + 0.1 \% \text{ of full scale})]$   
Real Time  $[(0.005\%)(\text{delta-t})+(0.2)(\text{sample period})]$   
Peak Detect  $[(0.005\%)(\text{delta-t})+(1 \text{ sample period})]$

#### Time Tag

Resolution 100 ps

Accuracy  $\pm[0.005\%(\text{reading})+100\text{ps}]$

Delay Range (posttrigger)  $10\text{E}07 \times \text{sample period}$

Delay Range (pretrigger)  $32\text{K} \times (\text{sampleperiod})$

#### Trigger Specifications

Sensitivity dc to 100 MHz 100 MHz to 500 MHz

Internal 0.5 div 1.0 div

External (54520A)  $0.0225 \times (\text{signal range})$   $0.045 \times (\text{signal range})$

Auxiliary dc to 50 MHz: 250 mVp-p

Pulse Width (minimum) 1 ns

#### Level Range

Internal  $\pm 1.5 \times \text{full scale}$  from center screen

External (54520A)  $\pm 25\text{V}$

Auxiliary  $\pm 5\text{V}$

Modes Edge, pattern, glitch, time qualified pattern, line, state, event-delayed, time-delayed, TV (NTSC, PAL, and user-definable formats)

Trigger Coupling dc, ac, low frequency reject

#### Display Characteristics

Display Mode "A" models feature monochrome CRT (Cathode Ray Tube) displays. "C" models feature flat-panel color TFT (Thin Film Transistor) liquid-crystal displays.

Modes Averaging from 2 to 2048, envelope, infinite&

variable persistence from 500 ms to 10 s, connect the dots, peak detect

Graticules full grid, axes, frame, or no graticule  
Measurements

Automatic 23 measurements on front panel or over HP-IB:

Rise time V p-p V dc rms  
Fall time V min Preshoot  
Frequency V max Overshoot  
Period V avg Voltage at time  
- Width V base Time at min voltage  
+ Width V amptd Time at max voltage  
Duty cycle V top Time at voltage  
Delta time V ac rms

User-Definable

Both upper and lower thresholds can be set from -25% to 125% for all automatic measurements

Modes

Continuous, statistics, limit test, or waveform compare

Math/Analysis Functions Operators

add, subtract, multiply, versus, integrate, differentiate, invert magnify, and FFT

Additional Characteristics

Peak Detect Captures and displays glitches or other high-speed events as narrow as 1 ns in real-time mode at sample rates of 250 MSa/s or less with sequential single-shot turned off.

Sequential Captures successive single-shot events without Single Shot capturing the dead time in between, and stores up to 400 Kbytes of waveform data.

Sequential Single-shot Throughput

Record Waveforms Stored Max Number of  
Length Per Second Waveforms Stored  
50 1333 4395  
500 1111 739  
8000 294 49  
32,000 90 12

Waveform Store

4 nonvolatile, 2 pixel (volatile), and segmentable memory for storing measurement failure waveforms or sequential single-shot waveforms.

Screen Update Rate (typical at 500 ns/div)

record length (points)  
Real Time 500 8K 16K 32K  
updates/s. 150 110 84 58

Repetitive normal 8 avgs 128 avgs

updates/s: 150 91 91

## Optional Capabilities

### Optional Telecommunication-Mask Application

Make telecom mask-template measurements to ANSI, CCITT, and ISDN standards using the HP 54520 or 54540 series oscilloscopes equipped with Option 001. Option 001 features 21 standard masks stored on a flexible disk. You can automatically trigger on positive isolated ones in live traffic for many standard telecom signals. The scope will automatically best-fit the test signal to many masks and give automatic pass-fail comparisons of the mask to its corresponding input signal.

For more information on Option 001, Telecommunications Masks Applications ask your HP Sales representative for HP Product Overview 5963-1859E (international version) or 5963-1859 EUS (US version).

### Optional Active Probing

The HP 1144A active probe features 800-MHz bandwidth, 2-pF input capacitance, and 1-Mohm input resistance. The HP 1145A two-channel active probe features 750-MHz bandwidth, 2-pF input capacitance, and 1 Mohm input resistance and is designed for easy connection to surface mount devices.

### I/O Characteristics

HP-IB Fully programmable, complies with IEEE 488.2  
RS-232 Bidirectional serial communication  
Centronics Talk-only parallel communication for HP PCL compatible printers

### Hardcopy Supported Printers

Color "C" Models Monochrome "A" Models  
HP 540 Centronics Thinkjet HP-IB, RS232  
HP 560C Centronics HP 540 Centronics  
HP 560C, Centronics  
B/W only

### Supported Plotters:

HP Color Pro HP-IB HP 7440A HP-IB  
HP 7475A HP-IB HP 7475A HP-IB  
HP 7470A HP-IB HP 7470A HP-IB  
HP 7550A HP-IB HP 7550A HP-IB

### Disk Drive

DOS-compatible, 3-1/2" disk drive to store and recall setups, waveforms, and screen images (TIFF, PCX, and EPS). The disk drive is also utilized to download the oscilloscope's operating-system software and can be used to upgrade the scope's software as future upgrades become available. A free software-upgrade notification service is offered to registered users.

### Front Panel Setups

9 (nonvolatile memories)

### FFT Characteristics

Frequency Range dc to:

500MHz (1 ch)  
250MHz (2 ch)

**Frequency Resolution:**

Minimum (max samp rate)/(512 pts):  
977 kHz (2ch)  
1.95 MHz (1 ch on)

Maximum (min samp rate)/(32,768 pts):  
0.305 MHz

**Horizontal Magnify**

Specify the frequency that is displayed at center screen, and magnify the frequency-domain display about that point.

**Frequency Accuracy**

$[1/2 (\text{sample frequency}) (1/32768)] +$   
 $(5 \times 10E-5)(\text{signal frequency})$

**Amplitude Display**

Power in dBm

**Windowing**

Hanning, Flattop, Rectangular

**Environmental Characteristics**

Power Voltage 115/230 Vac, -25% to +15%, 48 to 440Hz,  
350 VA maximum

Weight Net: approximately 11.8 kg (26lb)

Shipping: Approximately 21.3 kg (47 lb)

Dimensions Height: 218 mm (8.6 in)

Width: 440 mm (17.3 in)

Depth: 367 mm (14.5 in)

We are supporting you to deliver  
a world class service, every day,  
in every sector...

## LOCATIONS

### LONDON, HEATHROW

#### Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ

0333 122 3126

[www.sunbeltrentals.co.uk/find-a-depot/london-heathrow](http://www.sunbeltrentals.co.uk/find-a-depot/london-heathrow)

### REDCAR

#### Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ

0370 330 6021

[www.sunbeltrentals.co.uk/find-a-depot/teesside](http://www.sunbeltrentals.co.uk/find-a-depot/teesside)

### STOKESLEY

#### Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ

01642 718 900

[www.sunbeltrentals.co.uk/find-a-depot/stokesley](http://www.sunbeltrentals.co.uk/find-a-depot/stokesley)



[www.inlec.com](http://www.inlec.com)

Order Online with Next Day  
Delivery, Online Chat & Online  
Account Management



★ Trustpilot

View our trustpilot score



STOKESLEY  REDCAR

 HEATHROW

0370 330 6021

[instrumentation@sunbeltrentals.co.uk](mailto:instrumentation@sunbeltrentals.co.uk)

[testequipment@sunbeltrentals.co.uk](mailto:testequipment@sunbeltrentals.co.uk)

[www.sunbeltrentals.co.uk](http://www.sunbeltrentals.co.uk)

