



Datasheet



0370 330 6021

www.sunbeltrentals.co.uk

HVA68-2

DOUBLE POWER

VLF High Voltage Test Set

- VLF pure sinusoidal voltage
- VLF rectangular voltage
- DC voltage
- $2\mu\text{F}$ @ $0,1\text{Hz}$ @ 44kV_{rms}
- Sheath Test
- Sheath Fault Location Mode
- Vacuum Bottle Test
- Patented Technology

The compact design and unmatched high voltage output power to weight ratio of the HVA test sets are second to none in the market, and make the b2 electronic high-voltage generators the lightest in all classes at all voltage levels.


Performance - With $2\mu\text{F}$ @ $0,1\text{Hz}$ @ 44kV_{rms} HVA68-2 has double the power with no increase in size or weight

Dry system - The HVA68-2 test set is a dry type test system - with no oil filled components. This means less maintenance, compact and lightweight design and no limitation of operating time.

Safety - The instrument has two independent earthing devices (electronic and mechanical discharging) and a 12 kV feedback protection system to protect both operator and instrument.

Connectivity - On site, no external PC is needed. All results can be downloaded later by USB for further investigation and easy report creation on the PC software.

Solid HV connectors - Robust HV-connectors allow the use of different HV test lead lengths, the quick exchange for a replacement cable, or the simpler upgrade path for connection of diagnostic systems.

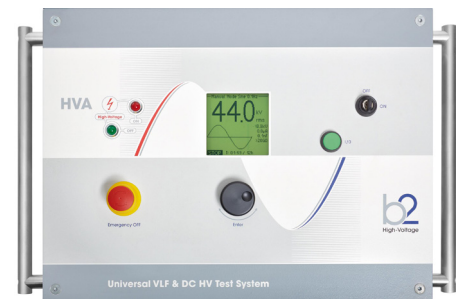

Features

- Output voltage $48\text{ kV}_{\text{rms}}$
- Pure sinusoidal output voltage (load-independent)
- Output current 80 mA max.
- Highest test capacity of $10\mu\text{F}$
- Unlimited and continuous duty cycle
- Cable testing according: CENELEC HD 620/621, IEEE 400.2-2004, IEC60502-2:2014
- Programmable test sequences
- PC software "b2 Control Center" with various reporting functions included
- Upgradable with Partial Discharge diagnostic and Tan Delta Diagnostics System (optional)
- 12kV transient protection (50 Hz)
- Dual Discharge Device (DDD®), two integrated and automatic discharge devices
- Easily exchangeable HV cable
- Real time oscilloscope display of output voltage
- Breakdown voltage and load detection (R and C)
- RMS digital metering of voltage and current
- Vacuum Bottle Test
- Sheath Fault Locating (in combination with Earth Fault Locator) (not included)

www.b2hv.at

b2
electronicgmbh

HVA68-2

DOUBLE POWER



smallest and lightest
VLF cable test set



dry system



unlimited operating
time



Transportbox (optional)

HVA68-2		
Article number	SH0268	
Input Voltage	190 – 240 V, 50/60 Hz, 3 kVA	
Output Voltage	Sinusoidal	48 kV rms, 68 kV peak
	DC	± 0 – 60 kV
	Squarewave	0 - 60 kV
	Accuracy	± 1%
	Resolution	0.1 kV
Output Current	0 – 80 mA (Resolution 1 µA) Accuracy: ±1%	
Resistance Range	0.1 MΩ...5 GΩ	
Output Frequency	0.01 ... 0.1 Hz in steps of 0.01 Hz (default 0.1 Hz) - auto frequency	
Output Load	2.0 µF @ 0.1 Hz @ 44 kV rms	
	1.6 µF @ 0.1 Hz @ 48 kV rms	
	5.0 µF @ 0.03 Hz @ 48 kV rms	
	10.0 µF maximum Capacitance! ¹	
Sheath Test	Unmax	10 kV
	Trip Current	0.1 mA – 5.0 mA
Sheath Fault Location ²	Unmax	10 kV
	Pulse/Period	1:3 / 4 s, 1:5 / 4 s, 1:5 / 6 s, 1:9 / 6 s
Output Modes	AC (VLF) Symmetrical and load independent across full range, DC (plus or negative polarity), Burn-/Fault Condition or Fault Trip Mode, Jacket / Sheath Testing	
Safety	50 Hz 12 kV Feedback Protection / Dual Discharge Device (internal)	
Memory	50 Test Record Stored USB almost unlimited	
Metering	Voltage and Current (True rms and / or peak), Capacitance, Resistance, Time, Flashover Voltage	
HV-Cable	5 m with MC contact and alligator clamps	
Software	"b2 Control Center" (included)	
Computer interfaces	RS232	standard
	USB	Flash Drive
Dimensions	L 450 x W 340 x H 520 mm	
Weight	57 kg	
Environmental conditions	Storage:	-25°C to + 70°C
	Operating:	-10°C to + 50°C
	Humidity:	5-85% non condensing

¹ at lower frequency and voltage | ² in combination with locating device (not in scope of supply)

DHV1378 Rev04 - ENGLISH - Subject to alternations. Errors excepted. Illustrations are not binding.



Riedstrasse 1 | A-6833 Klaus
+43 (0) 5523 57373 | info@b2hv.at

Options

- External Tan Delta Diagnostics System TD60 / TD60-MC
- Partial Discharge with integrated Tan Delta Diagnostics System PDTD60-2

Scope of delivery

- HVA68-2 Testing Device
- PC Software - b2 ControlCenter
- HV cable 5 m
- Power and earthing cable
- USB Stick
- Operating Manual

We are supporting you to deliver
a world class service, every day,
in every sector...

LOCATIONS

LONDON, HEATHROW

Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ

0333 122 3126

www.sunbeltrentals.co.uk/find-a-depot/london-heathrow

REDCAR

Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ

0370 330 6021

www.sunbeltrentals.co.uk/find-a-depot/teesside

STOKESLEY

Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ

01642 718 900

www.sunbeltrentals.co.uk/find-a-depot/stokesley



www.inlec.com

Order Online with Next Day
Delivery, Online Chat & Online
Account Management



★ Trustpilot

View our trustpilot score



STOKESLEY  REDCAR

 HEATHROW

0370 330 6021

instrumentation@sunbeltrentals.co.uk

testequipment@sunbeltrentals.co.uk

www.sunbeltrentals.co.uk

