



Datasheet



0370 330 6021
www.sunbeltrentals.co.uk

GE Energy



CSU600A™

CSU600AT™

Current Supply Units
Programma® Products



imagination at work

CSU600A™/600AT™



Current Supply Units

These high-current supply units have two main fields of application. The first is to conduct primary tests on protective relays. A primary test shows whether all parts of the protection system are functioning together properly within the specified time limits under operating conditions.

The second field of application involves conducting current tests on low-voltage circuit breakers and overcurrent devices.

The CSU600A™ is a compact instrument which, together with Timer TM200™ and an external ammeter, meets stringent requirements for accuracy, easy handling and performance. This current supply unit is ideal for a) performance and turn-ratio tests of current transformers, b) primary tests of protective relays, c) current tests on low- and high-voltage circuit breakers and d) commissioning tests that require variable currents.

The more sophisticated CSU600AT™ provides a more comprehensive solution. It has a built-in timer and an analog ammeter that provide rough current settings quickly and easily. As a result, connection time has been reduced to the bare minimum.

The CSU600A™ and CSU600AT™ current supply units have an excellent weight/performance ratio.


Application example

IMPORTANT!

Read the User's manual before using the instrument.

Primary test of protective relay equipment and low-voltage circuit breaker

1. Connect the CSU600A's current outputs across the current transformer (diagram a) or to the breaker terminals (diagram b).
2. Connect Timer TM200's start input to output T and the stop input to the protective relay equipment's auxiliary contact.
3. Set the current.
4. Execute the test.
5. Read the time from Timer TM200.

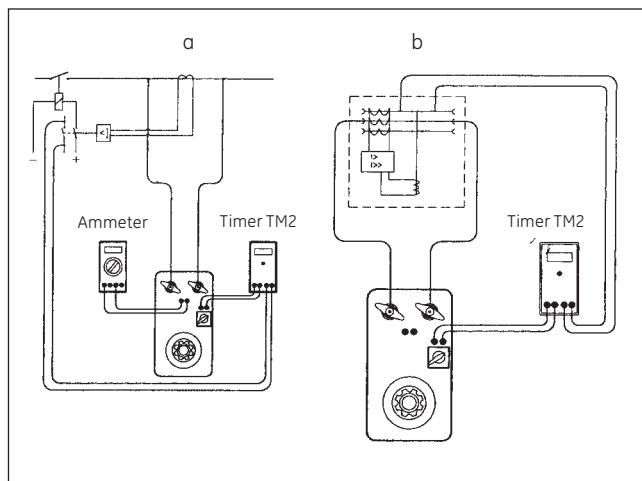

Optional accessories

Cable set (for 115 V), 2 x 5 m (16 ft), 70 mm²

Weight: 8.4 kg (18 lbs)

Cable set, 2 x 10 m (33 ft), 70 mm²

Weight: 16.8 kg (37 lbs)

Cable set, 2 x 15 m (49 ft), 95 mm²

Weight: 29.4 kg (65 lbs)

TM200

External timer

See the TM200 product pages for more information

Specifications CSU600A/AT

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

Application field	The instrument is intended for use in high-voltage substations and industrial environments.
Temperature	
Operating	0°C to +50°C (32°F to +122°F)
Storage & transport	-40°C to +70°C (-40°F to +158°F)
Humidity	5% – 95% RH, non-condensing

CE-marking

LVD	Low Voltage Directive 73/23/ EEC am. by 93/68/EEC
EMC	EMC Directive 89/336/EEC am. by 91/263/EEC, 92/31/EEC and 93/68/EEC

General

Mains voltage	115 or 230 V AC, 50/60 Hz
Power consumption (max)	115 V, 667 VA cont. (interm. 3738 VA) 230 V, 851 VA cont. (interm. 6440 VA)
Protection	Thermal cut-outs and miniature circuit breakers
Dimensions	
Instrument	356 x 203 x 241 mm (14.0" x 8.0" x 9.5")
Transport case	610 x 290 x 360 mm (24.0" x 11.4" x 14.2")
Weight	21.9 kg (48 lbs) 38.3 kg (84.4 lbs) with accessories and carrying case
Current cables	2 x 5 m (16 ft), 50 mm²

Measurement section

Ammeter	Built-in, 0 – 600 A (only on CSU600AT) Output for external ammeter
Current transformer	500/5 A, class 0.5

Timer (only CSU600AT)

Range	0-999.999 s
Resolution	1 ms
Inaccuracy	±0.02% of shown value + 0 to 2 ms

Other

Output for starting external timer

Outputs, AC, intermittent output ¹⁾ (CAT II)

115 V mains voltage		230 V mains voltage		
Current	Load time	Minimum output voltage	Load time	Minimum output voltage
0 A	Cont.	6.0 V	Cont.	9.5 V
75 A	–	–	Cont.	9.3 V
100 A	Cont	5.6 V	1 h	9.0 V
200 A	15 min	5.3 V	5 min	8.5 V
300 A	1.5 min	4.9 V	2 min	8.0 V
400 A	1 min	4.6 V	1 min	7.5 V
500 A	20 s	4.2 V	30 s	7.0 V
600 A	15 s	3.9 V	20 s	6.5 V

1) Maximum load time from cold state 25°C (77°F). Not valid for repeated tests.

Maximum cable lengths at 600 A

115 V mains	2 x 5 m (16 ft), 70 mm²
230 V mains	2 x 5 m (16 ft), 50 mm² 2 x 10 m (33 ft), 70 mm² 2 x 15 m (49 ft), 95 mm²

Ordering information

CSU600A

Art.No.

Complete with:

Cable set GA-05052

Transport case GD-00182

115 V Mains voltage

BF-11190

230 V Mains voltage

BF-12290

CSU600AT

Complete with:

Cable set GA-05052

Transport case GD-00182

115 V Mains voltage

BF-21190

230 V Mains voltage

BF-22290

Optional accessories

Cable set 5 m (for 115 V)

GA-07052

Cable set 10 m

GA-07102

Cable set 15 m

GA-09152

TM200

BE-29090



Cable set GA-05052

Programma Electric AB
Eldarvägen 4
SE-187 75 TÄBY
Sweden

Tel +46 8 510 195 00
Fax +46 8 510 195 95
E-mail programma@ge.com
Internet www.gepower.com

NOTICE OF COPYRIGHT & PROPRIETARY RIGHTS

© 2005, Programma Electric AB. All rights reserved.

The contents of this document are the property of Programma Electric AB. No part of this work may be reproduced or transmitted in any form or by any means, except as permitted in written license agreement with Programma Electric AB.

Programma Electric AB has made every reasonable attempt to ensure the completeness and accuracy of this document. However, the information contained in this document is subject to change without notice, and does not represent a commitment on the part of Programma Electric AB.

TRADEMARK NOTICES

Programma® is a registered trademark of Programma Electric AB. IEEE® is claimed as a registered trademark by the Institute by Electrical Electronics Engineers, Inc. The GE logo is registered trademark of General Electric Company.

All other brand and product names mentioned in this document are trademarks or registered trademarks of their respective companies.

Programma Electric AB is certified according to ISO 9001.



**We are supporting you to deliver
a world class service, every day,
in every sector...**

LOCATIONS

LONDON, HEATHROW

Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ

0333 122 3126

www.sunbeltrentals.co.uk/find-a-depot/london-heathrow

REDCAR

Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ

0370 330 6021

www.sunbeltrentals.co.uk/find-a-depot/teesside

STOKESLEY

Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ

01642 718 900

www.sunbeltrentals.co.uk/find-a-depot/stokesley



www.inlec.com

Order Online with Next Day
Delivery, Online Chat & Online
Account Management



View our trustpilot score



STOKESLEY  REDCAR

 HEATHROW

0370 330 6021
instrumentation@sunbeltrentals.co.uk
testequipment@sunbeltrentals.co.uk
www.sunbeltrentals.co.uk

