

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

NIM1000

Impedance Meter



- **Measures the grid impedance of the phase and neutral conductor up to the 10th harmonic**
- **Triggers load-sensitive and neutral faults**
- **Performs multi-phase measurements and switches automatically between the test points**
- **Is highly accurate and simple to operate**

DESCRIPTION

With up to 1kA test current, the NIM 1000 measures the loop impedance to detect malfunctions in the LV grid at an early stage.

The impedance meter triggers load-sensitive and neutral faults, detects weak contacts, and exposes hidden flaws. Depending on the grounding conditions of the tested grid, a multi-phase measurement calculates the impedance of the neutral conductor to detect defects that can cause severe safety issues.

NIM 1000 is a versatile device: it measures the current capacity under real-life conditions, determines the voltage dip resulting from a given load, and performs tests on cables, power supply lines, and bus-bars. Those tests help determine the correct dimensioning of the installations, ensure a consistently good power quality, and prevent downtimes.

The collected data provide a comprehensive and reliable evaluation of the power grid in terms of current load capacity and voltage fluctuations under load.

A common cause for voltage fluctuations are electronic loads and converters. Those generate strong harmonic currents that add to the base frequency, elevating the load significantly.

To find out how the grid performs under load, the NIM 1000 measures the complex impedance up to the 10th harmonic.

With its simple operation, handy size, and bright color display, NIM 1000 is a user-friendly device, developed specifically for the needs of LV utilities and their testing technicians who work in today's demanding and competitive market conditions.

SPECIFICATIONS

General

The NIM 1000 is connected to the LV grid by fused test leads. Those, in turn, supply the impedance meter with power. The connection is single- to multi-phase. The impedance meter can perform single measurements, multiple measurements with averaging, or automatic long-term measurements. To prepare a test sequence, the user can enter either a defined time frame or a specific amount of tests.

To determine the grid impedance, a solid-state relay with a load resistor generates the pre-selected load current. A/D converters are employed to record the voltage and current traces before and during the measurement. The internal processing unit evaluates the data and the results are displayed graphically and numerically. For multi-phase measurements the impedance meter switches automatically between the test points.

For troubleshooting, the NIM 1000 has an additional operation mode, where the load current is gradually increased to the nominal pre-selected value. Hidden and load-dependent faults can be detected by comparing different impedance values (between different load currents or different phases).

Technical Data

Test current range

80 A ... 1,000 A (adjustable)

Maximum current (peak) I_{max} (depends on the grid impedance)

≤ 1000 A @ 400 V

≤ 600 A @ 230 V

≤ 300 A @ 115 V

Test parameter

Z = Impedance (value and phase)

R = Resistance (real part)

X = Reactance (imaginary part)

Z_{PEN} = Impedance value PEN (calculated)

Z, R, X and Z_{PEN} are displayed for the power frequency up to the 10th harmonic (phase-N, phase-phase)

U_{rms} = RMS voltage

I_{max} = max. test current

I_s = Short circuit current

S_{KV} = Continuous short circuit power

f = Net frequency

V_D = Voltage drop at nominal connected power (in %)

P_{max} = max. connected power at nominal voltage drop

Input voltage (serves as supply voltage)

90 V ... 480 V, 50/60 Hz (at test clamps)

90 V ... 230 V, 50/60 Hz (at power outlet)

Operational accuracy B (acc. to EN 61557-3)

3% ± 1 digit (at sufficient test current)

Test range (at the above accuracy)

10 mΩ .. 5 Ω (230 V / 400 V)

10 mΩ .. 2,5 Ω (115 V)

Resolution

1 mΩ.

Test Category

300V CAT IV

Safety functions

Temperature monitoring, Fused clamps

Display

Sunlight-readable 5,7" TFT, 640 x 480 pixels

Memory

Min. 1000 test records

Interface

USB 2.0

Physical

Dimensions

410 x 175 x 335 mm

Environmental

Operating Temperature

-20°C ... 55°C

Storage Temperature

-30°C ... 70°C

Humidity

Max. relative humidity 93% at 30°C

Protection


Protection class (IEC 61140, DIN VDE 0140-1)

Insulated acc. to protection class II

IP-Protection (IEC 60529, DIN VDE 0470-1)

IP 50 (lid open)

IP 53 (lid closed)

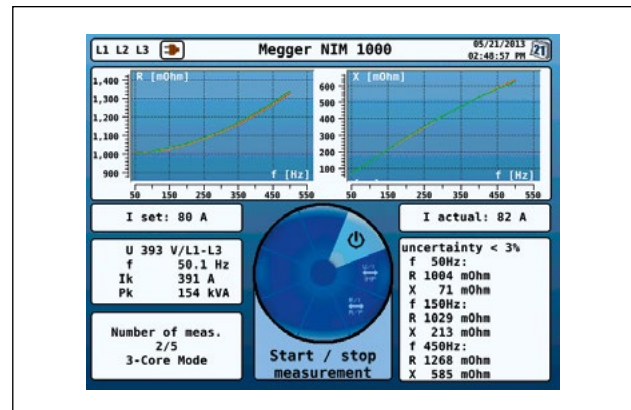

ORDERING INFORMATION

Item	Cat. No.
NIM 1000	128312147
4 x Kelvin clamps with 3m test leads	
Adapter NIM 1000-A for tests on Schuko outlets	
USB-Stick 2 GB for transfer of data to PC	
Set of spare fuses and clamps	
Options	
User's manual NIM 1000 English	82941
User's manual NIM 1000 German	82940
Spare Kelvin clamp with leads	138315892

UK

Archcliffe Road, Dover
CT17 9EN England
T +44 (0) 1 304 502101
F +44 (0) 1 304 207342
UKsales@megger.com

SEBAKMT


Dr.-Herbert-Iann-Str. 6
96148 Baunach/Germany
T +49 (0) 95 44 6 80
F +49 (0) 95 44 22 73
sales@sebakmt.com

Registered to ISO 9001:2000 Cert. no. 10006.01

www.megger.com

Megger is a registered trademark
Specifications are subject to change
without notice.

INLEC, supporting you to deliver a world class service, every day, in every sector ...

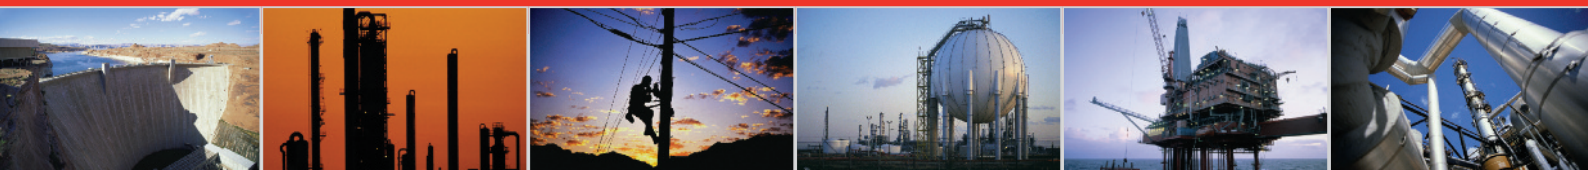

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor