

# Datasheet





0370 330 6021 www.sunbeltrentals.co.uk

#### Extensive range of accessories

ACTAS BTT comes complete with a full set of accessories which includes all the cables, adapters and crocodile clamps required. The cable sets are fitted with 4 mm safety plugs for connection to the switchgear device.



#### Technical data

IGBTs for controlling	Voltage	300 VAC/DC
the release coils	Current	20 A
	Accuracy	< 0.1 ms
Voltage detector Control outputs	12300 V AC/DC	
Binary inputs	Main contacts	3
	Auxiliary inputs	1
	Resolution	0.01 ms
	Accuracy	0.5% of range
Coil current	Measuring range	20 A
	Resolution	10 mA
	Accuracy	0.5% of range
Connection sockets	1 x control outputs coils	
	1 x binary inputs main contacts/AUX	
User interfaces	Control panel with graphical display, one-handed operation, separate key	
	for each test mode	ion, separate key
Communication	Bluetooth/Android	
External power supply unit	24 V / 0.5 A DC; 30 W max.	
Integrated batteries	Microprocessor-controlled monitoring Battery life for up to 12 hours	
Dimensions	100 x 230 x 35 mm (W x H x D)	
Weight Measuring device	0.5 kg	
Weight Cables	0.9 kg	
Protection	IP54	
Ambient temperature	-550°C	
Relative humidity	595%	

#### KoCoS Messtechnik AG

Südring 42 34497 Korbach, Germany Tel. +49 5631 9596-40 info@kocos.com

For more information, go to:

www.kocos.com



## ACTAS BTT ACTAS BTT **High-precision, battery-operated** timing analyser ACTAS BTT is a battery-operated, hand-held measuring

 $\Box$ 

<u>M</u>

ACTAS BTT is a battery-operated, hand-held measuring device which can determine operating times, contact synchronicity, sequence time and coil currents extremely quickly and easily. Thanks to this extensive functionality and its high measurement accuracy, ACTAS BTT can be put to a wide range of different uses when measuring the operating times of low-, medium- and high-voltage switch-gear devices, relay contacts, contactors and switch disconnectors, to mention but a few applications.

- Determination of operating times
- Test for contact synchronicity
- Determination of CO sequence time
- Measurement of coil currents
- Compact, ergonomic design
- Battery operation for up to 12 hours
- Easy-to-read graphical display
- Status display for inputs and outputs
- Bluetooth incl. remote control function for Android

KOCOS 356

#### Determination of operating times

ACTAS BTT features one output for controlling the OPEN coils and one output for controlling the CLOSE coils of a switchgear device. Both outputs can be used to control DC- and AC-operated coils. The determination of operating times can be carried out simply and reliably on up to three main contacts by triggering C, O and CO switching operations. The clear graphical display shows the corresponding operating times for all the binary inputs as the result.

#### Test for contact synchronicity

As well as determining the operating times, ACTAS BTT also establishes the synchronicity of the opening and closing operations of the main contacts.

When assessing a switchgear device, for example, this allows determination of the time interval between the first and last contact touch of the poles during a closing or opening operation in a three-phase grid.

#### Measurement of coil currents

The coil current is measured automatically during the measurement of the operating times. Both the mean and the peak value are displayed as the result, allowing assessment of the mechanical and/or electrical functioning of the release coils.

#### Protected inputs and outputs


The inputs and outputs are galvanically isolated and protected against overvoltage. The outputs are also protected against overload and overheating.

#### Real-time display

All the inputs and outputs of the device are controlled in real time and their status is shown on the display.

#### Check for the control voltage of the switchgear device

The integrated monitoring unit indicates whether the control voltage is applied to the CLOSE and OPEN coils of the switchgear device. Incorrect connection of the measuring device or faulty cables are also reliably detected in this way.

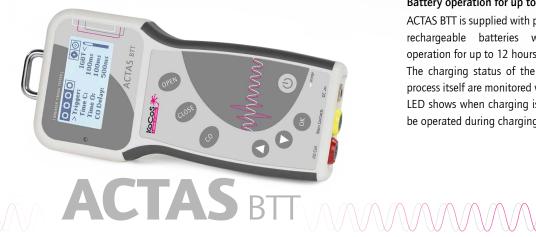

#### Compact, ergonomic design

Thanks to its compact, ergonomic design, the measuring device can be held and operated with just one hand. Acoustic signals and a graphical display which is even easy to read in direct sunlight make the device user-friendly.

#### Easy operation

The measuring device features dedicated keys for each test mode. The ergonomic arrangement of the keys makes for optimum handling, measurements can be carried out quickly and easily. ACTAS BTT is designed for stand-alone operation or for operation with an Android smartphone. Test reports can be generated, saved and sent using a smartphone.

#### Battery operation for up to 12 hours

ACTAS BTT is supplied with power by means of integrated rechargeable batteries which provide continuous operation for up to 12 hours.

The charging status of the batteries and the charging process itself are monitored with a microprocessor and an LED shows when charging is in progress. The device can be operated during charging.







Times C
Col A: 18.69 ms
Col B: 18.45 ms
Col C: 18.22 ms
Sync: 0.47 ms









We are supporting you to deliver a world class service, every day, in every sector...

### **LOCATIONS**

#### LONDON, HEATHROW

Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ 0333 122 3126

www.sunbeltrentals.co.uk/find-a-depot/london-heathrow

#### **REDCAR**

Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ 0370 330 6021

www.sunbeltrentals.co.uk/find-a-depot/teesside





#### **STOKESLEY**

Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ 01642 718 900

www.sunbeltrentals.co.uk/find-a-depot/stokesley



www.inlec.com

Order Online with Next Day Delivery, Online Chat & Online **Account Management** 





View our trustpilot score











