



# Datasheet



0370 330 6021  
[www.sunbeltrentals.co.uk](http://www.sunbeltrentals.co.uk)

# PCU1/E CIT

# Primary Current Injection Systems



### Features (CIT & PCU1/E)

- 6.9kVA output capability
- Continuously variable output
- Multi-function digital timing system
- Digital true RMS memory ammeter
- Automatic switch-off at end of test
- Loading units from 500A-3000A
- Low impedance, dual-range outputs
- Rugged, compact design

### PCU1/E Additional Features

- Secondary injection up to 100A
- Digital true RMS voltmeter

The CIT & PCU1/E Mk5 primary current injection systems are ideally suited to commissioning and maintenance testing where high currents up to 3000A are required. The systems consist of separate control and loading units for maximum flexibility. The control unit contains all controls and displays, linking to the loading unit by control and metering cables. The combination of the CIT or PCU1/E and a suitable loading unit is ideal for all low power primary current injection tasks up to 3000A, including testing under and over current relays, circuit breakers and CT ratio testing. Where higher power is required, the PCU2/E and associated loading units can inject currents up to 6000A at 20kVA.

The control units are rated at 6.9kVA, and have digital metering. A memory facility is provided on the metering to hold the current reading when the output trips or is switched off. The current is automatically switched off when the device under test trips.

The CIT & PCU1/E have a flexible timing system, allowing timing tests to be carried out to a resolution of 1ms. Selection for normally open or normally closed contacts is automatic, and the status of the contacts is shown on the front panel. Timing modes are available to test under and over current devices, re-closers, under and over voltage devices, and many current trips and circuit breakers.

| Feature             | CIT | PCU1/E |
|---------------------|-----|--------|
| Primary injection   | ü   | ü      |
| Secondary injection | ü   | ü      |

Four loading units are available, delivering output currents between 250A and 3000A. Each loading unit has two outputs which may be connected in series or parallel for maximum flexibility. For example, the LU3000LP may be configured to either give a maximum current of 1500A at 4V or 3000A at 2V. A full range of output leads are available to complement the CIT, PCU1/E and loading units.



# T&R Test Equipment Ltd



## CIT / PCU1/E Control Unit Specification

### Loading Unit Output

| Voltage | Current (cont.) | Current (5 min on/15 off) |
|---------|-----------------|---------------------------|
| 0-230V  | 0-15A           | 0-30A                     |

### Loading Unit Current Metering

The AC output current is metered by a true RMS 4 digit memory ammeter (acquisition time 200ms) with an LED display.

| Loading unit | Full scale | Resolution | Accuracy    |
|--------------|------------|------------|-------------|
| LU500        | 500.0A     | 0.1A       | ±0.6%rdg+6d |
| LU1000       | 1000A      | 1A         | ±0.6%rdg+6d |
| LU2000       | 2000A      | 1A         | ±0.6%rdg+6d |
| LU3000LP     | 3000A      | 1A         | ±0.6%rdg+6d |

### Timing System

The CIT & PCU1/E have a flexible timing system with two contact inputs and 5 operating modes. Both the start and stop contact circuits will accept volt free contacts or contacts connected to a dc voltage system (220V max). Each contact circuit automatically selects for N/O or N/C contacts, and the status of each contact input is shown by an LED. The timing channels may also be triggered by a dc voltage between 24 and 240V. The timing system will also respond to the rise and fall of current in the test object for devices where no auxiliary contact is available.

|                     |                                |
|---------------------|--------------------------------|
| Timer resolution    | 1ms                            |
| Timer full scale    | 999.999s                       |
| Timer accuracy      | ±0.01%rdg+2d (3d current mode) |
| Contact O/C voltage | 24V                            |
| Contact S/C current | 100mA                          |
| Vdc input range     | 24-240Vdc                      |

| Timer mode            | Timer start      | Timer stop     |
|-----------------------|------------------|----------------|
| Internal Start        | 'On' button      | Contact        |
| Single contact        | Contact 1        | Contact 1      |
| Dual contact          | Contact 1        | Contact 2      |
| Current operated 50%  | Current >10%     | Current <10%   |
| Current operated 100% | Current >20%     | Current <20%   |
|                       | of meter range   | of meter range |
| Off                   | Setting position |                |

### Secondary Injection Output (PCU1/E only)

The secondary current injection output on the unit has two taps, allowing the injection of currents up to 100A.

| Output Range | Continuous current | Intermittent current<br>5min on/15 min off |
|--------------|--------------------|--|
| 0-5V         | 0-50A              | 0-100A                                     |
| 0-10V        | 0-25A              | 0-50A                                      |

| Metering Range | Full scale | Resolution | Accuracy    |
|----------------|------------|------------|-------------|
| 0-10V 50A      | 50.00A     | 0.01A      | ±0.6%rdg+6d |
| 0-5V 100A      | 100.0A     | 0.1A       | ±0.6%rdg+6d |

### Voltage Output (PCU1/E only)\*\*

| Voltage | Current (cont.) | Current (5 min on/15 off) |
|---------|-----------------|---------------------------|
| 0-230V  | 0-15A           | 0-25A                     |

Voltage and current metering are provided on the voltage output with 300.0V and 30.00A full scale and ±0.6%rdg+6d accuracy.

\*\* The PCU1/E voltage output is not isolated from the supply.

## Supply Requirements

230V±10%, 45-65Hz 1ph 7.2kVA max

### Dimensions

490mm x 300mm x 300mm

### Weight

CIT:29kg, PCU1/E: 35kg

### Temperature Range

Storage -20°C to 60°C, Operating 0°C to 45°C

### Protection and Safety

The CIT, PCU1/E and loading units are CE marked and are designed to meet the requirements of BS EN61010. The system is protected by electronic trips on the outputs, circuit breakers on the mains input and control unit output, and fuses on the contact inputs.

### Control Unit Standard Accessories

Mains lead (2m), loading unit power and metering leads (5m), operating manual and spare fuses.

### Optional Loading Unit Specifications

Loading units are available to increase the output capabilities of the unit with a range of current ratings. The output of the loading unit is isolated, and consists of two windings which may be connected in series or parallel. All metering functions are handled by the control unit.

#### Loading unit intermittent ratings (5 min on/15 off)

| Unit     | Series connection |         | Parallel connection |         | Max |
|----------|-------------------|---------|---------------------|---------|-----|
| Type     | Current           | Voltage | Current             | Voltage | kVA |
| LU500    | 0-250A            | 0-8V    | 0-500A              | 0-4V    | 2   |
| LU1000   | 0-500A            | 0-8V    | 0-1000A             | 0-4V    | 4   |
| LU2000   | 0-1000A           | 0-6V    | 0-2000A             | 0-3V    | 6   |
| LU3000LP | 0-1500A           | 0-4V    | 0-3000A             | 0-2V    | 6   |

#### Loading unit continuous ratings

| Unit     | Series connection |         | Parallel connection |         | Max |
|----------|-------------------|---------|---------------------|---------|-----|
| Type     | Current           | Voltage | Current             | Voltage | kVA |
| LU500    | 0-125A            | 0-8V    | 0-250A              | 0-4V    | 1   |
| LU1000   | 0-250A            | 0-8V    | 0-500A              | 0-4V    | 2   |
| LU2000   | 0-500A            | 0-6V    | 0-1000A             | 0-3V    | 3   |
| LU3000LP | 0-750A            | 0-4V    | 0-1500A             | 0-2V    | 3   |


#### Unit Dimensions Weight

| Unit     | Dimensions        | Weight |
|----------|-------------------|--------|
| LU500    | 290 x 320 x 425mm | 29kg   |
| LU1000   | 290 x 320 x 425mm | 37kg   |
| LU2000   | 290 x 320 x 425mm | 45kg   |
| LU3000LP | 290 x 320 x 475mm | 52kg   |

### Optional Output Lead Set Specifications

A range of output lead sets are available in a range of lengths to complement the CIT / PCU1/E system:

| Type      | Length   | CSA                | Termination |
|-----------|----------|--------------------|-------------|
| 500AL     | 1m to 5m | 70mm <sup>2</sup>  | Ring crimp  |
| 1000AL    | 1m to 5m | 140mm <sup>2</sup> | Copper bar  |
| 2000AL    | 1m to 5m | 280mm <sup>2</sup> | Copper bar  |
| 3000AL-LP | 1m to 2m | 420mm <sup>2</sup> | Copper bar  |

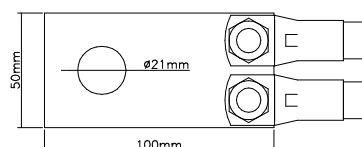

1000AL-3000AL  
copper bar  
termination

**We are supporting you to deliver  
a world class service, every day,  
in every sector...**

## LOCATIONS

### LONDON, HEATHROW

#### Sunbelt Rentals UK Test & Monitoring

242-252 London Road, Staines, London TW18 4JQ

0333 122 3126

[www.sunbeltrentals.co.uk/find-a-depot/london-heathrow](http://www.sunbeltrentals.co.uk/find-a-depot/london-heathrow)

### REDCAR

#### Sunbelt Rentals UK Test & Monitoring

Unit 5 Kirkleatham Business Park, Redcar TS10 5SQ

0370 330 6021

[www.sunbeltrentals.co.uk/find-a-depot/teesside](http://www.sunbeltrentals.co.uk/find-a-depot/teesside)

### STOKESLEY

#### Sunbelt Rentals UK Test & Monitoring

2 Ellerbeck Way, Stokesley Business Park, Stokesley, North Yorkshire TS9 5JZ

01642 718 900

[www.sunbeltrentals.co.uk/find-a-depot/stokesley](http://www.sunbeltrentals.co.uk/find-a-depot/stokesley)



[www.inlec.com](http://www.inlec.com)

Order Online with Next Day  
Delivery, Online Chat & Online  
Account Management



View our trustpilot score



STOKESLEY  REDCAR

 HEATHROW

0370 330 6021  
[instrumentation@sunbeltrentals.co.uk](mailto:instrumentation@sunbeltrentals.co.uk)  
[testequipment@sunbeltrentals.co.uk](mailto:testequipment@sunbeltrentals.co.uk)  
[www.sunbeltrentals.co.uk](http://www.sunbeltrentals.co.uk)

