

EUROPE'S LARGEST SELECTION OF TEST & MEASUREMENT EQUIPMENT FOR HIRE

INLEC.COM

DATA-SHEET



Nationwide Low Call
0333 6000 600

WHY BUY
WHEN YOU CAN HIRE

BICOTEST T625 TDR

High Specification Cable Fault Locator



- The T625 is Bicotest's most advanced TDR cable tester. With a range of 0 to 20 kilometres- it outperforms any other TDR.
- Suitable for any type of metallic cable, including AC live in conjunction with a T600 AC blocking filter
- Superb long distance and short range faultfinding capability is achieved with a 20 V output signal, with pulse width automatically adjusted to suit the selected range.
- Accurate to 0.5 metres in short range mode.
- Dynamic range exceeds anything similar. Fault identification is crystal clear - even at the 20kilometre limit of its operating range.
- Large, uncluttered full-screen trace display for clarity.
- Eight test modes give fast fault location whether testing a single pair or comparing two pairs, one pair against any of the twelve memories, or crosstalk between two pairs.
- The T625 can measure in metres, feet or time. Dielectric can be set using propagation velocity, cable velocity or cable velocity over 2, (V/2). Onboard cable library assists fast, efficient selection.
- Fast function configuration. Dedicated keys for Cursor, Dielectric, Range, Trace Position, Pulse Amplitude and other most frequently used functions.
- HELP facility provides explanation of controls, contains sample waveforms and allows instrument to be programmed for most common cable types, giving real help to both inexperienced and expert users.
- PC compatibility, via X600 TRACEability Software System, ensures waveforms can be analysed, stored and reloaded to the TDR for on-site, dynamic comparison of the waveforms.
- Bicotest instruments are the ultimate in durability, essential in a true field-portable instrument. Bicotest is the industry standard, proven over 50 years. Comprehensive features and functions, including the high-impact-resistant screen, are tested to destruction. Fit for purpose in any climatic condition, the T625 is supplied in a Bicotest-tough, all-weather shoulder bag.


Specifications

RANGES :	0-24 m to 0-20 km in 11 ranges with zoom facility (except on lowest range) (PVF 0.67)
ACCURACY :	± 0.24% of range at 20 kms
RESOLUTION :	± 0.1% of range at 20 kms
PROPAGATION VELOCITY :	PVF : 0.300 to 0.999 V : 90 to 300 m/μs V/2 : 45 to 150 m/μs
GAIN :	0-84 dB max, selectable in 6dB steps Maximum sensitivity 4 mV full scale
PULSE CHARACTERISTICS :	Amplitude : Nominally 20 V into 100 Ohms Width : 24 ns to 2.25 μs selected with range Output Impedance : 100 Ohms Balance Control : 0 to 220 Ohms
OUTPUT :	Sockets : 2 pairs 4 mm Banana Protection : 300 V rms, 0-60 Hz
DISPLAY :	Type : High resolution LCD with backlighting (switchable) Cursor : Solid vertical line Marker Cursor : Dotted vertical line
MODES :	Real time : Line 1, Line 2, Line 1 and Line 2 (dual), Line 1 minus Line 2 (differential), X-Talk (locates crosstalk on telephone cables) Memory : Displays one of 12 memory locations; Line 1 and Memory (dual), Line 1 minus Memory (differential), Memory only
MEMORY :	12 locations that retain information until overwritten
INTERFACE :	RS 232C to printer or PC
POWER :	Internal Ni-Cad Batteries - 12 hours operation. (Auto Power-Off 5 mins after last key operation). Ext AC Adaptor, 120 V or 230 V available. Ext DC, 12 V to 20 V operating; 15 V to 20 V charging.
ENVIRONMENTAL :	Operating Temperature : -50C to +500C Storage : -200C to +650C Humidity : 93% at +400C
WATER INGRESS :	IP54
SAFETY :	IEC 1010
SIZE (mm) :	75 x 183 x 300 mm inc handle
WEIGHT (kg) :	2.9 kg inc battery
DELIVERY INCLUDES :	Weatherproof Shoulder Bag, 8 rechargeable NiCad cells, 2 x 2 m Test Leads, AC Adaptor, DC Plug, Operating Manual.
ORDERING DETAILS :	T625 Option A : 230 V ± 10%, UK Plug T625 Option B : 120 V ± 10%, USA Plug T625 Option C : 230 V ± 10%, Euro Plug
OPTIONAL ACCESSORIES	X600 TRACEability IBM-Windows compatible PC Interface Software, inc 3.5" disc, operating manual and cable T600FS Single AC Blocking Filter for use on live AC power cables T600FD Dual AC Blocking Filter for use on live AC power cables
WARRANTY:	2 years

Key features

- **Widest range in a hand-portable cable fault locator - from 24 metres to 20 kilometres**
- **Easy to operate**
- **Suitable for any type of metallic cable, including live AC in conjunction with a T600 blocking filter**
- **Large, clear waveform display of full trace for accurate diagnosis**
- **All faults clearly identified - from open circuits to wet joints**
- **Zoom for detailed examination**
- **12 memories for on-site waveform storage and comparison**
- **Measures metres, feet or time**
- **Auto programming for fast configuration**
- **Full PC compatibility for in-depth fault analysis**
- **8 test modes for fast fault location**
- **Dual input enables pair comparison and crosstalk location**
- **Comprehensive training and support services**

INLEC, supporting you to deliver a world class service, every day, in every sector ...

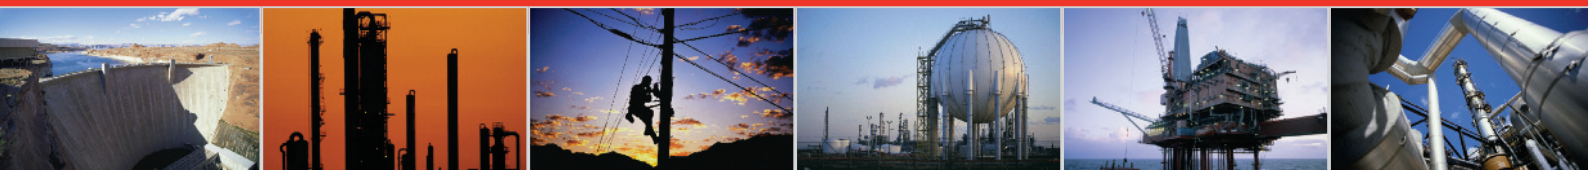

OUR COMMITMENT TO YOU

A wealth of knowledge and experience.

You can take advantage of expert advice to ensure you get the best, most appropriate and cost effective equipment for the job. We supply a wide variety of industries, so if there is another way to do the job or save you time and money we'll pass on the benefit of our experience for free.

Honest advice, just a phone call away.

If we don't have a particular item, rather than hiring you something that won't do the job, we would rather direct you to an alternative supplier. You will always be provided with full instructions and if you still need help, call our technical team on Nationwide Low Call 0333 6000 600. Our aim is to save you time, frustration and money.

Top quality equipment from major manufacturers.

With Inlec you'll get the most accurate, reliable and well-maintained equipment available. Prices are regularly reviewed to ensure you always enjoy the best value for money. We have made a significant investment in test equipment so we ensure that it's well packed to minimise damage and delay.

We really do listen to you.

You won't waste your time contacting Inlec. Every request for equipment is logged and carefully considered. Listening to our customers helps keep our product range up to date and relevant. If you are unhappy about any aspect of our service please let us know so we can put it right.

YOUR 5 WAY GUARANTEE

1 GUARANTEE SAME DAY DESPATCH

We understand why prompt delivery is important to you. So, if we confirm your order before 3pm, you are guaranteed same day despatch.

2 OUR PRICE GUARANTEE

Inlec guarantee you real value for money. Our price match policy is simple - if you can hire the same product for less elsewhere, we guarantee to match that price and reduce it by a further 10% of the difference - and still deliver our industry leading technical and customer support.

For full details check our price-match guarantee online

3 TOP QUALITY GUARANTEED

All equipment is thoroughly checked prior to dispatch to ensure you receive it in full, safe working order. Your shipment will be securely packed and include manufacturer's instructions, accessories or consumables and a valid calibration certificate where appropriate. In addition, Inlec offer a 24 hour replacement service if you decide the equipment is not suitable for your application*.

4 FRIENDLY, KNOWLEDGEABLE ADVICE GUARANTEED

Inlec are happy to provide you with free advice, from an unbeatable team of experienced, knowledgeable and friendly engineers and hire experts.

5 YOUR GUARANTEE OF THE BEST CUSTOMER SERVICE

Throughout your hire we will work hard to ensure you enjoy the very best in support and service from Inlec. We guarantee you won't find better service anywhere in the industry.

*subject to availability and conditions

Europe's leading Test Equipment Hire Specialist



LAB NO. 0535



Nationwide Low Call 0333 6000 600

Online: www.inlec.com

Inlec UK Ellerbeck Way, Stokesley Business Park, Stokesley N Yorkshire TS9 5JZ United Kingdom



CERT. NO. GB93/1773



Accredited Contractor